

2019 - 2020

High Quality Stainless Steel Category

Hospitals Hotels Public Buildings Detention Education Recreational Residential & Commercial Centers.



- Baby Change Station
- Soap Dispenser
- Paper Towel & Waste Receptacles
- Toilet Tissue Dispenser
- Jumbo Roll Toilet Dispenser
- Paper Towel Dispenser
- Waste Bin & Basket
- Bathroom Accessories
- Grab Bars & Configuration
- Coat Hook
- Shower Seat & Mirror
- Automatic Hand Dryers
- Automatic Faucet
- Automatic Soap Dispenser
- Automatic Soap Dispenser
- Sanitizer & Sign Indicator
- Waste Crating & Shower Curtains
- Toilet Seat Cover
- High Security Accessories for Correctional Facilities
- Toilet Phenolic Partition Systems
- Hospital Wall Guard & Handrails



Sanital Washroom Products Inc.

5138 Elmridge Drive
Mississauga L5M 5A3 Ontario Canada.
Tel: 001- 6472398350
www.sanital.ca



Public Washroom Products Inc.



Quality Services & Innovation

Professional manufacturing capability of High-Quality Stainless-Steel category

Sanital Washroom Product Inc.

5138, Elmridge Drive Mississauga L5M 5A3 Ontario Canada.

Tel: 001- 905 820 7369 011- 647 239 8350

mail@sanital.ca

www.sanital.ca



Contents

Overview	02
Architectural Mounting Guidelines	03
Soap Dispensers	04-09
Paper Towel Dispenser & Waste Receptacles	10-19
Toilet Tissue Dispensers	20-26
Waste Bin & Receptacles	27-31
Bathroom Accessories	32-38
Grab Bars & Configurations	39-44
Coat Hooks	45-47
Shower Seats, Basin & Baby Changing Station	48-50
Mirrors & Medicine Cabinet	51-52
Automatic Hand Dryers	53-65
Automatic Faucet	66-67
Automatic Urinal, Closet Flusher & Sanitizer	68-70
Janitorial Accessories	71-73
Correctional Facilities High Security Products	74-78
Shower Curtain & Accessories	79-81
Stainless Steel Combination Toilet	82-88
Stainless Steel Toilet	89-102
Stainless Steel Urinal	103-108
Stainless Steel Wash Basin	109-119
Stainless Steel Squatting Pan	120-126
Other Bathroom Accessories	127-127





Overview:

SANITAL Public Washroom Products Inc. sets the new standards for washroom accessories and cubicles. Our quality and value offer a perfect fit for both large and small installations. We take pride in the quality of our products only the finest components are incorporated in our production. With **ADA** compliant our products line reaches the satisfaction of our clients.


Stainless Steel 304 with high chromium and nickel content is selected for our product line because it is most suitable in areas of high hygiene standards. It provides resilient rigidity, classical elegance, and agronomical functionality.

SANITAL representatives around the globe are highly qualified to help you with the perfect solution for your accessories needs. We can plan and customize solutions for small and large projects. Our representatives can also offer expert advice on how to best take advantage of our full product line and custom fabrication abilities. SANITAL is committed to quality and service. We are confident that you will appreciate the quality and value of our products.

Guarantee:

SANITAL products are designed and produced to the highest possible standards. We guarantee all of our products for period of (2) years from defects in workmanship, imperfections, or material flaws. If any SANITAL product proves to be defective, it will be repaired, or replaced, free of charge. Any miss use or using harsh chemical on Sanital products is not covered by guarantee. Please refer to technical manual.


Architectural Mounting Guideline:

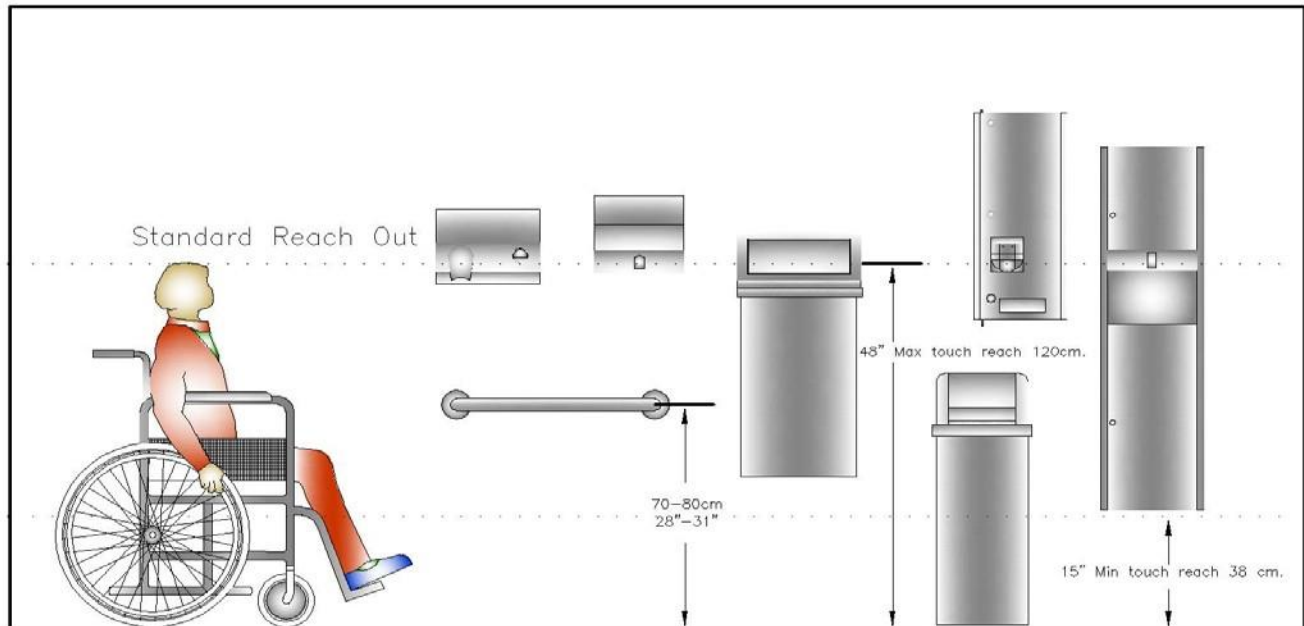

Mirrors: bottom edge of reflective surface, cannot be mounted at a height higher than 40" above finished floor. If mirrors are to be used by both ambulatory and wheel chair users, mirrors must be at least 74" (1880mm) high at their highest edge. A single full length mirror can accommodate all people including children. **Operation:** controls and other operating mechanisms shall be operable with one hand and shall not require tight grasping or twisting of the wrist. The force required to activate controls shall not point of an item can be no higher than 40" above finished floor.

Grab bars: diameter of gripping surface shall be 1-1/4" to 1-1/2" (32mm to 38mm). The space between wall and grab bar (offset) shall be no greater than 1-1/2" (38mm). Recommend 33" to 36" centerline above finished floor. Verify if a non-slip (peened) grip is required per local codes. **Toilet Paper Dispensers:** any dispenser that needs to comply with ADA code cannot have any type of controlled delivery. The minimum mounting height above finished floor is 19" to the center of the roll.

Medicine Cabinets: must be located with a usable shelf no higher than 44" (1117mm) above the finished floor. **Shower Seats:** seating area of the shower seat should be a height between 17" to 19" above the finished floor. **Tub Seats:** seats should be mounted to wall surface securely and shall not slip during use. **Protruding objects:** objects with their leading.

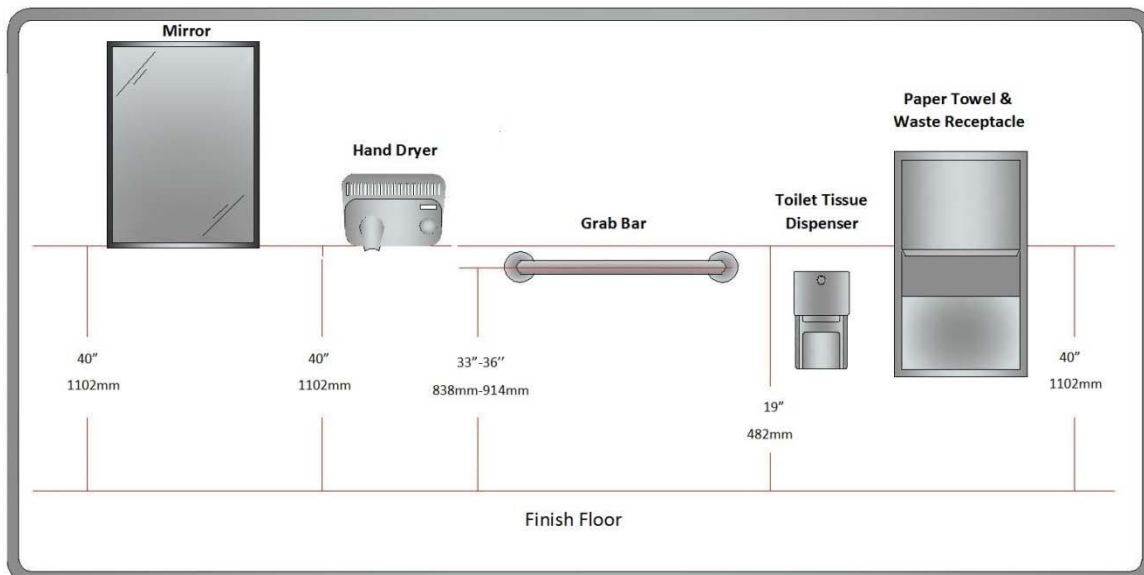




Soap Dispenser



SN-913 Satin finish
SN-913B Polished finish

Horizontal Soap Dispenser


With lock & key
Vol. 1200ml
Dimension: H121, W206, D69 (mm)
304 Stainless Steel
Packing: 20pcs/ctn. 3.8cuft.



SN-923 Satin finish
SN-923B Polished finish

Vertical Soap Dispenser


With lock & key
Vol. 1200ml
Dimension: H206, W121, D69 (mm)
304 Stainless Steel
Packing: 20pcs/ctn. 3.8cuft.



SN-713 Satin finish
SN-713B Polished finish

Square Soap Dispenser


With lock & key
Vol. 1200ml
Dimension: H158, W178, D67 (mm)
304 Stainless Steel
Packing: 20pcs/ctn. 3.6cuft.



SN01-460 Polished finish frame
& Satin finish front

U - Shape Soap Dispenser

With lock & key
Vol. 1200ml
Dimension: H203, W130, D60 (mm)
304 Stainless Steel.



SN-91399 VALVE

SN-91310 ABS Valve

SN-91396 REFILL INDICATOR





Soap Dispenser



SN-913PVB Black Valve
SN-913PVS White Valve

Horizontal Soap Dispenser

Surface mounted

304 Stainless Steel Satin finished.


All-purpose antibacterial soap valve cylinder

Capacity: 40-fl oz. (1.2 L). Soap refill

window. Concealed and wall fastening.

Overall Size: 8 1/4"W x 4 3/4"H x 3 1/2"D

210mm x 121mm x 127mm (Horizontal Mounting)



SN-923PVB Black Valve
SN-923PVS White Valve

Vertical Tank Soap Dispenser

Surface mounted

304 Stainless Steel.


All purpose antibacterial soap valve cylinder.

Capacity: 40-fl oz. (1.2 L). Soap refill

window. Concealed and wall fastening.

Overall size: 4-3/4"W x 8-1/4"H x 5"D

Vertical mounting: 121mm x 210mm x 127mm



SN-713PRB Black Valve
SN-713PRS White Valve

Square Tank Soap Dispenser

Surface mounted

304 Stainless Steel Satin Finished.


All-purpose antibacterial soap valve cylinder

Capacity: 45-fl oz. Soap refill window.

Concealed and wall fastening.

Overall Size: 7 3/8"W x 6 5/8"H x 3 3/4"D

188mm x 170mm x 95mm



SN-933PRB Black Valve
SN-933PRS White Valve

Recessed Soap Dispenser

Dispense all-purpose soaps. 20-gauge (1.0mm)

One-piece front, satin finish 304 stainless steel with Vessel attached to back.


Capacity: 50-fl oz. (1.5-L).

Pull out for filling. Conceal locking device.

Wall to push button, 1 5/8" (40mm).

Overall size: 6-3/8" x 7-1/4" x 5-3/4"

160mm x 185mm x 145mm






Soap Dispenser




SN-933 Satin finish
SN-933B Polished finish

Recessed Soap Dispenser with key
Vol. 1200ml
Dimension: H154, W260, D105 (mm)
Wall opening: H145, W250, D115 (mm)
304 Stainless Steel
Packing: 20pcs/ctn. 3.8 cu ft.




SN-933C Polished finish

Coned Soap Dispenser
With lock & key
Vol. 350ml
Dimension: H167, W156, D152 (mm)
304 Stainless Steel
Packing: 24pcs/ctn. 2.1cuft.




SN-631 Satin finish

Push-up Soap Dispenser
Vol. 500ml
Zinc chrome plated with Polyethylene globe
Dimension: H165, W93, D76 (mm)
Packing: 50pcs/ctn. 4.6cuft.




SN-628-4-SSS Spout Length: 4 inch
SN-628-5-SSS Spout Length: 5 inch
SN-628-6-SSS Spout Length: 6 inch

LAV- Basin Soap Dispenser
Vol. 500ml
304 Stainless Steel for piston, spout & container
Chrome plated brass for connecting tube,
Globe adapter and 51mm dia. cover
Packing: 30pcs/ctn. 5.0cuft.



SN-628-4 Spout Length: 4inch
SN-628-5 Spout Length: 5inch
SN-628-6 Spout Length: 6inch

LAV- Basin Soap Dispenser
Vol. 1000ml
304 Stainless Steel for spout ABS plastic
for piston & container and 51mm dia. covers
Packing: 30pcs/ctn. 5.0cuft.



Soap Dispenser




SN-633 Satin finish

Soap Dispenser with key
Vol. 500ml
Dimension: H164, W88, D58 (mm)
304 Stainless Steel
Packing: 30pcs/ctn. 2.8cuft.




SN-1902 Satin finish
SN-1902B Polished finish

Vertical Liquid Soap Dispenser
With lock & key
Vol. 1800ml
Materials: Type 304 Stainless Steel
Packing: 16pcs/ctn. 2.6cuft.




SN-30 ABS White

Manual Liquid Soap Dispenser
Vol. 1000ml.
Dimension: H225, W132, D95 (mm)
Packing: 30pcs/ctn. 4.1cuft.




SN-0170WB ABS White

Manual Liquid Soap Dispenser
Vol. 1000ml.
Dimension: H115, W245, D110 (mm)
Packing: 30pcs/ctn. 4.4cuft.



SN-0870WG ABS White

Manual Liquid Soap Dispenser
Vol. 1000ml.
Dimension: H225, W132, D95 (mm)
Packing: 30pcs/ctn. 3.8cuft.






Automatic Soap Dispenser



SN-950SA Satin finish

Automatic Soap Dispenser


Vol. 950ml
 # 304 Stainless Steel Casing
 Container assembly.
 Battery: C 1.5V * 3pcs (not included)
 Dispenses soap 10,000 times by alkaline battery
 One drop: 1~1.5cc
 Dimension: H268, W110, D107 (mm)
 Packing: 12pcs/ctn. 2.4cuft.



SN-950DA ABS white

Automatic Soap Dispenser


Vol. 950ml
 ABS casing with key
 Container assembly.
 Battery: C 1.5V * 3pcs (not included)
 Dispenses soap 10,000 times by alkaline battery
 One drop: 1~1.5cc
 Dimension: H270, W110, D115 (mm)
 Packing: 12pcs/ctn. 2.4cuft.



SN-RSD01 Casing: # 304 Stainless Steel **SN-RSD02** Casing: Aluminum Steel

Automatic Soap Dispenser


Vol. 900ml
 Thickness 1.0mm
 Battery: 1.5V * 6pcs (not included)
 Dispenses: 10,000 times by alkaline battery
 One drop: 1~1.5ml
 Packing: 12pcs/ctn. 2.4cuft.



SN-1450W ABS white

Automatic Soap Dispenser

Vol. 1000ml
 ABS casing with key
 Container assembly.
 Battery: C 1.5V * 4pcs (not included)
 Dispenses soap 10,000 times by alkaline battery
 One drop: 1~1.5cc
 Dimension: H120, W255, D115 (mm)
 Packing: 20pcs/ctn. 3.6cuft.






Automatic Soap Dispenser



SN-BC633 Counter Mounted Infrared / Sensor Soap Dispenser

Specifications

- Electronic soap dispenser activated by an infrared sensor. When the user places their hand within the sensor range, the soap dispenser delivers the soap.
- Chrome plated brass
- 1.8ml of soap per dispensing cycle. Dose is adjustable in factory or on-site
- 2 year guarantee
- Powered by 12v Transformer ONLY
- For information on power supply and connectors
- 1,000ml refillable plastic container. (no need to purchase unique soap reservoirs like for other soap dispensers, just to refill the soap or algogel)
- The peristaltic pump allows the use of different soap viscosities, including antibacterial gels
- Easy to use refill button (either on the dispenser pump, or by means of the Remote Control)
- Ideal touch free electronic taps – suits the design and look
- Bottle support kit available for remote installation



SN-KSD1 Vertical Wall Mounted Soap Dispenser


Specifications

Material: Stainless Steel Type 304


Container: 18-8S

Capacity: 400 ml


Dispense Volume: One drop 2 ml



SN-AJFG108 Automatic Counter Mounted Soap Dispenser



▲ DC (6V x Alkaline) Installation Instruction

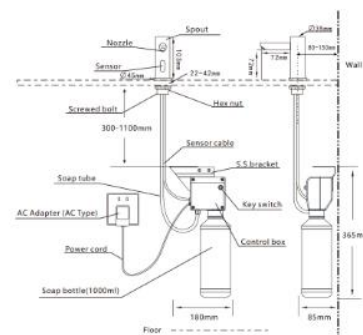

▲ AC (110-240V) Power Installation Instruction






Paper Towel Dispenser



SN-918 Satin finish
SN-918B Polished finish

Paper Towel Dispenser

With lock & key
Vol. 250 c-fold or 300 multi folds
Dimension: H203, W280, D102 (mm)
304 Stainless Steel
Packing: 10pcs/ctn. 3.5cuft.



SN-928 Satin finish
SN-928B Polished finish

Paper Towel Dispenser


With lock & key
Vol. 450 c-fold or 600 multi folds
Dimension: H369, W280, D102 (mm)
304 Stainless Steel
Packing: 8pcs/ctn. 4.9cuft.



SN-938 Satin finish
SN-938B Polished finish

Paper Towel Dispenser

With lock & key
Vol. 250 c-fold or 300 multi folds
Dimension: H300, W270, D120 (mm)
304 Stainless Steel
Packing: 8pcs/ctn. 4.0cuft.



SN-948 Satin finish
SN-948B Polished finish

Paper Towel Dispenser


With lock & key
Vol. 450 c-fold or 600 multi folds
Dimension: H397, W260, D92 (mm)
304 Stainless Steel
Packing: 8pcs/ctn. 4.3cuft.



SN-998 Satin finish
SN-998B Polished finish

Paper Towel Dispenser

With lock & key
Vol. 450 c-fold or 600 multi folds
Dimension: H397, W260, D92 (mm)
304 Stainless Steel
Packing: 8pcs/ctn. 4.3cuft.





Paper Towel Dispenser



SN-737 ABS White


Mechanism Roll Paper Towel Dispenser

Materials: ABS

Vol. Holds 205 or 230mm wide roll
800ft. long in preset lengths 65, 100,
125mm per stroke

Size: H376, W308, D240 (mm)

Packing: 4sets/ctn. 3cuft.



SN-158 Black transparent cover

SN-158W White whole set

Center Pull Paper Towel Dispenser with key


Paper roll diameter maximum: 22cm

Paper roll length maximum: 26cm

Size: H400, W245, D255 (mm)

Materials: ABS

Packing: 6sets/ctn. 6.2cuft.



SN-258 Black transparent cover

SN-258WG White whole set

Center Pull Paper Towel Dispenser with key


Paper roll diameter maximum: 22cm

Paper roll length maximum: 26cm

Size: H295, W240, D250 (mm)

Materials: ABS

Packing: 6sets/ctn. 6.2cuft.



SN-0335A ABS Plastic

Automatic Paper Towel Dispenser

Battery: Dc4 x 1.5V R20S, Battery life: 12~15 pcs

Paper roll. Size: 285 x 228 x 390mm

Paper dimension: 190~200mm wide, dia.≤200mm

Each dispenses length: 200, 250, and 300 (mm)

Unit weight: 4kg. Package (4PCS): 16kg



SN-0336WA White Whole set

SN-0336A Black transparent cover

Automatic Paper Towel Dispenser

Battery: Dc4 x 1.5V R20S, Battery life: 12~15 pcs


Paper roll. Size: 295 x 24 x 390mm

Paper dimension: 190~200mm wide, dia.≤200mm

Each dispenses length: 200, 250, and 300 (mm)

Materials: ABS

Unit weight: 4kg. Package (4PCS): 16kg





Paper Towel Dispenser



SN-PBD34-45

Built in Tissue Paper Dispenser

Specifications:


Materials: 18-8 S, Type-304, Stainless Steel

Finish: 304 Stainless Steel Satin

Application: Wash Basin Area

Capacity: 600 C-fold or 800 Multifold Paper Towels

Filling: Loading from bottom

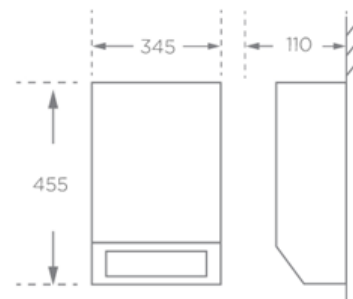

SN-CZQ20K

Satin Finish

Automatic Paper Towel Dispenser

304 stainless steel


Capacity: 7 1/2"~8" (190mm~200mm)

Wide roll, 8"(200mm) diameter

Accurate CPU-control sensor system

Adjustable paper setting. Preset 8" or 10" or 12"

Battery (auto): 4 D-cell alkaline batteries.






Paper Towel Dispenser



SN-CZQ20KS Satin Finish

Manual Paper Towel Dispenser


304 stainless steel
Door secured with full length stainless steel
Piano hinge and tumbler lock keyed.
Vol. Standard core 8" or 9"W x 800'L towel roll.
Operation: Towel dispenser delivers preset
Length of towel (2-1/2", 4" or 5" per stroke)
Operates with less than 5 lbs. of force



SN-5014 Satin finish

Recessed Paper Towel Dispenser


With lock & key
Vol. 400 multi folds paper to towels
Wall opening: H389, W275, D102(mm)
304 stainless steel
Packing: 1 set/ctn. 1.05cuft.



SN-5011S Satin finish

Paper Towel Dispenser & Waste Receptacle Recessed

With lock & key
Vol. Dispenses 250 multi-fold paper towels
Provided with removable 5.5 ltr. Waste container
Dimension: H660, W303, D102 (mm)
304 Stainless Steel
Packing: 1 set/ctn. 2.0cuft.

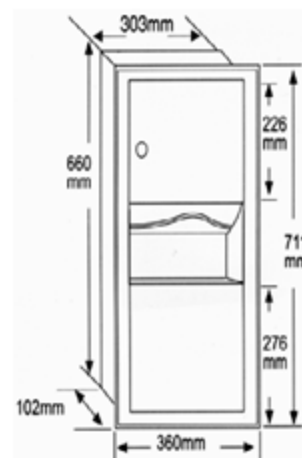




Paper Towel Dispenser & Waste Receptacles



SN-5015 Satin finish

Recessed Paper Towel Dispenser


With lock & key
Vol. 250 multi folds paper to towels
With removable 6 ltr. Waste container
Wall opening: H790, W280, D102 (mm)
304 Stainless Steel
Packing: 1 set/ctn. 1.8cuft.

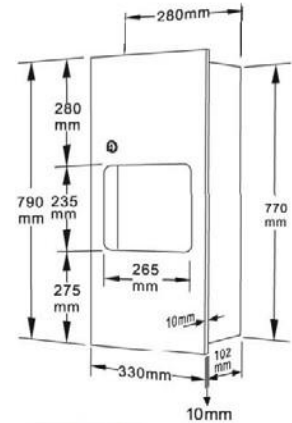

SN-5015E Satin finish

Wall mounted Paper Towel Dispenser


With lock & key
Vol. 400c-fold paper to towels
With removable 6 ltr. Waste container
Size: H770, W300, D150 (mm)
304 Stainless Steel
Packing: 1 set/ctn. 1.8cuft.

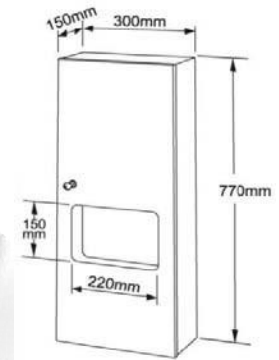

SN-2914 Satin finish

Surface mounted Paper Towel Dispenser & Waste Receptacle


With lock & key
Vol. Dispenses 350 C-fold or 475 multi-folds Paper towels
Capacity: 2 gal. (7.6 ltr.)
Dimension: H710, W380, D110 (mm)
304 Stainless Steel with radius edges.
Packing: 1 set/ctn. 3.0cuft.

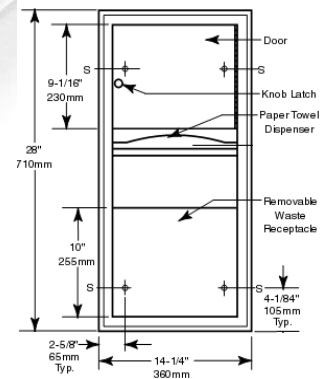

SN-5012A Vol.:15ltr.
SN-5012B Vol.:13.5ltr.

Recessed Waste Receptacle

With removable waste container.
304 Satin Stainless Steel.
Dimension: H660, W305, D105 (mm)
Packing: 1 set/ctn. 2.0cuft.

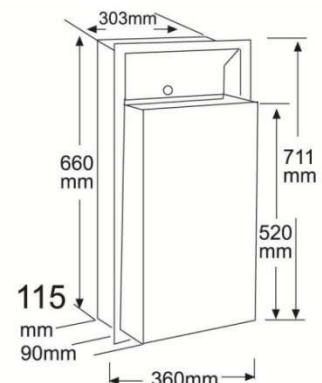

Paper Towel Dispenser & Waste receptacles



SN- 5011A Satin finish

Recessed Paper Towel Dispenser & Waste receptacle

Vol. Dispenses 700 Multi-fold paper towels.
Provided with removable **17 ltr.**, waste container.
Rough wall opening: **H1380, W315, D100 (mm)**
Material: 304 Stainless Steel

SN- 5011B Satin finish


Recessed Paper Towel Dispenser & Waste receptacle

Vol. Dispenses 700 Multi-fold paper towels.
Provided with removable **21 ltr.**, waste container.
Rough wall opening: **H1480, W355, D110 (mm)**
Material: 304 Stainless Steel

SN- 5011C Satin finish

Recessed Paper Towel Dispenser & Waste receptacle

Vol. Dispenses 700 Multi-fold paper towels.
Provided with removable **27 ltr.**, waste container.
Rough wall opening: **H1835, W315, D102 (mm)**
Material: 304 Stainless Steel

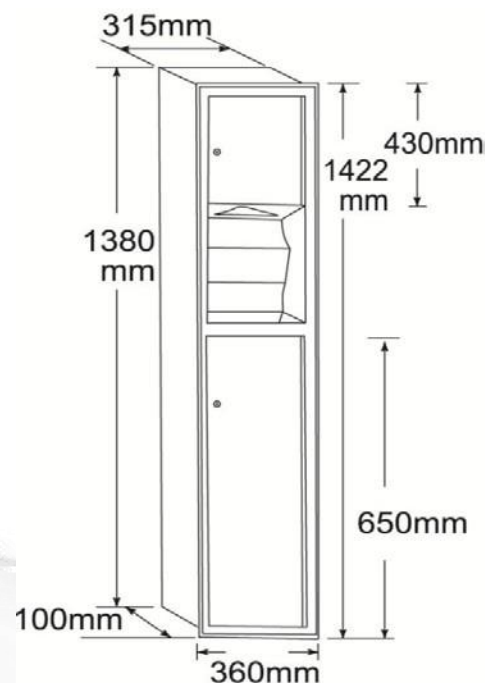

SN- 5013A Satin finish


Recessed Paper Towel Dispenser & Waste receptacle

Vol. Dispenses 700 Multi-fold paper towels.
Provided with removable **15 ltr.** waste container.
Rough wall opening: **H1380, W315, D102 (mm)**
Material: 304 Stainless Steel Satin finish.

SN- 5013B Satin finish

Recessed Paper Towel Dispenser & Waste receptacle

Vol. Dispenses 700 Multi-fold paper towels.
Provided with removable **20 ltr.** waste container.
Rough wall opening: **H1480, W355, D102 (mm)**
Material: 304 Stainless Steel Satin finish.

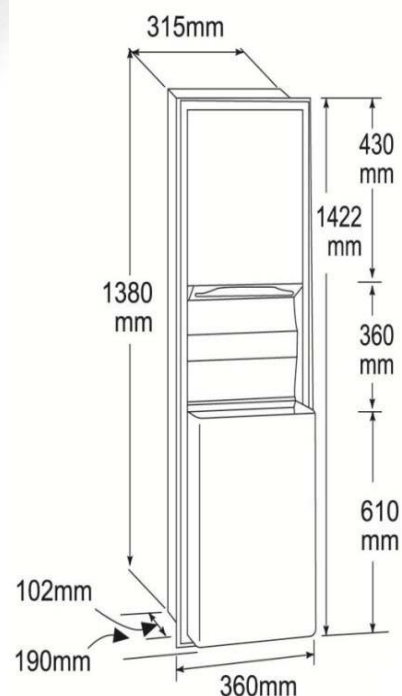




Paper Towel Dispenser & Waste receptacles



- SN-U-659AW** Recessed
SN-U-659S2 2" semi-recessed collar,
 2" wall opening, 51mm
SN-U-659SM Full surface mounted collar.

Body & flange: Fabricated of #22 ga. stainless steel with #304 satin finished matching cabinet with 1/4" returns. (No miters or welds). Towel with dispenser roll towel mechanism is fabricated of #20 ga. steel formed for rigidity. Unit will accommodate One 8" or 9" wide roll with a max O.D. of 7 7/8". Towel length dispensed has three adjustable settings. Hinge: Full length, heavy duty, stainless steel piano hinge. Overall Size: 362mm W x 1372mm H x 271mm D
 Wall Opening: 324mm W x 1334mm H x 271mm D
 Capacity: One standard roll up to 8" wide (non-perforated)
 Waste Capacity: 12 gallons (1.60 cu ft.)

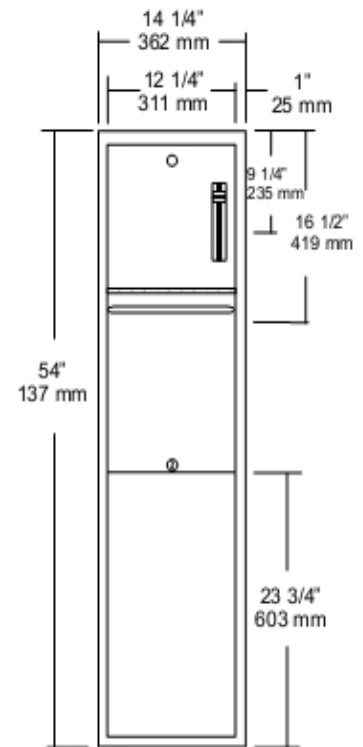


- SN- 5016E** Surface Mounted
SN- 5016 Recessed

Specifications:

304satin stainless steel
 Vol.: 450multi-fold paper towels
 With removable 13.5 liters waste container

Description:

Dimension: H1350, W330, D112 (mm)
 Wall opening: H1360, W290, D105 (mm)
 Packing: 1set, 1.8cuft

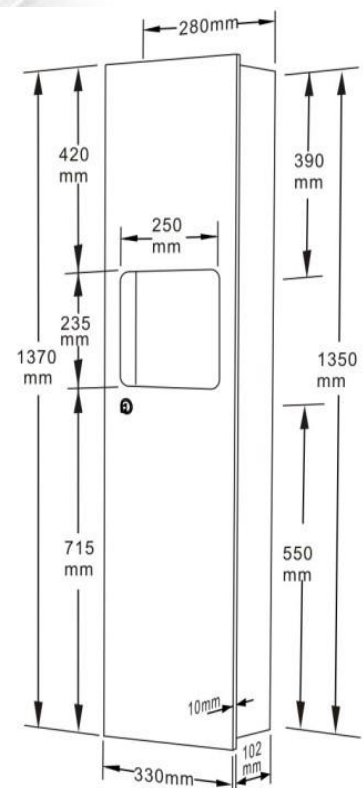



Paper Towel Dispenser, Hand Dryer & Waste receptacles




SN-22SCA(4") Recessed

Specifications:

Materials: # 304 Stainless Steel
 Operation Power: 2200 W
 Designed with 105 degree C (221 degree F) thermostat. Heater assembly: Designed with 85 degree C (185 degree F) thermostat
 Designed with 141 degree C (323 degree F) Thermal cut-off. Dryer shall deliver: 314.5 m³/h (185CFM).--50Hz/60Hz
 Air speed : 20 m/s (72 mi/hr). --50Hz/60Hz
 Sound level: 70 +/- 3 dB
 Approximately 20-25 seconds drying time
 Brush motor : 200W, 7500 R.P.M. --50Hz/60Hz
 Drip proof: IPX1
 Net Weight: 20.2 kg; Shipping Weight: 23.6 kg


Door, manufactured from 1.2mm (18 gauge), type-304 18/8 stainless steel with satin-finish, and tumbler locks keyed
 Dimension: W: 330 x H: 1830 x D: 100 (mm)

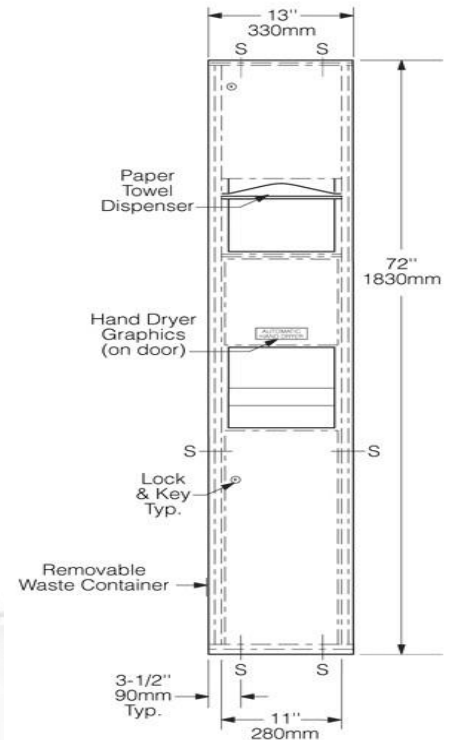

SN-8225B Recessed

Specifications:

Made of type 304, 22 gauge (0.8mm) stainless steel with satin finish. Manual paper towel dispenser : Multi-fold paper towel.
 Auto Hand Dryer: Controlled by CPU with digital Circuit and infrared sensor, touch free. With strong Warm air, dries hands quickly. Includes thermal fuse And thermostat, double safeguard.
 Waste receptacle: 23 liter big capacity and easy to clean. 1 key for 3 locks.
 Voltage: 220V-240V~50Hz
 Rated Power: 2500W
 Current: 10.9A
 Air Volume: 270m³/h
 Air Velocity: 30m/s
 Dimension: W: 370 x H: 1600 x D: 70 (mm)

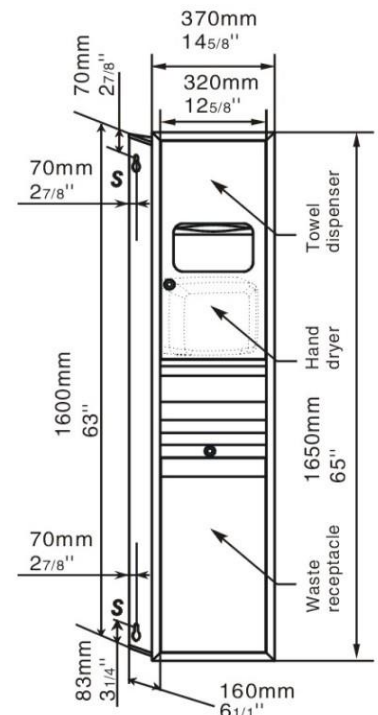




Paper Roll Towel Dispenser, Hand Dryer & Waste receptacles



SN-GSG8225Z Recessed

Specifications:


Made of type 304, 22 gauge (0.8mm) Stainless Steel with satin finish.
 Auto paper towel dispenser: Adopt infrared Sensor, touch free. Three dispense lengths are available, reloaded with full roll automatically When finish an existing roll.
 Auto Hand Dryer: Controlled by CPU with digital Circuit and infrared sensor, touch free. With strong Warm air, dries hands quickly. Includes thermal Fuse and thermostat, double safeguard.
 Waste receptacle: 23 liter big capacity and easy to clean. 1 key for 3 locks.
 Voltage: 220V-240V~/50Hz
 Rated Power: 2500W
 Current: 10.9A
 Air Volume: 270m³/h
 Air Velocity: 30m/s
 Auto roll towel dispenser: Power: DC 4 x 1.5 R20s
 Paper roll size: W 195mm~200mm x Dia.: 200mm
 Dimension: W: 370 x H: 1600 x D: 70 (mm)

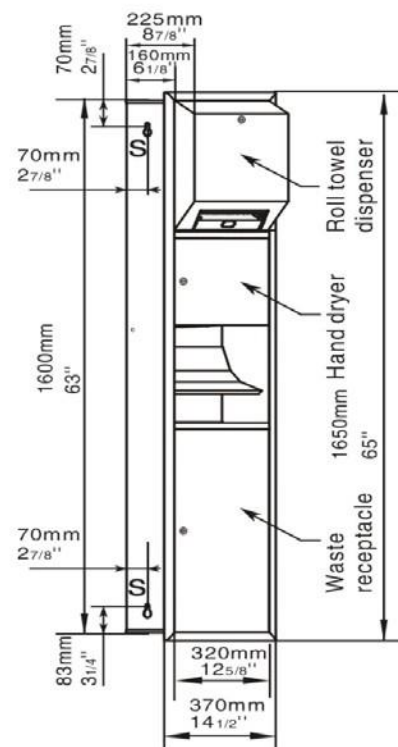

SN-GSG8225S Recessed

Specifications:

Made of type 304, 22 gauge (0.8mm) Stainless Steel with satin finish.
 Manual paper towel dispenser: Paper adopt Comes out automatically when pulling down to Handle, with the indented blade, tear out the paper easily. Auto Hand Dryer: Controlled by CPU with digital circuit and infrared sensor, touch free. with strong warm air, dries hands quickly. Includes thermal fuse and thermostat, double safeguard.
 Waste receptacle: 23 liter big capacity and easy to clean. 1 key for 3 locks.
 Voltage: 220V-240V~/50Hz
 Rated Power: 2500W
 Current: 10.9A
 Air Volume: 270m³/h
 Air Velocity: 30m/s
 Paper roll size: W 195mm~200mm x Dia.: 200mm
 Dimension: W: 370 x H: 1600 x D: 70 (mm)

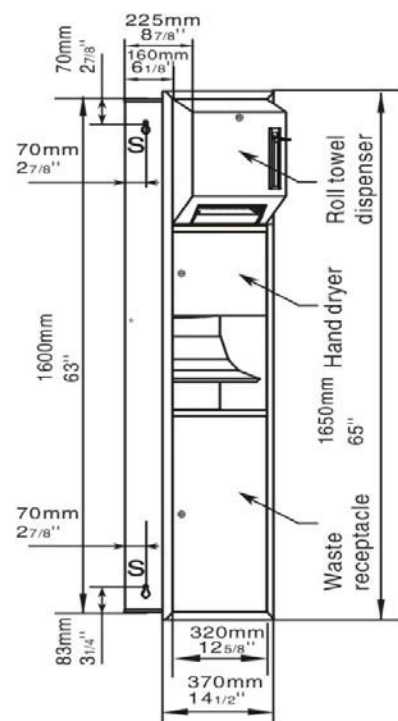



Paper Roll Towel Dispenser, Hand Dryer & Waste receptacles



SN-422-70 Hands Free Combination Towel / Waste Receptacle

Specifications

Hands Free Combination Towel / Waste Receptacle

Code 422A-70:Stainless steel type 304, Semi Recessed 4"

Code 422C-70:Stainless steel type 304, Surface Mounted

Code 427-70:Stainless steel type 304, Recessed 4"

Site Location: Stainless steel combination dispenser / waste receptacle can be mounted into any wall configuration requiring a minimum of 4" depth any wall configuration requiring a minimum of 4" depth.

Touch Free: Large detection zone senses hand when placed in a natural position under dispenser to deliver a towel length range of 6-9". Towel delivery is quiet and uniform. Hands free dispenser reduces paper flow, and provides maximum hygiene. Operates with 4 "D" size alkaline batteries or plug in AC adaptor. 4 alkaline batteries have been independently tested and found to provide 35,000 hand dries. Designed to dispense jumbo roll towels max. 8" diameter(4" reserve roll). Cabinet door hinged with full length stainless piano hinge and is secured with keyed tumbler lock. Takes 24"x36" garbage bag and a 1 1/2" paper core.

Materials: All stainless welded construction with locking removable waste bin. Semi recessed design provides large capacity receptacle with minimum space. Code 427 provides extra large waste capacity. Waste receptacle is completely removable for convenient maintenance. Comes with standard bag holder apparatus. Recessed wall body and waste container are 22gauge stainless steel type 304 No. 4 brushed finish.

Capacity: Code 422-70A: 11 gal. (50 liters), shipping weight: 50 lbs. (22.6 kg.),
Code 422-70C: 11 gal. (50 liters), shipping weight: 58 lbs. (26.3 kg.), Code 427-70: 15 gal. (68 liters), shipping weight: 59 lbs. (26.6 kg.)






Toilet Tissue Dispenser



SN-225 Polished finish

Single Toilet Tissue Dispenser


Wall mounted
Vol. one standard toilet tissue roll
Dimension: H90, W125, D100 (mm)
304 Stainless Steel
Packing: 50 pcs/ctn. 3.0cuft.



SN-260RSB Polished finish

Recessed Toilet Tissue Dispenser


Vol. one standard toilet tissue roll
Dimension: H157, W157, D45 (mm)
304 Stainless Steel
White PP roller
Packing: 50pcs/ctn.4.3cuft.



SN-261 Polished finish
SN-261SS Satin finish

Single Toilet Tissue Dispenser


Wall mounted
Vol. one standard toilet tissue roll
Dimension: H162, W162, D52 (mm)
304 Stainless Steel
Packing: 24 pcs/ctn. 2.5cuft.



SN-261R Polished finish

Recessed Toilet Tissue Dispenser


Vol. one standard toilet tissue roll
Chrome plated zamak brackets & plastic roller
Wall opening: H160, W160, D45 (mm)
304 Stainless Steel
Packing: 24 pcs/ctn. 2.5cuft.



SN-145 Polished finish

Toilet Tissue Dispenser

Vol. one standard toilet tissue roll
304 Stainless Steel
Size: H127, W148, D65 (mm)
Packing: 30 pcs/ctn. 1.7cuft.

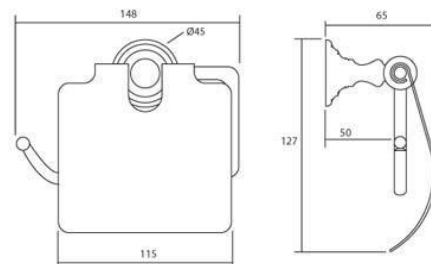




Toilet Tissue Dispenser



SN-263 Polished finish
SN-263S Satin finish

Double Toilet Tissue Dispenser


Wall Mounted
Vol. two standard rolls
Size: H162, W325, D52 (mm)
304 Stainless Steel
Packing: 12 pcs/ctn. 2.5cuf.

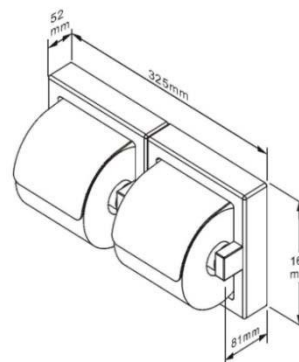

SN-263R Polished finish
SN-263RS Satin finish

Double Toilet Tissue Dispenser


Recessed
Vol. two standard rolls
Size: H160, W322, D28 (mm)
304 Stainless Steel
Packing: 12 pcs/ctn. 2.5cuf.



SN-1025D Polished finish

Double Toilet Tissue Dispenser


Theft resistant spindle
Wall mounted
Vol. two standard rolls
304 Stainless Steel
Packing: 6 pcs/ctn. 2.4cuf.

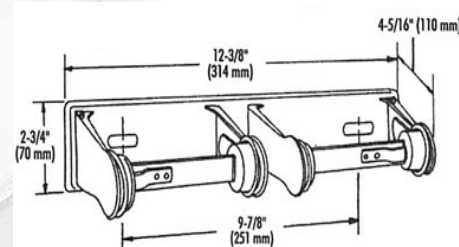

SN-1025 Polished finish

Single Toilet Tissue Dispenser


Theft resistant spindle
Vol.: one standard toilet tissue roll
304 Stainless Steel
Packing: 24 pcs/ctn. 2.5cuf.



SN-360 Bright finish

Single Toilet Tissue Dispenser

Vol.1 standard toilet tissue roll
Zinc die-casting, chrome plated & chrome
Plastic roller
Dimension:H46, D79, W: adjustable (mm)
Packing: 50pcs/ctn. 1.9cuf






Toilet Tissue Dispenser



SN-360S Polished finish

Single Toilet Tissue Dispenser


Vol.1 standard toilet tissue roll
304 Stainless Steel
Plastic roller
Dimension:H52,D98,W: adjustable (mm)
Packing: 72pcs/ctn. 2.7cuft



SN-370S Polished finish

Double Toilet Tissue Dispenser


Wall Mounted
Vol. two standard rolls
Size: H51, W385, D51 (mm)
304 Stainless Steel
Packing: 12 pcs/ctn., 2.5cuft.

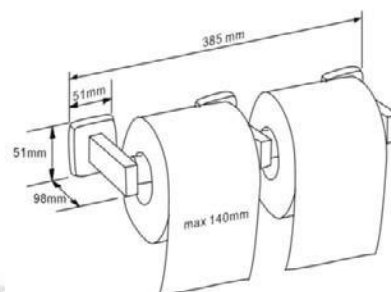

SN-130A Polished finish

Single Toilet Paper Holder


Wall mounted
Vol.: One standard toilet tissue roll.
Dimension: H92, W150, D75 (mm)
304 Stainless Steel
Packing: 50 sets/ctn.1.8cuft.



SN-8302W Polished finish

Double Toilet Tissue Dispenser


With lock & key
Vol. two standard rolls or folded tissue
Size: H120, W265, D103 (mm)
304 Stainless Steel
Packing: 15pcs/ctn. 4cuft.



SN03-200 Polished finish

Towel Ring

Wall mounted
304 Stainless Steel
Packing: 72 pcs /ctn. 2.7cuft.






Toilet Tissue Dispenser




SN-265 Polished finish

Double Toilet Tissue Dispenser
Wall Mounted
Vol. two standard rolls
Size: H325, W162, D52 (mm)
304 Stainless Steel
Packing: 12pcs/ctn. 2.5cuft.

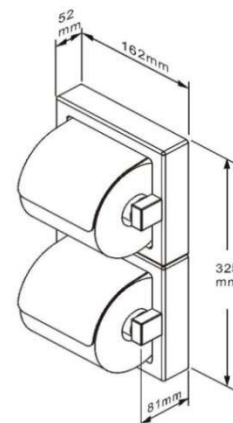


SN-265R Polished finish

Double Toilet Tissue Dispenser
Recessed
Vol. two standard rolls
Size: H322, W160, D25 (mm)
304 Stainless Steel
Packing: 12pcs/ctn. 2.5cuft.

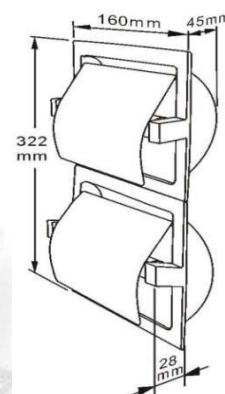


SN-800 Satin finish
SN-800B Polished finish

Double Toilet Tissue Dispenser
With lock & key
Vol. two standard rolls
Cabinet & Mechanism
304 Stainless Steel
Packing: 6 pcs/ctn. 2.4cuft.



SN-800R Satin finish
SN-800RB Polished finish

Double Toilet Tissue Dispenser
Recessed
With lock & key
Vol. two standard rolls
Cabinet & Mechanism
304 Stainless Steel
Packing: 6 pcs/ctn. 2.4cuft.

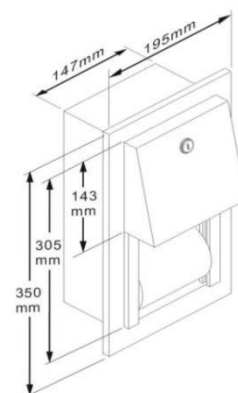


Jumbo Toilet Tissue Dispenser



SN-92520 Satin finish, inner core dia.40mm
SN-925B20 Polished finish, inner core dia.40mm


SN-92520-60 / SN-925B20-60
 Inner core dia. 60mm

FD-92520-72 / FD-925B20-72
 Inner core dia. 72mm
 Vol. 250m long up to 4-1/4" 2-ply tissue
 Packing: 6pcs/ctn. 2.7cuft.




SN-935 inner core dia. 40mm
SN-935-60 inner core dia. 60mm
SN-935-72 inner core dia.72mm

304 Stainless Steel Satin finish.
 With lock & key
 Vol.: 350m long up to 4-1/4, 2-ply tissue
 Packing: 6pcs/ctn. 4cuft.




SN-935M
Multi Roll Tissue Dispenser.
 Vol. six standard toilet tissue rolls
 Size: H362, W360, D115 (mm)
 Inner core diameter 40mm
 Material: # 304 Satin Stainless Steel
 Packing: 6pcs/ctn. 4cuft.




SN-945 Satin finish, inner core dia. 40mm
SN-945B Polished finish, inner core dia.40mm
SN-945-60 / SN-945B-60 inner core dia. 60mm
SN-945-72 / SN-945B-72 inner core dia.72mm

304 Satin Stainless Steel.
 With lock & key
 Vol.: 300m long up to 4-1/4 2-ply tissue
 Packing: 6pcs/ctn. 3.2cuft.



SN-995 Satin Finish
SN-995B Polished Finish

Dual Roll Tissue Dispenser
 Material: # 304 Satin Stainless Steel
 Packing: 4pcs/ctn. 3.31cuft



Jumbo Toilet Tissue Dispenser

SN-935

Jumbo Roll Toilet Tissue Dispenser / Holder



Specifications

Materials: Type 304 stainless steel

Item No.

SN-935 Inner core Dia. 40mm with satin finish

SN-935P Inner core Dia.40mm with polished finish


Lockable: Tumbler locks

Size: W-322x H-326x D-123 (mm)

Core diameter: 38mm plus 2pcs of O-Ring to be 53mm (68mm for other choice)

Volume: 250M long up to 4-1/4" 2-ply tissue

Packing: 6pcs/ctn./ G.W.10kgs/2.7cuft/0.0765cbm



SN-325W inner core dia. 71mm

SN-325WS inner core dia. 49mm

SN-325WSS inner core dia. 42mm

White Whole Set

With key

Vol.: 250m long up to 4-1/4 2-ply tissue

Packing: 12pcs/ctn. 5.6cuft.

ABS Toilet Tissue Dispenser



SN-911W

Roll Tissue Dispenser

Materials: ABS
Size: H300, W280, D117 (mm)
Packing: 12pcs/ctn. 5.2 cuft.



SN-425-03

SN-425-03-60 / SN-425W-60


Inner core dia. 42mm / 72mm adjustable.
(Dark blue transparent /White back cover)

SN-425W

SN-425-03-60 / SN-425W-60

Inner core dia. 42mm / 72mm
(White Whole Set)


Vol.: 250m long up to 4-1/4 2-ply tissue, 2 roll.
Packing: 6pcs/ctn. 5.1 cuft.



SN-3058 Black transparent cover **SN-3058 WG** White whole set

Paper Towel Dispenser

Materials: ABS
Size: W262, H328, D116 (mm)
Packing: 10pcs/ctn. 4.0 cuft.



SN-3068 ABS white

Paper Towel Dispenser

Materials: ABS
Size: W262, H328, D116 (mm)
Packing: 10pcs/ctn. 4.0 cuft.





Waste Bin







- SN-101** Vol.1.5ltr.
SN-102 Vol.10ltr.
SN-103 Vol.18ltr
SN-105 Vol. 32 ltr.

TRASH CAN
 # 304 Polished S/S
 body & lid

Packing:

- SN-101: 24sets/ctn.2.5cuft
 SN-102: 1set/ctn.0.7cuft
 SN-103: 1set/ctn.2.5cuft
 SN-105: 1set/ctn.2.3cuft

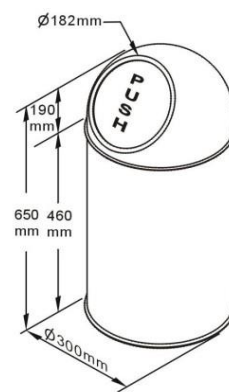
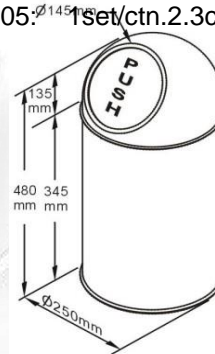




- SN-109** Vol.3ltr.
SN-110 Vol.5ltr.
SN-111 Vol.12ltr.
SN-112 Vol.28ltr

ROUND DUSTBIN
With Foot Pedal
 # 304 Polished S/S
 With removable waste
 Receptacle in plastic.

Packing:

- SN-109: 6sets/ctn.2.6cuft
 SN-110: 1 set/ctn.0.7cuft
 SN-111: 1set/ctn.2.5cuft
 SN-112: 1set/ctn.2.3cuft

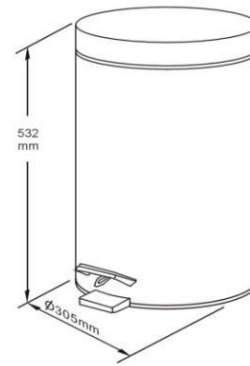

Waste Bin




SN-149 Vol.3ltr.
SN-150 Vol.5ltr.
SN-151 Vol.12ltr.
SN-152L Vol.30ltr.

**ONETOUCH
Waste Bin**
 # 304 Polished S/S
 with removable
 receptacle in plastic.

Packing :


SN-149: 6sets/ctn.2.5cuft
 SN-150: 1set/ctn. 0.72cuft
 SN-151: 1set/ctn.1.1cuft
 SN-152L: 1set/ctn.2.5cuft

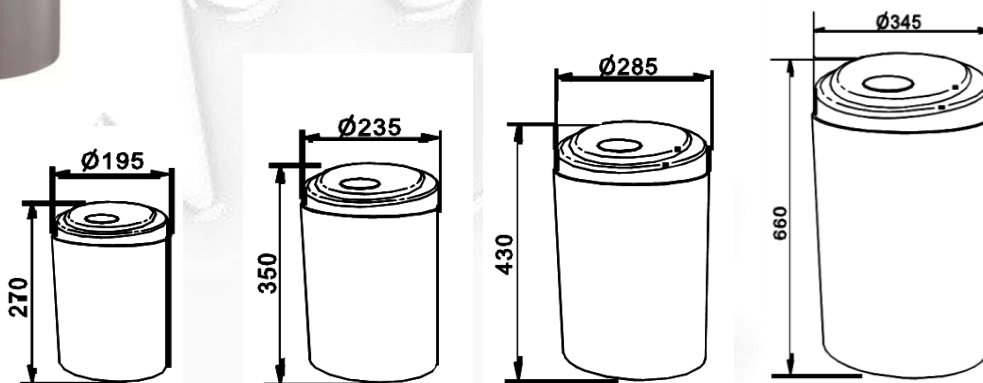

SN-106 Polished finish.
SN-106B Black Powder coated.
SN-106G Gold Powder coated.

Round Ash-N-Trash Receptacle

304 Stainless Steel
 Vol. 12 ltr.
 Combination removable ashtray and waste
 Receptacle in plastic.
 Packing: 1set/ctn. 1.6cuft.
 Packing: 4sets/ctn.7.2cuft for AE-106 & AE-106B

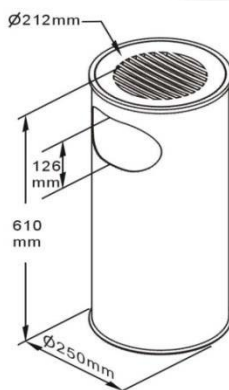

Plastic Trash Can



SN-107


Sanitary Napkin Disposal

Materials: ABS plastic, cover long & short pedal

Size: H585, W445, D170 (mm)

Vol.: 20 liters

Packing: 2 pcs/ctn. 3.85cuft.

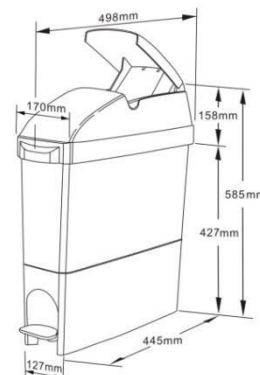

SN-7110

Automatic Trash Can


Touch free

Materials: ABS

Vol.: 12.5 liters

Size: H440, W220, D296 (mm)

Packing: 8 pcs/ctn., 7.5cuft.



SN-7112

Automatic Trash Can


Touch free

Material: ABS

Vol. : 32 liters

Size: H335, W275, D250 (mm)

Packing: 2sets/ctn. 3.8cuft.




SN-228CS Vol. 45liters

SN-228CB Vol. 60liters

Waste Bin

ABS plastic top & cover electrolytic,
Zinc-coated sheet steel body for the best
Protection from corrosion.

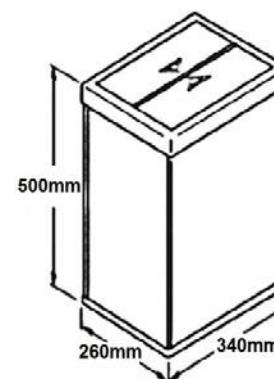


Waste Receptacle



SN-910

Sanitary Napkin Disposal


Materials: # 304 S/S Satin finish.
Size: H585,W445,D170 (mm)
Vol.: 20 liters
Packing: 2 pcs/ctn.,3.85cuft.



SN-921

Waste Receptacle


Wall mounted
Materials: # 304 S/S Satin finish.
Top & bottom edges hemmed for safety
Vol.: 23 liters
Size: H440, W220, D296 (mm)
Packing: 1pc/ctn.,1.1cuft.



SN-922

Waste Receptacle

Wall mounted
Materials: # 304 S/S Satin finish.
Top & bottom edges hemmed for safety
Vol.: 7 liters
Size: H440, W220, D296 (mm)
Packing: 1pc/ctn.,0.4cuft.



SN-7114-30 Vol. 30liters

SN-7114 -40 Vol. 40 liters

Hi-tech Super-sensitive Trash Can

Material: # 304 Polished Stainless Steel.
Powered by 4" D" Size batteries
Packing: 1set/ctn., 2.3cuft (30ltr)
Packing: 1set/ctn., 3.4cuft (40ltr)






Waste Receptacle




SN-9545 Satin Finish

Free Standing Waste receptacle
Materials: # 304 S/S Satin finished.
Size: H953, W457, D457 (mm)
Vol.: 13 ga.

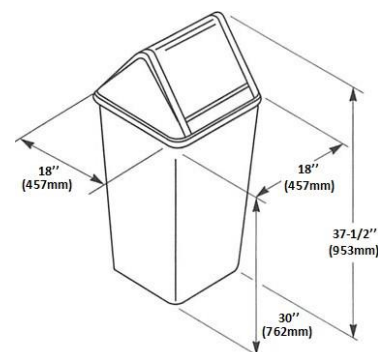


SN-47225 Satin Finish

Free Standing Waste receptacle
Fabricated of #22 gauge stainless steel
With a # 304 satin finished with a
Swing top cover.
Size : 355mm x 952mm x 355mm
Vol.: 25 ga.




SN-47025 Satin Finish

Free Standing Waste receptacle
Fabricated of #22 gauge stainless steel
With a # 304 satin finished without a
Swing top cover.
Size: 355mm x 552mm x 355mm
Vol.: 25 ga.




SN-926 Small
SN-926-32 Big

Waste receptacle
Materials: # 304 S/S Satin finished.
Size: H340, W180, D450 (mm)
Packing: 1 set/ctn., 1.1 cuft.



SN-924 Small
SN-924-32 Big

Waste receptacle
Materials: # 304 S/S Satin finished.
Size: H450, W300, D180 (mm)
Packing: 1 set/ctn., 1.1 cuft.






Bathroom Accessories



SN-313S

Corner Basket


304 Stainless Steel with Chrome plated finish.
Packing: 50pcs/ctn. 2.1cuft.



SN-313L

Corner Basket


304 Stainless Steel with Chrome plated finish.
Packing: 42pcs/ctn. 4.4cuft.



SN-314

Double Corner Basket


304 Stainless Steel with Chrome plated finish.
Packing: 12pcs/ctn. 5.6cuft.



SN-312S

Basket


304 Stainless Steel with Chrome plated finish.
Packing: 50pcs/ctn. 1.2cuft.



SN-312M

Basket


304 Stainless Steel with Chrome plated finish.
Packing: 60pcs/ctn. 2.3cuft.



SN-312L


Basket

304 Stainless Steel with Chrome plated finish.
Packing: 24pcs/ctn. 2.4cuft.






Bathroom Accessories



SN-275

Facial Tissue Dispenser


Wall mounted
304 Polished Stainless Steel.
Vol.: 300 single-ply or 150 double-ply
Packing: 24pcs/ctn. 4.5cuft.



SN-275R

Facial Tissue Dispenser


Recessed
Face plate fabricated of # 304 Polished stainless steel with heavy gauge galvanized steel cabinet.
Packing: 24pcs/ctn. 4.5cuft



SN-317RSB

Recessed Soap Dish with bar


304 Polished stainless steel
Aluminum roller
Removable PS tray to retain Soap
Wall opening: H140mm, W140mm, D51mm
Packing: 50pcs/ctn. 4.0.cuft.



SN-529


Magnifying & Plane Glass

Shaving Mirror
Chromed plated brass
Adjustable mirror direction
Extension: 12inches (300mm)
Packing: 10pcs/ctn. 2.0cuft



SN-304 Zinc die-casting SN-304S Stainless steel

Toothbrush & Tumbler
Chromed polished finish.
Packing: 50pcs/ctn.0.8cuft.

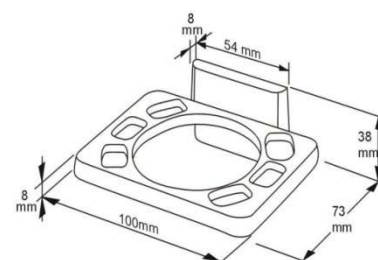




Bathroom Accessories




SN-770 Satin finish
SN-770B Polished finish
SN-770W Cold rolled steel
 w/ white powder coated.

½ Fold Toilet Seat Cover Dispensers
 Dispenses: 250 seat covers
 # 304 Stainless Steel
 Packing: 10pcs/ctn. 2.cuft.




SN-880 Surface mounted
SN-880R Recessed

½ Fold Recessed Toilet Seat Cover Dispenser
 # 304 Satin Stainless Steel
 Vol.: 500 single paper toilet seat covers
 Wall opening : W400, D67, H286 (mm)
 Packing: AE-880 : 6pcs/ctn. 3.2 cuft.
 AE-880R: 6pcs/ctn. 3cuft




SN-660 Satin finish
SN-660B Polished finish
SN-660W Cold rolled steel
 w/ white powder coated.

¼ Fold Toilet Seat Cover Dispenser
 # 304 Stainless Steel
 With lock & key
 Packing: 10pcs/ctn. 2.cuft.




SN-326S

with drain holes
 # 304 Polished stainless steel
 Packing: 72pcs/ctn. 2.0cuft.



SN-1027

Wall mounted Cigarette Ashtray
 # 304 Polished stainless steel
 Packing: 72pcs/ctn. 1.7cuft.






Bathroom Accessories




SN-316S

Soap Dish with drain holes
304 Polished stainless steel
Packing: 100pcs/ctn. 2.7cuft.




SN-306

Soap Dish with drain
Chrome plated zinc die-casting.
Packing: 100pcs/ctn. 1.8cuft.




SN-426A

Toilet Brush & Dispenser
304 Polished Stainless Steel
Chrome plated steel bar.
Plastic brush & under bar
Packing: 12pcs/ctn. 1.9cuft.



SN-200

Towel Ring
304 Polished stainless steel
Packing: 48pcs/ctn. 3.5cuft.




SN-295

Bottle Opener
304 Polished stainless steel
Packing: 100pcs/ctn. 0.6cuft.



SN-290

Retractable Clothes Line
304 Polished S/S casing & knob
retainer plate 2600mm nylon cord with
Chrome plated ABS knob. Chrome
plated brass center locking nut.
Packing: 60pcs/ctn. 1.4cuft.






Bathroom Accessories



SN-220

Square Towel Bar



304 Polished stainless steel
Bar length : 18"
Packing: 35pcs/ctn. 3.2cuft.

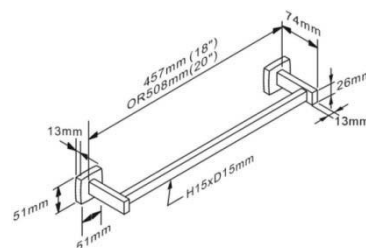

SN-221

Round Towel Bar



304 Polished stainless steel.
Bar length : 18"
Packing: 25pcs/ctn. 1.7cuft.

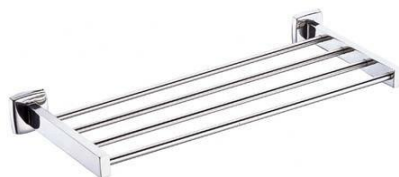

SN-225TS

Towel Shelf


304 Polished stainless steel
Packing: 25pcs/ctn. 1.7cuft.

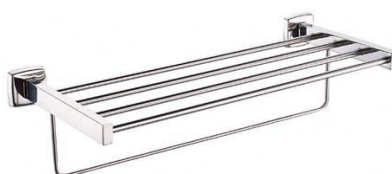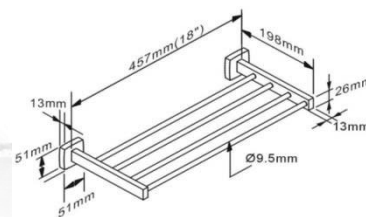

SN-226

Towel Shelf with drying rod


304 Polished Stainless Steel
Packing: 25pcs/ctn. 3.2cuft.

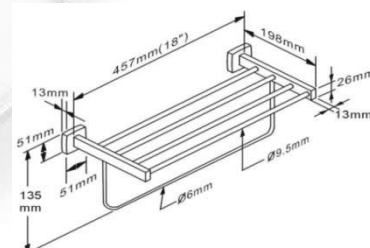

SN-502SS

Towel Shelf with Bar


304 Polished stainless steel
Packing: 12pcs/ctn. 3.4cuft.

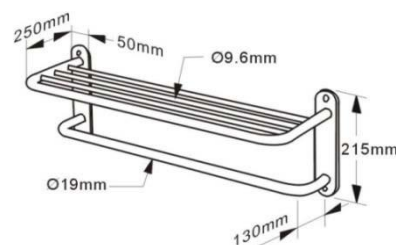

SN-501SS

Towel Shelf

304 Polished stainless steel.
Packing: 12pcs/ctn. 3cuft.






Bathroom Accessories



SN-227

Shelf


304 Polished stainless steel
Packing: 25pcs/ctn. 3.4cuft.

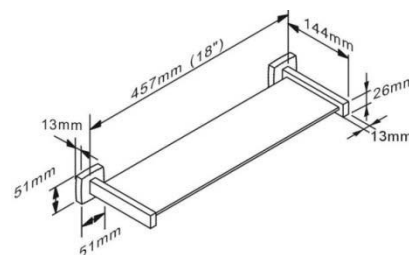

SN-500SS

Towel Bar


304 Polished stainless steel
Bar length: 24"
Packing: 50pcs/ctn. 1.5cuft.



SN-231

Square Towel Bar with soap dish


304 Polished stainless steel.
Bar length: 18"
Packing: 25pcs/ctn. 3.5cuft.

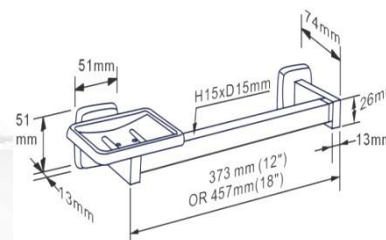

SN04-111-711N

Towel Shelf in U-shape style


304 Polished Stainless Steel
Packing: 6pcs/ctn. 3cuft.

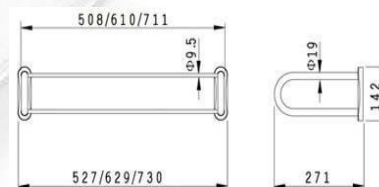

SN-113-711N

Towel Shelf in H-style with hook


304 Polished Stainless Steel
Packing: 6pcs/ctn. 3cuft.

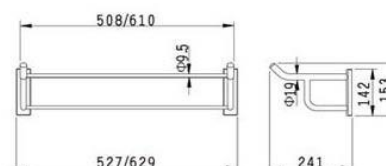

SN03-103-711N

Towel Shelf in R-style

304 Polished stainless steel
Packing: 6pcs/ctn. 3cuft.

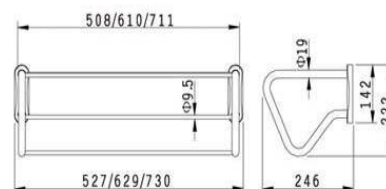

Bathroom Accessories



SN-2425 Satin finish

Rounded Wall Urns Ashtray

Wall mounted
304 stainless steel with polished finish.
Aluminum mounting bracket and receptacle.
Flip top ashtray hinges to urn for vandal proof installation.
Entire unit has Satin finish.
Dimension: 9-1/4" .8-1/4" .9-5/8" (235x210x245mm).



SN-1095 Satin finish

Ashtray Receptacle


Wall mounted
304 Stainless steel polished finish.
Ash receptacle mounts to the wall.
Push button drops debris into the liner. Liner included.
Dimensions: 4" x 3-3/4", with a 4-3/4" diameter. (100x95x120mm).



SN-2814 Satin finish

Removable Ash Receptacle

Wall mounted
304 stainless steel with polished finish.
Theft resistant flip tray.
Removable ash receptacle
Dimensions: 11" .5-1/2". 6" (280x140x150mm).

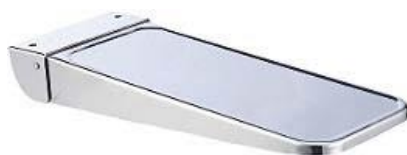

SN-1095 Satin finish

Folding Utility Shelf

For Toilet compartments. Wall mounted
304 satin finish stainless steel with raised rim.
Returns to upright position when not in use.
Dimensions: 14-9/16".5-29/32"(370x150mm)



SN-4710 Satin finish

Shelf & Double Toilet Paper Holder with Ashtray

304 stainless steel with Satin finish.
Capacity: Two standard toilet tissue roll.
Dimensions: 18-1/2".4". 5"(470x100x125mm)

Grab Bars & Configurations



GRAB BAR (SN-GB-12 / 18 / 24 / 30 / 36 / 42 / 48)

Specifications: 1-1/4", ϕ 1-1/2"

Length: 12, 18, 24, 30, 36, 42 or 48 (inch)

Material: # 304 stainless steel or
W-cold rolled stainless steel with
White powder coated.

Material: # 304 stainless steel x T1.2mm (ϕ 1-1/4", ϕ 1-1/2")

Leg: Inside holder # 304, 2.5 x ϕ 73 (mm)

Cover: # 304, 0.8 x ϕ 76 (mm), snap onflange.

Minimum: 120pcs for each size.

Contracture: Pipe into holder then use argon solder to fix
whole piece use steel screw and anchor bolt to fix on wall

Surface: BS- polished stainless or SS- satin stainless steel finish



GB- Series

Horizontal or Vertical Grab bar




304 Peened Stainless Steel

With three mounting holes

Diameter: 1-1/4". Satin finish.

Available size: 12", 16", 18", 24", 30",
32", 42", and 48" lengths.




GB -1212V


304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish

GB - 2424V

304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish.

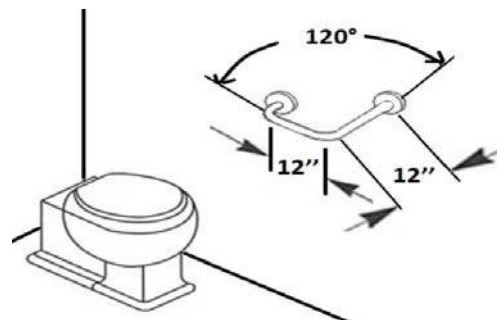

Grab Bars & Configurations

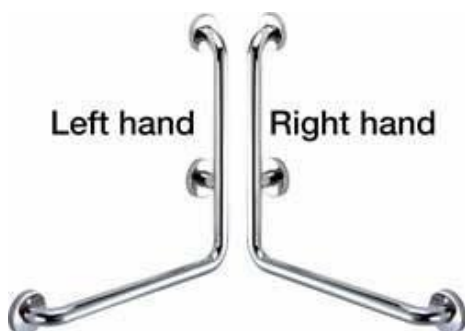


GB – R1624 Right Handed

304 Satin Stainless Steel.
Diameter: 1-1/4"

GB – L1624 Left Handed

304 Satin Stainless Steel.
Diameter: 1-1/4"

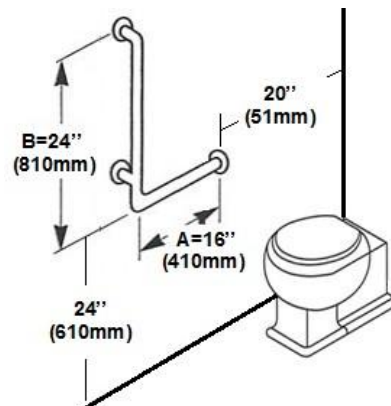


GB – R1632 Right Handed

304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish.


GB – L1632 Left Handed

304 Satin Stainless Steel.
Diameter: 1-1/4"

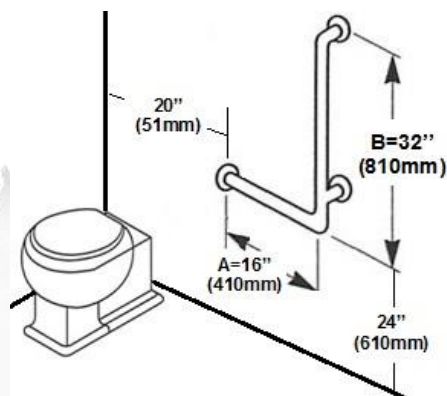

GB – 3620

304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish.




GB – R3033 Right Handed


304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish.

GB – L3033 Left Handed


304 Peened Stainless Steel.
Diameter: 1-1/4". Satin finish.

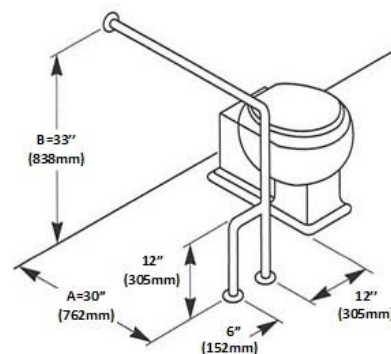


Grab Bars & Configurations

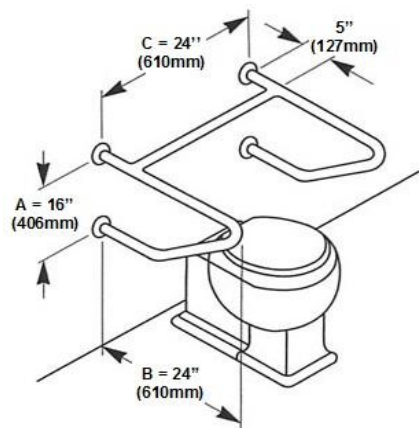


GB-2424V

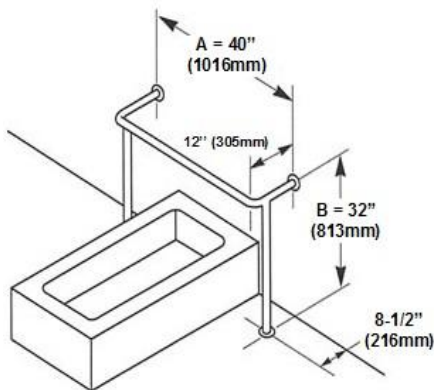


GB- 4032H

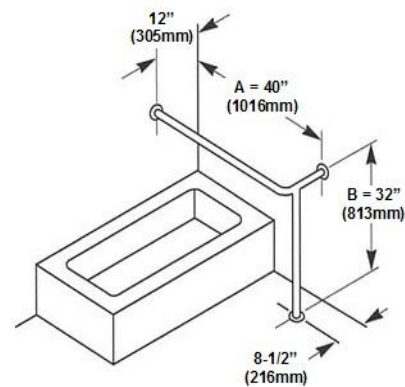


GB - 4032LS

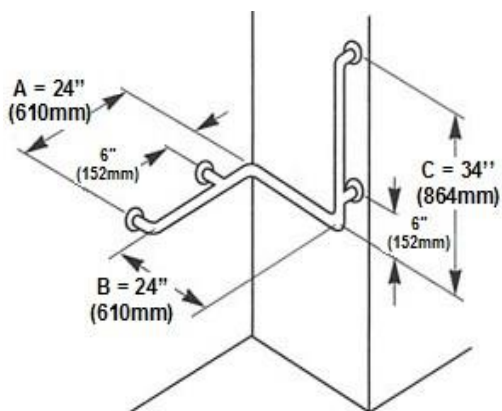

GB- 3424Z

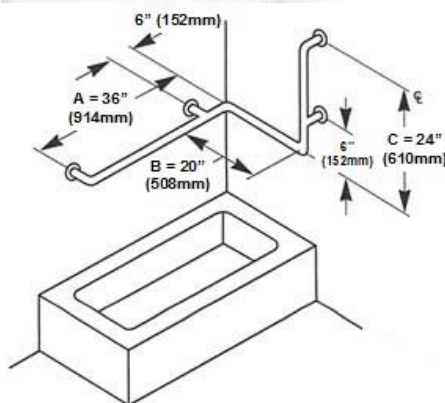


GB-3624S

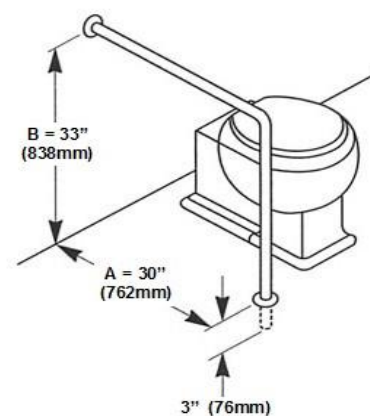


GB -3330S



GB-2822H

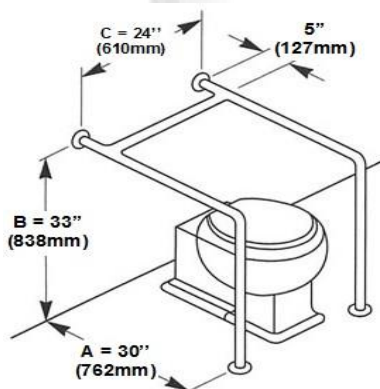


GB- 3024L

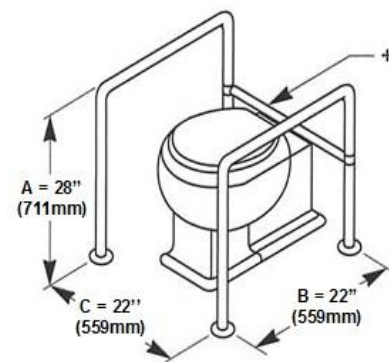


GB -2228U


Grab Bars & Configurations

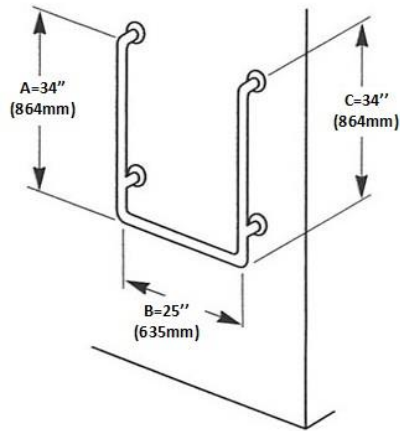


GB- 3425U

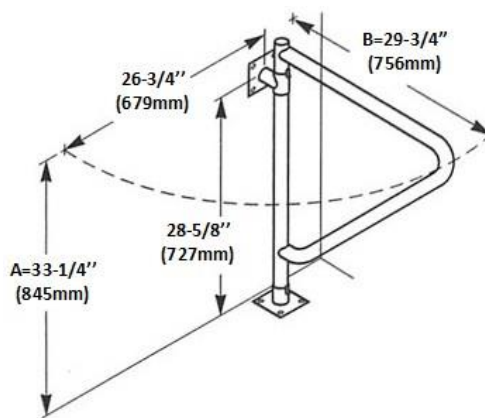


GB-3329V

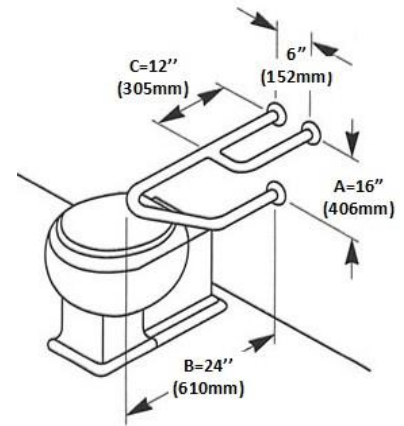


GB - 1624RV

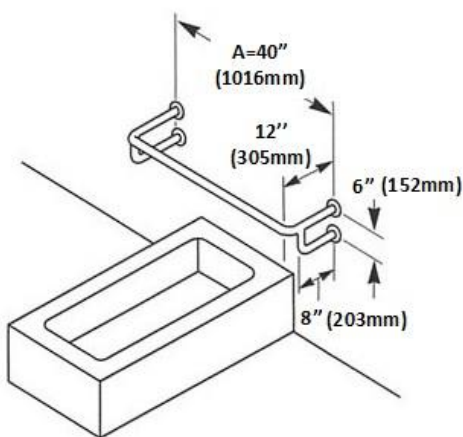


GB- 4012H

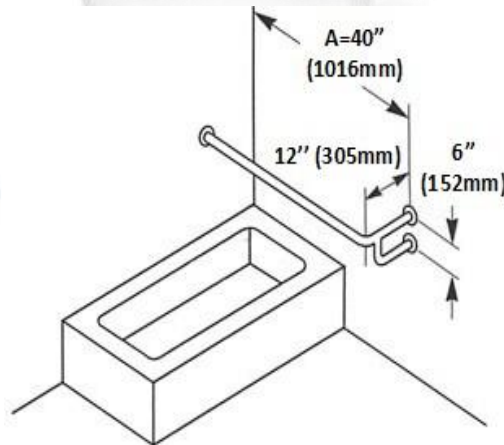


GB- 4012HR

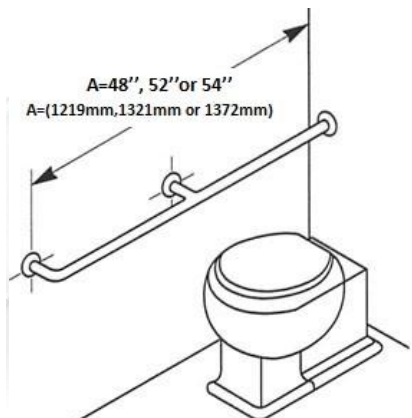


GB - 482L

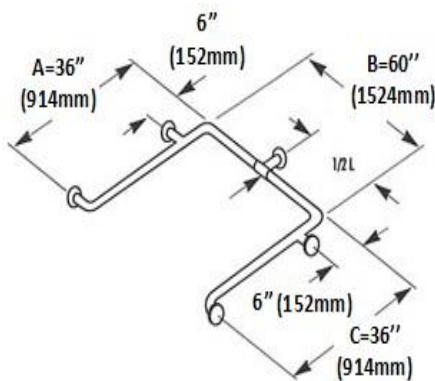

GB- 3660U

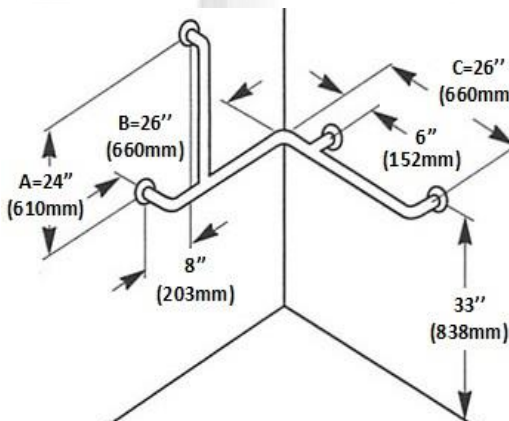


GB- 2626Z

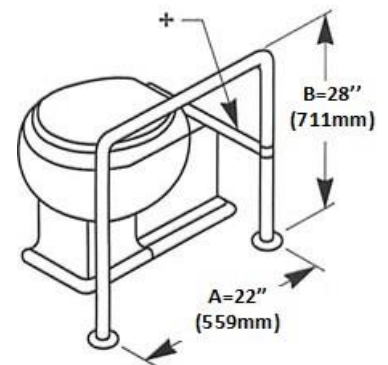

GB - 2822RU

Disabled Grab Bar

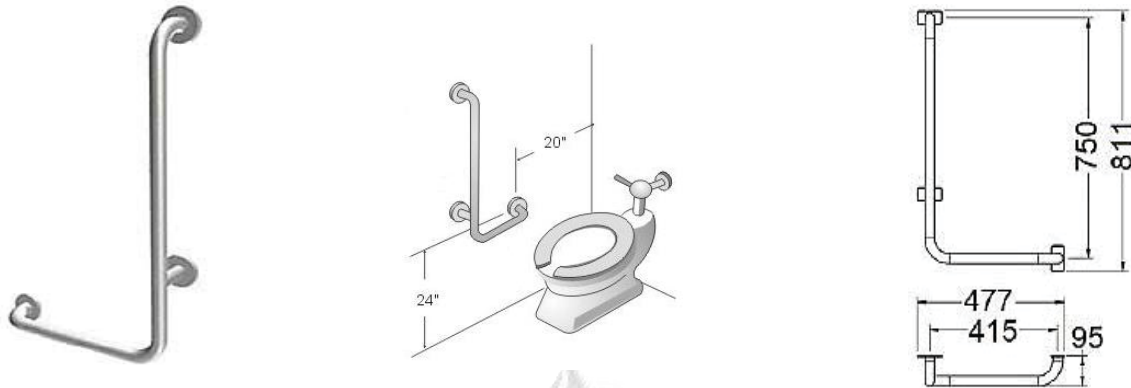

SN-GB-L1632

Specifications

Materials: # 304 Peened Stainless Steel
Diameter: 1-1/4". Satin finish
Special order Grab Bars, Stainless Steel
Code R1003SP 16x24":1-1/4" dia. Stainless steel, peened finish
Code L1003SP 16x24":1-1/4" dia. Stainless steel, peened finish
Code R1003NP 16x24":1-1/2" dia. Stainless steel, peened finish
Code L1003NP 16x24":1-1/2" dia. Stainless steel, peened finish

The Frost SP and NP series stock grab bars are of an all stainless steel construction. The brushed and peened finish make this an attractive, cost effective product to specify for any installation.

Stamped flange is 12 gauge stainless steel with a full 360 degree bead weld to the 18 gauge stainless steel tubing. Features concealed mounting detailing as shown in the illustration above.

Barrier Free Access:

The Frost SP grab bar series comply with handicap codes requiring 1-1/4" bar diameter and wall clearance of 1-1/2".

Barrier free access specifications may vary depending on jurisdiction.

NP style grab bars have 1-1/2" bar diameter and wall clearance of 1-1/2".

Description and specifications applicable on date issued. We reserve the right to make improvements or changes without notice.

R1003 16x24 L1003 16x24

Safety Warning:


All grab bars must be installed by qualified trades persons. Installers must consult and comply with local building codes. Mounting hardware and other systems to be determined by contractor and installer pending specific structure, design, and conditions. All installations must be fully inspected and approved by property owners and maintenance personnel prior to product being put into use. Failure to comply to proper installation procedure will void warranty and may result in malfunctioning or injury.



Flip up / Swing safety rail Grab Bars


FGB-3011S Satinfinish
FGB-3011SW White powder coated

#304 Peened Stainless Steel, heavy duty.
 Diameter of Tube: 32mm (1-1/4" OD).
 Mounting Plate: 4" x 12" (102x305mm).
 Length: 30" x 11" (762x279mm).

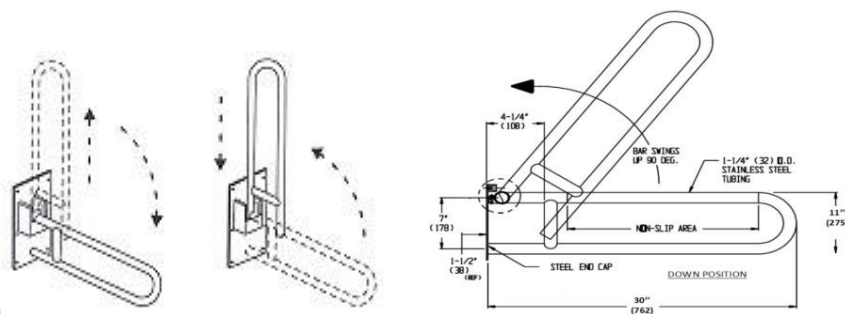


FGB-296 Satin finish

Type heavy duty # 304 Peened Stainless Steel with # 18 ga. Diameter of Tube: 32mm (1-1/4" OD).
 All bends formed by automatic mandrel bending process which maintains a uniform bar diameter around bends.
 Length: (29" x 6") (737x152mm)

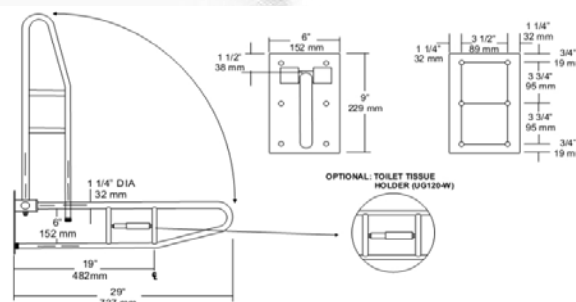

FGB-6016 Satin finish

Heavy duty # 304 stainless steel with satin finish with 18 ga. (1.2mm) wall thickness and 1-1/4" (32mm) outside diameter. Back plate shall be 3/16" (5mm) thick stainless steel, equipped with screw holes for attachment to wall. Swing-up grab bar shall be manually raised for approach or departure and lowered to horizontal position for support counterweighted design shall prevent grab bar from falling back down to the full horizontal position once grab bar is raised to the full upright (vertical) position.

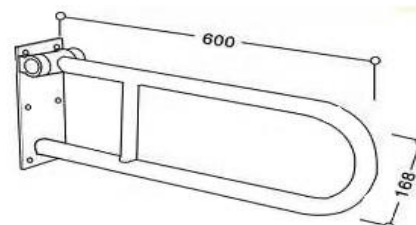




Coat Hooks



SN-301

Single Robe Hook.


Chrome plated, zinc die-casting.
Packing : 200pcs/ctn. 1.3cuft.



SN-302

Double Robe Hook.


Chrome plated, zinc die-casting.
Packing : 200pcs/ctn. 1.3cuft.



SN-401

Single Robe Hook.


304 Polished Stainless Steel.
Packing : 150pcs/ctn. 1.3cuft.



SN-402

Double Robe Hook.


304 Polished Stainless Steel
Packing : 150pcs/ctn. 2.2cuft.

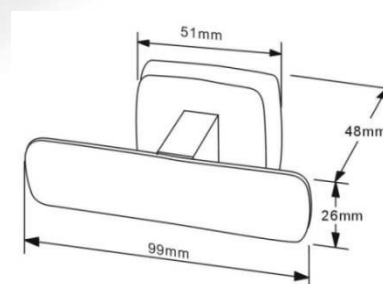

SN-408

Double Robe Hook.

304 Polished Stainless Steel
Packing : 150pcs/ctn. 1.2cuft.





Coat Hooks




SN-409

Hat & Coat Hook.

304 Polished Stainless Steel.

Packing : 100pcs/ctn. 2.9cuft




SN-303 SN-303S

Zinc die-casting
Stainless Steel

Single Robe Hook with bumper

Chrome plated finish

Packing : 200pcs/ctn. 1.3cuft.




SN22-701

Double Robe Hook.

304 Polished Stainless Steel.

Packing : 150pcs/ctn. 1.3cuft.

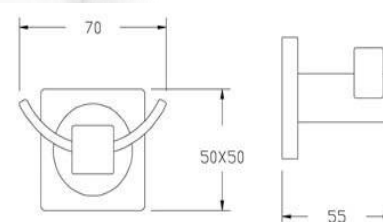


SN- CH-1S

Single Safety Coat Hook

304 Satin Stainless Steel

Packing : 150pcs/ctn. 1.3cuft.






Coat Hooks



SN-CH-3S

Safety Coat Hook
With 3 hooks
304 Satin Stainless Steel

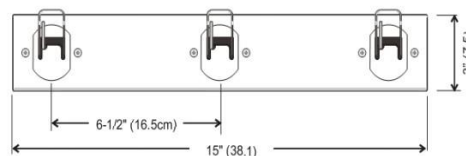

SN-SUS304

Robe Hook, Stainless Steel Round Coat Hook

Specifications

Materials: Stainless steel 304

Finish: Satin finish

Key Features:




- Made of 100% SUS304 stainless steel, durable and rustproof, outstanding quality ensures years of reliability and durability
- COMFORTABLE LOOK, gentle stainless-steel finish combines with the sleek lines and warm brushed nickel, non-glare and scratch resistance, easy to clean. Offers a easeful and neat style in your bathroom, bedroom, toilet and kitchen, appropriates with other plumbing fixtures perfectly.
- NEAT CIRCULAR APPEARANCE, smooth round base is parallel to larger hook, makes an amazing decorative touch that adds visual interest to our bathroom. Our classic robe hook fits various style of modern household.
Net weight: 0.24 lb. (110g).
- SECURITY & FUNCTIONAL HOLDER, larger hook on the end of edge maximizes the holder length and thickened design are more stronger to keeps item from falling. Safely hangs robe, towel, coat, or other more large stuff.

Shower Seat & Basin




SN-SS842

Wall mounted Shower Seat
With HPL Phenolic top
304 Stainless Steel.
Size: 490x370mm.

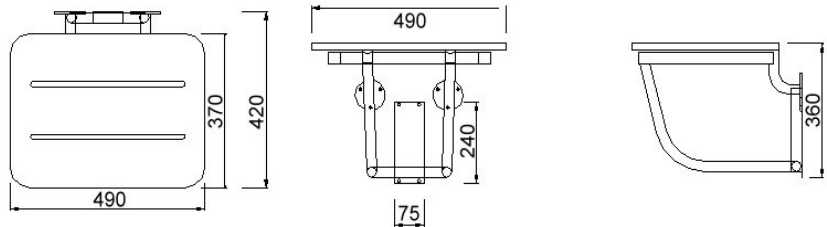

SN-SS845

Wall mounted Shower Seat
With HPL Phenolic top
304 Stainless Steel. Size. : 32"x 21"

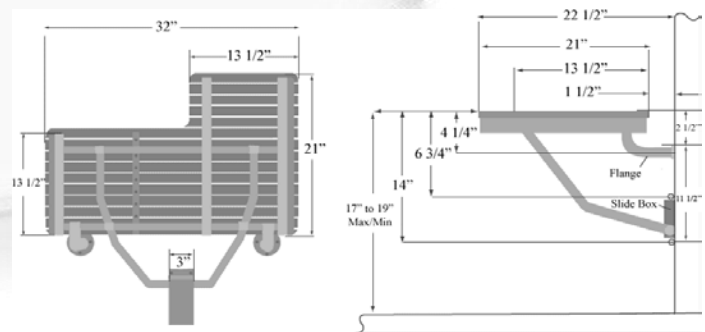

SN- SW848

Wooden Shower Seat
Surface mounted
Wooden brown finish top.
304 Stainless Steel.
Size: 15" x 12"



Stainless Steel Basin




SN-7140

WASH BASIN

Wall mounted.

304 polished stainless steel Chrome-plated brass for water pipe, tumbler holder & soap dish holder.

360mm diameter basin with auto push-up strainer assembly.

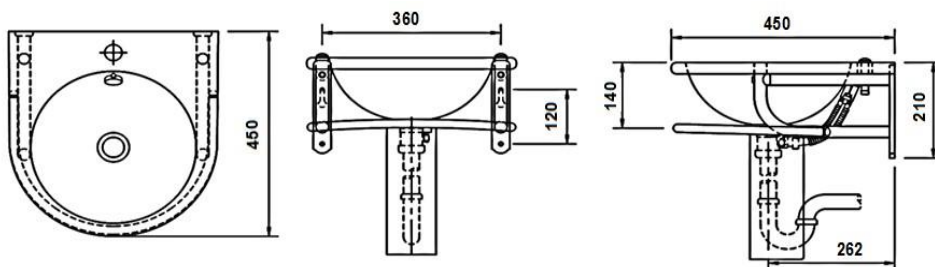

SN-9012 Baby Changing Station

Surface mounted

Constructed of high-density polyethylene.

Has 250 lbs. load capacity.


Child protection: concave changing surface and safety strap.

Easy open/close pneumatic mechanism and oversize hinge and safety stop system.

Weight: 18 lbs.

Weight: 250 lbs.

Unit size: 35" (889mm) W x 22¼" (565.15mm) H.

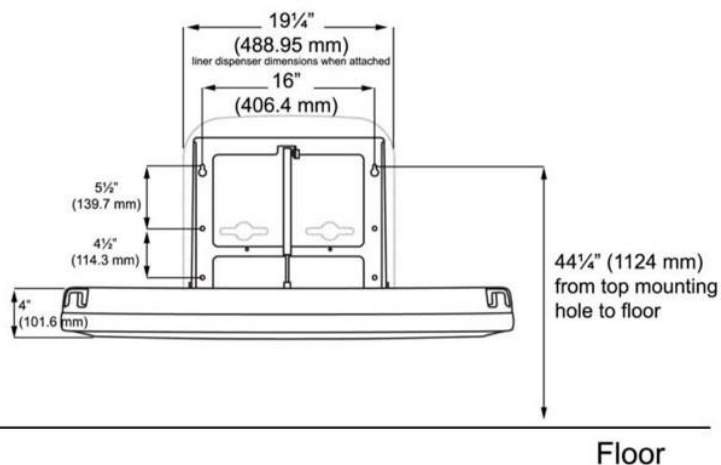

BABY CHANGING STATION



SN-J8002A

Baby changing station recessed type.

- Horizontal model
- Hinge system design
- Equipped with tissue box or storage boxes
- Equipped with adjustable safety belt
- Material: stainless shell + plastic inside (HDPE)
- Maximum load : 20 kg
- Open: 940*495*585mm
- Closed: 940*585*104mm
- Hole dimension :L905mm *H530*D92mm



SN-J8002B

Wall Mounted Baby Changing station:

- Horizontal model
- Hinge system design
- Equipped with tissue box or storage boxes
- Equipped with adjustable safety belt
- Material: stainless shell + plastic inside (HDPE)
- Maximum load : 20 kg
- Open: 905*495*520mm
- Closed: 905*520*104mm



Vandal Resistance Mirror




MSF: 18x24

Vandal resistance mirror

With # 304 stainless steel frame.
One piece 24 ga., stainless steel
Channel frame provides rigid assembly.
Comes in bright annealed finish. Vandal
resistant concealed three way.4mm glass
with shock resistant primary back.
Full galvanized back panel.

Available Sizes: **16x24, 18x24, 18x30,
24x24, 24x30 to 24x36.**

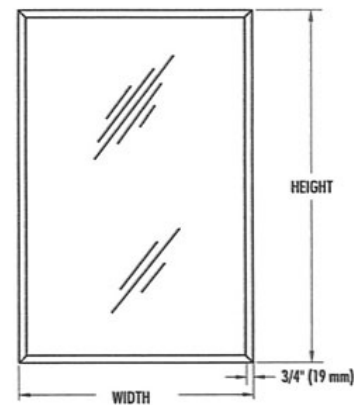


MSFAT: 18x24

Fixed Tilt Angle Frame Mirror

304 of satin finished stainless steel
Frame 3/4" x 3/4" with welded and
Polished corners.1/4" thick glass.
Theft-resistant mounting bracket.
Standard or barrier-free applications.

Available Sizes: **16x24, 18x24, 18x30,
24x24, 24x30 to 24x36**

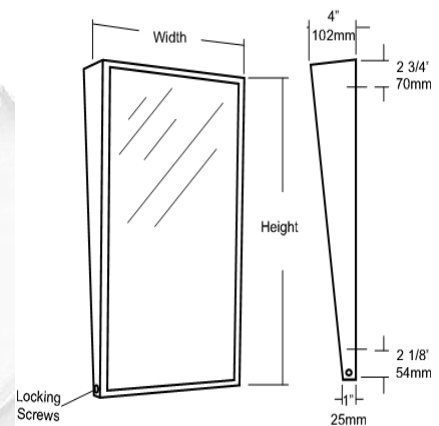


MSATA: 18x24

Adjustable Tilt Angle Frame Mirror

304 of satin finished stainless steel
Frame 3/4" x 3/4" with welded and
Polished corners.1/4" thick glass.
with mitered corners. Frame is secured
at one corner with a stainless steel rivet.
Mirror 1/4" thick type 1 transparent
flat type, class 1 - clear glass mirrors
and coated with silver and sealed with
a uniform electrolytic copper plating.

Available Sizes: **16x24, 18x24, 18x30,
24x24, 24x30 to 24x36.**

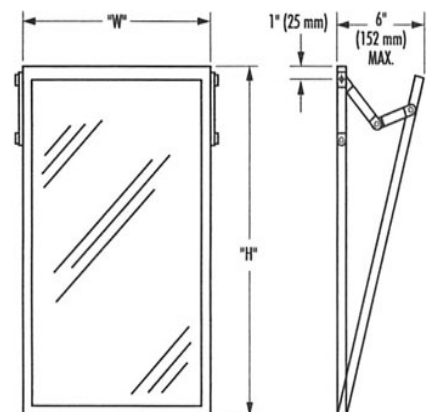

Medicine Cabinet



SN-MC1730


Medicine Cabinet

Surface mounted

Medicine cabinet, # 304 stainless steel polished finish.

Mirror door has full-length stainless steel piano-hinge, magnetic catch and cable door stop. Four adjustable stainless steel shelves.

Dimension: 435mm W x 778mm H x 102mm D.

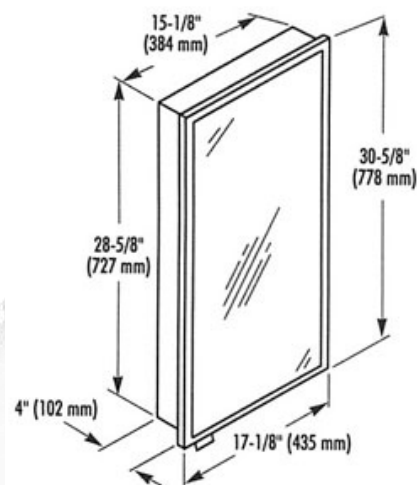


SN-MS0605

Mirror with Shelf

Surface mounted


Includes shelf of 18 gauge # 304 stainless steel with Polished finish and all edges returned and hemmed for maximum rigidity and safety. Shelf is welded to face frame.

Dimension: 70cm W x 130cm H x 4cm projection.

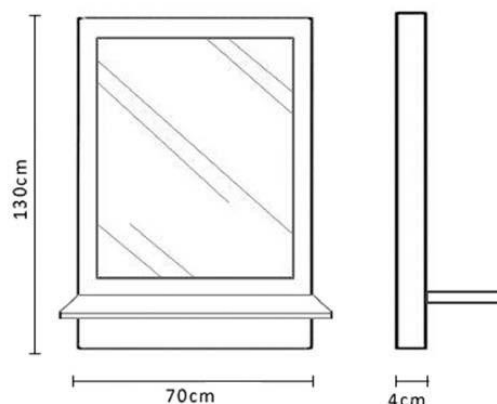

Automatic Hand Dryer


SN-1800PA

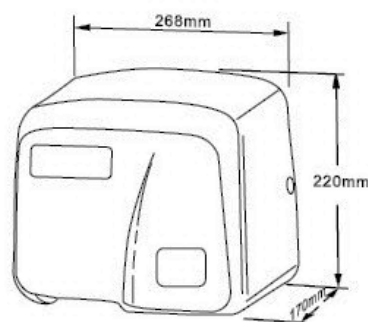

- Casing: Plastic
- Material : Plastic
- Operation Power : 1800w
- Casing : made of high grade retardant ABS 3.0mmthick
- Brushless motor: 80w, 2850 R.P.M (50Hz), 3400 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 70 degree C (158 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m3/h (171cm)-60Hz, 255m3/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 55 +/-3db
- Approximately 30-35 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1512-1800w, Amps :13.8-15A
- Volts : 220-240Vac, Watts : 1512-1800w, Amps :6.9-7.5A
- Housing Dimensions: 268mm (W) x 220mm (H) x 170mm (D). 10-35/64" (W) x 8-21/32" (H) x 6-11/16"(D).
- Weight: 3.8kg (8.4 lbs.) unpacked: 4.5 kg (9.9 lbs.) packed.



SN-1800EA


- Casing: Painted cast aluminum
- Material : Aluminum
- Operation Power : 1800w
- Brushless motor: 100w, R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 70 degree C (139 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m3/h (171cm)-60Hz, 255m3/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/-3db
- Approximately 30-35 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1512-1800w, Amps :13.8-15A
- Volts : 220-240Vac, Watts : 1512-1800w, Amps :6.9-7.5A
- Housing Dimensions: 248mm (W) x 220mm (H) x 170mm (D). 9-3/4" (W) x 8-3/4" (H) x 6-3/4"(D).
- Weight: 5.4kg (11.9 lbs.) unpacked: 5.8 kg (12.8 lbs.) packed.

Automatic Hand Dryer

SN-1800SA

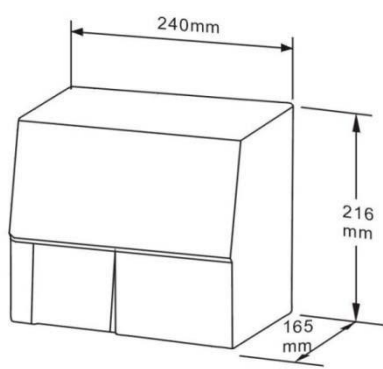


- Casing: Stainless Steel
- Material : Stainless Steel
- Operation Power : 1800w
- Casing: Stainless Steel Satin finished (# 304 1.2mm thick).
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 70 degree C (158 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m3/h (171cm)-60Hz, 255m3/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/- 3db (For Brushless Motor)
- Approximately 30-35 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal – proof lock screws and key wrench.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1512-1800w, Amps :13.8-15A
- Volts : 220-240Vac, Watts : 1512-1800w, Amps :6.9-7.5A
- Housing Dimensions: 240mm (W) x 216mm (H) x 165mm (D). 9-3/8" (W) x 8-1/2" (H) x 6-1/2"(D).
- Weight: 5.8kg (12.8 lbs.) unpacked: 6.1kg (13.4 lbs.) packed.

SN-1800SRA




- Casing: Stainless Steel
- Material : Stainless Steel
- Operation Power : 1800w
- Casing: Stainless Steel Satin finished (# 304 1.2mm thick).
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m3/h (171cm)-60Hz, 255m3/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/- 3db (For Brushless Motor)
- Approximately 30-35 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal – proof lock screws and key wrench.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1512-1800w, Amps :13.8-15A
- Volts : 220-240Vac, Watts : 1512-1800w, Amps :6.9-7.5A
- Housing Dimensions: 240mm (W) x 216mm (H) x 165mm (D). 9-3/8" (W) x 8-1/2" (H) x 6-1/2"(D).

Automatic Hand Dryer

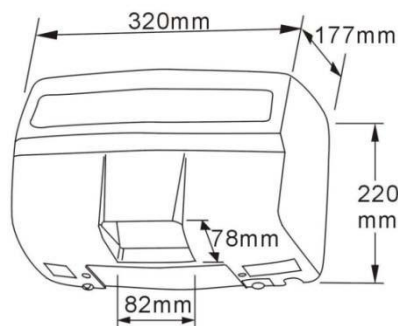


SN-2200EA

- Casing: White Painted Cast Aluminum
- Material : Aluminum
- Operation Power : 2200w
- Automatic operation hand dryer.
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m³/h (171cm)-60Hz, 255m³/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/- 3db (for brushless motor)
- Approximately 30-35 seconds drying time. (for brushless motor)
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1848-2200w, Amps :16.8-18.3A
- Volts : 220-240Vac, Watts : 1848-2200w, Amps : 8.4.-9.15A
- Housing Dimensions: 320mm (W) x 220mm (H) x 175mm (D). 12-19/32" (W) x 8-21/32" (H) x 6-57/64"(D).
- Weight: 6.1kg (13.4 lbs.) unpacked: 6.4 kg (14.1 lbs.) packed.

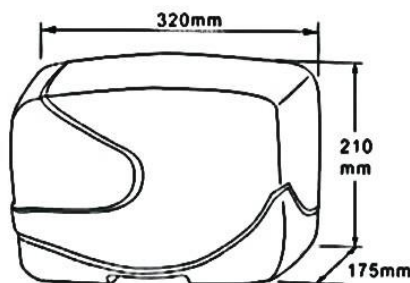


SN-2200LA

- Casing: White Painted Cast Aluminum
- Material : Aluminum
- Operation Power : 2200w
- Automatic operation hand dryer.
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m³/h (171cm)-60Hz, 255m³/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/-3db
- Approximately 30-35 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1848-2200w, Amps :16.8-18.3A
- Volts : 220-240Vac, Watts : 1848-2200w, Amps : 8.4.-9.15A
- Housing Dimensions: 320mm (W) x 220mm (H) x 175mm (D). 12-19/32" (W) x 8-21/32" (H) x 6-57/ 64"(D).
- Weight: 6.1kg (13.4 lbs.) unpacked: 6.4 kg (14.1 lbs.) packed.

Automatic Hand Dryer

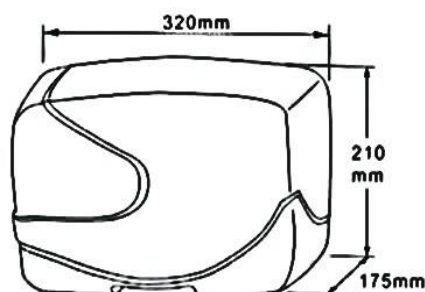


SN-2200RA

- Casing: Bright Chrome
- Material : Aluminum
- Operation Power : 2200w
- Automatic operation hand dryer.
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 139 degree C (282 degree F) Thermal cut-off.
- Dryer shall deliver 291m³/h (171cm)-60Hz, 255m³/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/- 3db (for brushless motor)
- Approximately 30-35 seconds drying time. (for brushless motor)
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1848-2200w, Amps :16.8-18.3A
- Volts : 220-240Vac, Watts : 1848-2200w, Amps : 8.4.-9.15A
- Housing Dimensions: 284mm (W) x 248mm (H) x 202mm (D). 11-3/16" (W) x 9-3/4" (H) x 8"(D).
- Weight: 6.1kg (13.4 lbs.) unpacked: 6.4 kg (14.1 lbs.) packed.

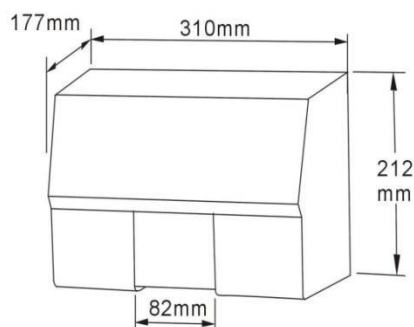

SN-2200SA


- Casing: Stainless Steel. Satin Finished (# 304, 1.2mmthick)
- Material : Stainless Steel
- Operation Power : 2200w
- Automatic operation hand dryer.
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 141 degree C (286 degree F) Thermal cut-off.
- Dryer shall deliver 291m³/h (171cm)-60Hz, 255m³/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 64 +/- 3db(for brushless motor)
- Approximately 20-25 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- Drip proof : IPX1

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1848-2200w, Amps :16.8-18.3A
- Volts : 220-240Vac, Watts : 1848-2200w, Amps : 8.4.-9.15A
- Housing Dimensions: 320mm (W) x 220mm (H) x 175mm (D). 12-19/32" (W) x 8-21/32" (H) x 6-57/64"(D).
- Weight: 6.1kg (13.4 lbs.) unpacked: 6.4 kg (14.1 lbs.) packed.

Automatic Hand Dryer

SN-2200SRA

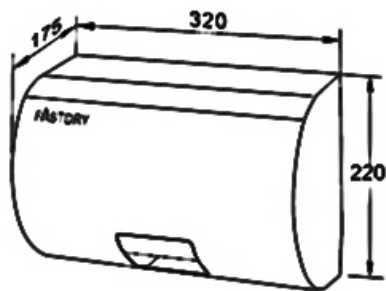


- Casing: Stainless Steel
- Material : Stainless Steel
- Operation Power : 2200w
- Automatic operation hand dryer.
- Brushless motor: 100w, 2850 R.P.M (50Hz), 3250 R.P.M(60Hz)
- Motor: Designed with 105 degree C (221 degree F) thermostat.
- Heater assembly: Designed with 87 degree C (189 degree F). Thermostat and designed with 141 degree C (323 degree F) Thermal cut-off.
- Dryer shall deliver 291m³/h (171cm)-60Hz, 255m³/h(150cm)-50hz
- Air speed: 16.5m/s -60Hz, 14.5m/s-50hz.
- Sound level : 63 +/- 3db (for brushless motor)
- Approximately 30-35 seconds drying time. (for brushless motor)
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 1848-2200w, Amps :16.8-18.3A
- Volts : 220-240Vac, Watts : 1848-2200w, Amps : 8.4.-9.15A
- Housing Dimensions: 284mm (W) x 248mm (H) x 202mm(D). 11-3/16" (W) x 9-3/4" (H) x 8"(D).
- Weight: 6.1kg (13.4 lbs.) unpacked: 6.4 kg (14.1 lbs.) packed.

SN-2400PA

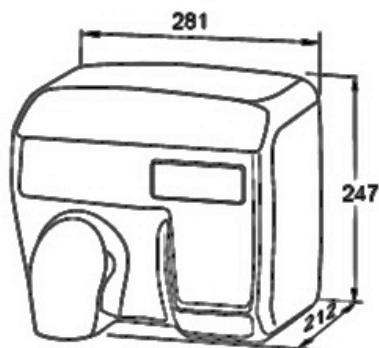


- Casing: Porcelain Enameled Coating
- Material : Steel
- Operation Power : 2400w
- Automatic operation hand dryer.
- Heater assembly: Brush motor: 200w, 5500 R.P.M Designed with 105 degree C (221 degree F)thermostat.
- Air speed : 28m/s (62.6mi/h)
- Dryer shall deliver : 345 m³/h (202CFM)
- Sound level : 70 +/-3db
- Approximately 20-25 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- Drip proof : IPX1
- Nozzle and push -button in chrome plated zinc
- Designed with 65 degree C (149 degree F) thermostat.

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 2.0 – 2.4 kw, Amps :18.3-20A
- Volts : 220-240Vac, Watts : 2.0 – 2.4 kw, Amps :9.15 -10A
- Housing Dimensions: 281mm (W) x 247mm (H) x 212mm (D). 11-3/32" (W) x 9-49/64" (H) x 7-61/64"(D).
- Weight: 7.0kg unpacked:7.5kg packed.

Automatic Hand Dryer




SN-2400CA

- Casing: Satin Chrome
- Material : Steel
- Operation Power : 2400w
- Automatic operation hand dryer.
- Brush motor: 200w, 5500R.P.M
- Heater assembly: Designed with 105 degree C (221 degree F) thermostat.
- Designed with 65 degree C (149 degree F) thermostat
- Dryer shall deliver 345m³/h (202 CRM)
- Air speed:28m/s (62.6mi/h).
- Sound level : 73 +/-3db
- Approximately 20-25 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- Drip proof : IPX1
- Nozzle in chrome plated zinc

Specifications & Dimensions:

- Volts: 110-120Vac, Watts: 2.0 – 2.4 kw. Amps : 18.3 -20A
- Volts: 220-240Vac, Watts: 2.0 – 2.4 kw. Amps : 9.15 -10A
- Housing Dimensions: 284mm (W) x 248mm (H) x 202mm (D).
11-3/32" (W) x 9-49/64" (H) x 7-61/64"(D).
- Weight: 7.0kg unpacked;7.5 kg packed.




SN-2400SA

- Casing: Stainless Steel
- Material : Stainless Steel
- Operation Power : 2400w
- Automatic operation hand dryer.
- Brush motor: 200w, 5500R.P.M
- Heater assembly: Designed with 105 degree C (221 degree F) thermostat.
- Designed with 65 degree C (149 degree F) thermostat.
- Air speed : 28m/s (62.6mi/h)
- Dryer shall deliver : 345 m³/h (202CFM)
- Sound level : 73 +/-3db
- Approximately 20-25 seconds drying time.
- Adjustable sensitive distance of sensor from 10 to30cm
- Power cut off automatically in case of irregular use over 60seconds.
- 2 vandal-proof lock screws and key wrench.
- proof :IPX1
- Nozzle and push –button in chrome plated zinc

Specifications & Dimensions:

- Volts : 110-120Vac, Watts : 2.0 – 2.4 kw, Amps : 18.3 -20A
- Volts : 220-240Vac, Watts : 2.0 – 2.4 kw, Amps : 9.15 -10A
- Housing Dimensions: 292mm (W) x 256mm (H) x 210mm (D).
11-1/2" (W) x 10-5/64" (H) x 8-17/64"(D).
- Weight: 6.0kg (13.2 lbs.) unpacked;6.4kg (14.1 lbs.) packed.

Automatic Hand Dryer




SN-JA (SR)

- Casing : Stainless Steel
- Material : Stainless Steel
- Operation Power : 1600W
- Motor Type: Brush Type, Dual Ball Bearings; 350-700W, 12000-18000 R.P.M. Adjustable
- We use High Brightness LED to Increase the Ease and Delight of Use
- Drying Time: Less than 10-15 seconds
- Drip Proof: IP X1; Isolation: Class1
- Warm Air Speed Output: 75-100 m/s (169-225 mi/hr), Adjustable
- Heater Element: 450-900W, Adjustable
- N.W.: 11.6 kg (25.6 lbs.); G.W.: 13.2ks (29.2lbs.)
- Unit Size: 250mmW x 513mm H x 179mmD
- Rough Wall Opening: 235 mm W x 495 mm H x 123 mm D

Specifications & Dimensions:

- Operating Voltage: 110-120 Vac, 50/60Hz, 1.3-1.6 KW; 220-240 Vac, 50/60Hz, 1.3-1.6 KW.
- Circuit Operation: Infrared Automatic, self-adjusting
- Sensor Range: 51 mm to 330 mm [2" to 13"], adjustable.
- Motor Thermal Protection: Auto Resetting Thermostat turns unit off at 105 degree C { 221 degree F }.
- Motor Overload Protection: Motor Assembly Designed with over current fuse, replaceable.
- Heater Thermal Protection: Auto Resetting Thermostat turns unit off at 85 degree C (185 degree F); Thermal fuse cut unit off at 142 degree C {288 degree F}.
- Timing Protection: 60 seconds auto shutoff



SN- Eco Fast (SM)

- Casing: Stainless Steel
- Material : Stainless Steel
- Operation Power : 1000W
- Lowest power consumer in Eco Dryer market!
- NEW Eco Fast_ Surface Mounted Type High Speed Hand Dryer
- Super-fast drying time: Less than 15 seconds; Air speed reaches 90m/s
- Simply designed and easily maintained
- Patented air-flow mechanism for free flow of air
- Infrared Automatic, self-adjusting.

Specifications & Dimensions:

- Operating Voltage: 110-120V, 50/60Hz, 0.84-1.0kW
- 220-240Vac, 50/60Hz, 0.84-1.0kW
- Warm Air Speed Output: 90 m/s [201.3 mi/h]
- Dryer delivers: 101.7 m3/h, (59.8CFM)
- Motor Type: 11/16HP, 500W, 29000 R.P.M Brush Type: Dual Ball Bearings
- Motor Thermal Protection: Auto-resetting Thermostat turns unit off at 105 degree C [221 degree F]
- Air Output Temperature: 55 degree C [131 degree F] (Ambient Temp. 25 degree C [77 Degree F])
- Heater Element: 500W
- Sound Level: 75 +/- 1 dB at 1m
- Sensor Range: 51mm~254mm(2"~10")
- Isolation: CLASS1
- Unit Size: 259 mm W x 376 mm H x 85 mm D

Automatic Hand Dryer




SN-JA01

- Casing : Porcelain Enameled Coating
- Material : Steel
- High Brightness LED to Increase the Ease and Delight of Use
- Power : 1600 W(Adjustable)
- Drying Time: Less than 10-15 seconds
- Drip Proof: IP X1; Isolation: Class1
- Motor Type: 350-700W, 12000-18000 R.P.M, Adjustable; Brush Type, Dual Ball Bearings
- Warm Air Speed Output: 75-100 m/s (169-225 mi/hr.),Adjustable
- Heater Element: 450-900W,Adjustable
- N.W.: 5.8 kg (12.8 lbs.); G.W.: 6.6ks (14.6lbs.)
- Unit Size: 205mmW x 287mm H x 180mm D [8-5/64" x 11-19/64" x7-3/32"].

Specifications & Dimensions:

- Operating Voltage: 110-120 Vac, 50/60Hz, 1.3-1.6KW.
- Circuit Operation: Infrared Automatic, self-adjusting.
- Sensor Range: 51 mm to 330 mm [2" to 13"], adjustable; standard 180 mm +/- 20 mm [7"].
- Motor Thermal Protection: Auto Resetting Thermostat turns unit off at 105 degree C {221 degree F}.
- Heater Thermal Protection- Auto Resetting Thermostat turns unit off at 85 degree C (185 degree F).
- Thermal cut-off 142 degree C (288 degree F)

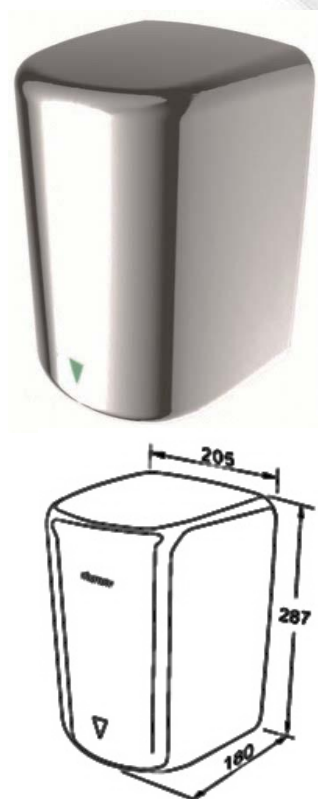

SN-JA04 Bright Finish

SN-JA05 Stainless Steel Satin finish.

- Casing : Stainless Steel cover (T:1.5mm)
- Material : Bright finished
- High Brightness LED to Increase the Ease and Delight of Use
- Operation Power : 1600 W (Adjustable)
- Drying Time: Less than 10-15 seconds
- Drip Proof: IP X1; Isolation: Class1
- Motor Type: 350-700W, 12000-18000 R.P.M, Adjustable; Brush Type, Dual Ball Bearings
- Warm Air Speed Output: 75-100 m/s (169-225 mi/hr.),Adjustable
- Heater Element: 450-900W,Adjustable
- N.W.: 5.8 kg (12.8 lbs.); G.W.: 6.6ks (14.6lbs.)
- Unit Size: 205mmW x 287mm H x 180mm D [8-5/64" x 11-19/64" x7-3/32"].

Specifications & Dimensions:

- Operating Voltage: 110-120 Vac, 50/60Hz, 1.3-1.6KW.
- Circuit Operation: Infrared Automatic, self-adjusting.
- Sensor Range: 51 mm to 330 mm [2" to 13"], adjustable; standard 180 mm +/- 20 mm [7"].
- Motor Thermal Protection: Auto Resetting Thermostat turns unit off at 105 degree C {221 degree F}.
- Heater Thermal Protection- Auto Resetting Thermostat turns unit off at 85 degree C (185 degree F).
- Thermal cut-off 142 degree C (288 degree F)

Automatic Hand Dryer




SN-2200SA (DP)

- Casing : Stainless Steel
- Material : Stainless Steel
- Operation Power : 2200W
- LCD Monitor : 7" TFT-LCD panel
- Support memory card : Compact flash type I/II , Micro drive, MMC, SD, Smart Media, MS,MS-Pro
- Support file format: MP3, WMA, JPG, M-JPG, MPEG-1, MPEGII. MPEG4 (asp, simple profile)
- Drying Time : Less than 15 seconds
- Circuit Operation : Infrared Automatic, self-adjusting
- Sensor Range : Adjustable; standard 18cm +/-2cm
- Timing Protection : 2 minutes auto shutoff
- Timing Duration : 2 seconds delayed time off after last sensor read
- Cover Type : Stainless steel, 1.5mm thick Cover Finish : Satin finished / Bright finished /Chromed

Specifications & Dimensions:

- Operating Voltage : 230-240 V, 50/60Hz, 2.0-2.2 Kw (110-120Vac,1.8-2.2Kw)
- Warm Air Volume Output :314.5m3/h(185CFM)
- Warm Air Temp Output : 60 degree C at ambient T =20C
- Motor Type : 1/4HP, 4.2krpm, Brush Type, Dual Ball Bearings
- Motor Thermal Protection : Auto Resetting Thermostat turns unit off at 105 degree C (221 degree F)
- Heater Element : 2000W @ 240 V/2000W @120Vac
- Heater Thermal Protection : Auto Resetting Thermostat turns unit off at 87 degree C (189 degree F)
- Thermal fuse cuts unit off at 141 degree C (286 degree F)




SN-2200SA (R)

- Casing : Stainless Steel
- Material : Stainless Steel
- Operation Power : 2200W
- Heater Assembly:
- Designed with 87 degree C (185 degree F) thermostat
- Designed with 141 degree C (323 degree F) thermostat cut-off
- Brush Motor : 200W, 3800 R.P.M. --50Hz/60Hz.
- Designed with 105 degree C (221 degree F) thermostat

Specifications & Dimensions:

- Volts : 120 V, Watts : 2.2 kw, Amps :18.3A
- Volts: 20A230/240 V, Watts : 1.8/2.2 kw, Amps :8.4/9.2A
- Dryer shall deliver:362 m/h3 (212CFM). -- 50Hz/60Hz
- Air speed : 20.5 m/s. --50Hz/60Hz
- Sound level : 68 +/- 5dB
- Approximately 20-25 seconds drying time
- 2 vandal-proof lock screws and key wrench
- Drip proof : 1PX1
- Unpacked: 4.8 kgs.(10.56lbs)
- Dimensions: D 156mm (6") x W 341mm(13.4") x H361mm(14.2")
- Rough wall opening : 162 x 328 x349

Automatic Hand Dryer



SN-2200SA (D)

- Casing : Stainless Steel
- Material : Stainless Steel
- Operation Power : 2400W
- Picture, Music, Video, play back available
- Media format : MPEG 1 / 2 movie clips, JPEG photo , Mp3music
- Supports 2 kinds of memory card : CF card, IBM Micro-Drive
- Power-on automatic playback function
- Programmable Power saving function
- Supports playback Repeat function.
- Auto slide show or thumbnail browsing of photos or movies

Specifications & Dimensions:

- Dimensions: W 280mm (11") x L 400mm(15.7") x H202mm(7.9")
- Weight: 8kgs (17.6lbs)unpacked
- Watts:2.0-2.4kw
- Amps:9.0-10A



SN-24SCA

- Casing : Stainless Steel
- Material : Stainless Steel
- Operation Power : 2200W
- Designed with 105 degree C (221 degree F)thermostat
- Heater assembly : Designed with 85 degree C (185 degree F)thermostat
- Designed with 141 degree C (323 degree F) thermal cut-off
- Dryer shall deliver: 314.5 m3/h (185CFM).--50Hz/60Hz
- Air speed : 20 m/s (72 mi/hr.).--50Hz/60Hz
- Sound level : 70 +/- 3dB
- Approximately 20-25 seconds drying time
- Brush motor : 200W, 7500 R.P.M.--50Hz/60Hz
- Drip proof: IPX1
- Net Weight: 20.2 kg; Shipping Weight: 23.6kgs

Specifications & Dimensions:

- Dimension: W: 318.5 x H: 1660 x D: 100(mm).
- Paper Towel Dispenser, capacity : 400-600 towels depending on the type and their folding.
- Waste receptacle, capacity : 25.4L. (6.6 gal.).
- Rough wall opening : 322 x 1615 x192mm.
- Weight : 24 kgs. (52.8 lbs.) unpacked : 30.0 kgs. (66 lbs.)packed.

Automatic Hand Dryer



SN-2400 SAN

- Casing & Material : Stainless Steel
- Operation Power : 2400 W Brush motor : 200w,5500R.P.M
- Heater assembly : Designed with 105 -> C (221 -> F)thermostat
- Designed with 65 -> C (149 -> F)thermostat
- Air speed: 28m/s (62.6mi/h)
- Dryer shall deliver 345 m3/h (202CFM)
- Sound level : 73 +/- 3dB
- Approximately 20-25 seconds drying time
- Distance range for adjustable sensor: 10 to 30cm
- Power cuts off automatically in case of irregular use over 60seconds
- 2 vandal-proof lock screws and key wrench
- Drip proof : IPX1
- Nozzle : Nozzle in chrome plated zinc

Specifications & Dimensions:

- Volts: 110-120 Vac, Watts: 2.0-2.4 kw, Amps :18.3-20A
- Volts: 220-240 Vac, Watts: 2.0-2.4 kw, Amps:9.5-10A
- Housing Dimensions : 275 mm (W) x 164.85 mm (H) x 245 mm(D)




SN-Eco Mo (High speed)

- Casing & Material: Plastic
- Operation Power : 1200W
- High Brightness LED to Increase the Ease and Delight of Use
- Standby: Color Red; Active: Color Blue
- Drying Time: Less than 10-15 seconds
- Drip Proof: IP 23; Isolation: Class1
- PATENT: USA, EUROPE, CHINA,TAIWAN
- Motor Type: 1HP, 400-750W, 11000-20000 R.P.M., adjustable
- Warm Air Speed Output:65-100 m/s (140-224 mi/hr.),adjustable
- Dryer Shall Deliver: 89-124 m3/h (55-76 CFM), adjustable
- Heater Element: ON/OFF heating options. 300-450W,adjustable
- N.W.: 10.8 kg (23.8 lbs.); G.W.: 12.8ks (28.2lbs.)
- Unit Size: 322mmW x 560mm H x 185mm D [12-43/64" W x 22"H x7-9/32"D]

Specifications & Dimensions

- Operating Voltage: 110V-120Vac, 50/60 Hz, 9.2-10 A,1.0-1.2kW
- Operating Voltage: 220V-240Vac, 50/60 Hz, 9.2-10 A,1.0-1.2kW
- Circuit Operation: Infrared Automatic, self-adjusting
- Sensor Range: 12 cm +/- 1 cm[4-23/32"]
- Motor Thermal Protection: Auto resetting thermostat turns unit off, 120V at 135 Degree C (275 Degree F), 240V at 95 Degree C (221 Degree F).
- Heater Thermal Protection: Auto resetting thermostat turns unit off at 85Degree C(185 Degree F) Thermal cut off at 142 Degree C(288 Degree F)
- Heater Thermal cut off at 142 degree C (288 Degree F)
- Sound Pressure: MIN 65 dB-A to 78-A MAX@1m
- Super Filter Assembly: Carbon Filter + Antibacterial Filter+ HEPA Filter
- Adding Japanese Ag+ Ions provides an effective anti-bacterial

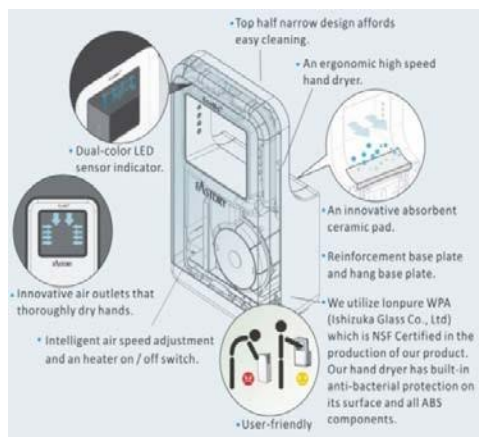

Automatic Hand Dryer



SN-HU02

Dyson Air Blade Touchless Hand Dryer

Specifications

Brand: Dyson
Model: HU02
Type: Hand Dryer V
Color: Customized

Description:

Backed with our adroit team of professionals, we are able to provide our clients with an assorted gamut of Portable Hand Dryer.

Other Information:

Suitable for smaller washrooms or tighter spaces, a hand dryer that protrudes just 10 cm from the wall. It dries hands hygienically in 12 seconds.

Recommended installation heights from floor				Minimum clearance
Male	X 52 $\frac{1}{4}$ "	Y 51 $\frac{3}{16}$ "	Z 36 $\frac{1}{8}$ "	8 $\frac{1}{16}$ " in clearance either side and 1 $\frac{3}{16}$ " in above machine.
Female	X 50 $\frac{3}{4}$ "	Y 49 $\frac{1}{16}$ "	Z 35 $\frac{1}{4}$ "	Cable entry point from floor
Child or disabled	X 42 $\frac{3}{16}$ "	Y 41 $\frac{3}{16}$ "	Z 26 $\frac{3}{16}$ "	Male 42 $\frac{3}{16}$ "
Child 5-8	X 37 $\frac{1}{2}$ "	Y 36 $\frac{7}{16}$ "	Z 22"	Female 41 $\frac{1}{2}$ "
Child 8-11	X 41 $\frac{1}{16}$ "	Y 40 $\frac{1}{2}$ "	Z 25 $\frac{1}{16}$ "	Child or disabled 33 $\frac{3}{16}$ "
Machine dimensions				Child 5-8 28 $\frac{1}{4}$ "
Height 15 $\frac{1}{2}$ " Width 9 $\frac{7}{16}$ " Depth 4"				Child 8-11 32 $\frac{3}{16}$ "

Automatic Dual Flow Hand Dryer

SN-GSQ2006B Dual Flow



- Elegant and innovative design.
- Dries hands in only 10 to 15seconds.
- It activates automatically when putting hands in the drying area.
- High speed universal brush motor.
- Suitable for medium and high traffic facilities.
- Normally goes along with soap dispenser.
- High-impact ABS bright cover, 3 mm thick.
- Housing case and water tank made of High impact 3 mm thick ABS.
- High speed motor. Universal brush motor, 30000 rpm, F class.
- It operates with two motors and without heating element.
- Automatic disconnection system after 23 seconds of continuous use.
- Micro ban antibacterial protection.
- Odorless filter system available.
- Voltage - 220-240 V.
- Frequency - 50/60Hz
- Electrical isolation - Class II
- Dimensions - 617 x 300 x195mm
- Weight – 9.55 Kg.
- Air velocity - 210Km/h.
- Total power - 1760W.
- Motor power - 880W.
- Consumption - 8A A (RPM –30000)
- Air temperature(10 cm distance / 21°C) - 40°C
- Noise level (at 2 m) - 70db.
- Protection level -IP33

SN-GSQ2006A



- Material: ABS plastic
- Power:650W
- Voltage: 220v-240v(50/60Hz)
- Air speed:95m/s
- Drying time (seconds) 5-7seconds.
- Product dimension:650mm x 292mm x250mm
- Product weight / unit (kg) 11kg.
- Packing: 1pc/ctn.
- Carton Dimension/mm 730*370*290
- The high-speed Jet strong air current removes water from the both sides of the hands with a powerful gust measuring 90 meters per second.
- Hands never need to touch the Jet so its usage is extremely sanitary. Plus, no paper waste is generated so restrooms always appear cleaner.
- Once up and running, the only cost is electric power. This makes using the Jet MUCH less expensive than using paper towel dispensers or cloth towels.
- Water blown off the hands is collected in the unit's drain tank, so the floor stays dry. Plus, paper jams and changing batteries on touch-less paper towel dispensers are no longer an issue.
- By eliminating paper waste, fewer natural resources are consumed, which reflects positively on any operator who chooses the Jet.



Automatic Faucet




SN-718A
SN-718A-CH

Non- Mixing Faucet
Mixing Faucet

Automatic Faucet

Solid brass casing with chrome plated
Battery: a lithium battery (DC6V CR-P2)
Battery service life: 2-3 years (at 50,000 uses per year)
Sensor range: 5~25cm
Water pressure: 0.5~8 kgs /cm²
Water supply diameter; PF 1/2"
Water supply: 1~80 °C temperature
Packing: 8sets/ctn. 1.5 cuft.

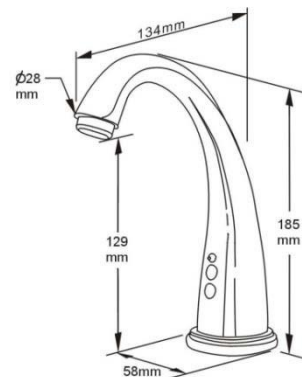


SN-818A
SN-818A-CH

Non- Mixing Faucet
Mixing Faucet

Automatic Faucet

Solid brass casing with chrome plated
Battery: a lithium battery (DC6V CR-P2)
Battery service life: 2-3 years (at 50,000 uses per year)
Sensor range: 5~25cm
Water pressure: 0.5~8 kgs/cm²
Water supply diameter; PF 1/2"
Water supply: 1~80 °C temperature
Packing: 8sets/ctn. 1.5 cuft.




SN-818R
SN-818R- CH

Non- Mixing Faucet
Mixing Faucet

Automatic Faucet Adjust- Manual Off/On

Solid brass casing with chrome plated
Battery: a lithium battery (DC6V CR-P2)
Battery service life: based on 50,000 uses per year
Sensor range: 5~25cm
Water pressure: 0.5~8 kgs/cm²
Water supply diameter; PF 1/2"
Water supply: 1~80 °C temperature
Packing: 8sets/ctn. 1.5 cuft.




SN-2603C
SN-2603C

Mode Non- Mixing Faucet
Battery Mode Mixing Faucet

Automatic Faucet

Solid brass casing with chrome plated
Battery: a lithium battery (DC6V CR-P2)
Battery service life: 300,000 on/off cycles up to 2 years
Sensor range: Factory present 20cm
Water pressure: 0.5~8 kgs/cm²
Water supply diameter; PF 1/2", 3/8", 9/16"
Water supply: 1~75 °C temperature
Packing: 6sets/ctn. 2.0 cuft.






Automatic Faucet



SN-7000 Battery Mode Non- Mixing Faucet

Automatic Faucet


Solid brass casing with chrome plated
 Battery: (4) AA Alkaline batteries
 Battery service life: 400,000 on/off cycles up to 4 years
 Sensor range: Factory present 20cm
 Water pressure: 0.5~8 kgs/cm²
 Water supply diameter; PF 1/2", 3/8", 9/16"
 Water supply: 1~75 °C temperature
 Packing: 6sets/ctn. 1.35 cuft.



SN-7700 Battery Mode Non- Mixing Faucet

Automatic Faucet


Solid brass casing with chrome plated
 Battery: a lithium battery (DC6V-CR-P2)
 Battery service life: 300,000 on/off cycles up to 2 years
 Sensor range: Factory present 20cm
 Water pressure: 0.5~8 kgs/cm²
 Water supply diameter; PF 1/2", 3/8", 9/16"
 Water supply: 1~75 °C temperature
 Packing: 6sets/ctn. 1.35 cuft.

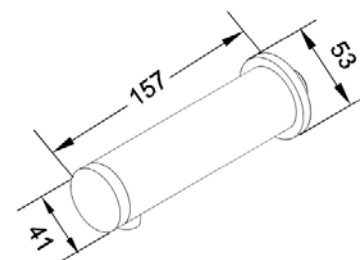

SN-210 Mixing Faucet

Automatic / Manual Faucet


Solid brass casing with chrome plated
 Battery: (4) AA Alkaline batteries
 Battery service life: 50,000 on/off
 Sensor range: 2~20cm (default 14cm)
 Response time: 0.3 sec.
 Shut-off delay time: adjustable
 Water pressure: 0.5~15 kgs/cm²
 Water supply pipe size: NPSM 1/2"-1/4"
 Water supply: 2~90 °C temperature
 Packing: 8sets/ctn. 1.5 cuft.

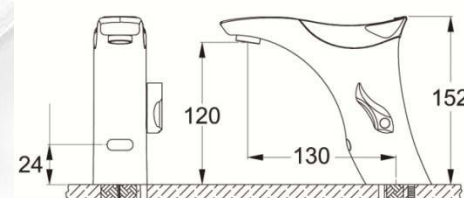

SN-510 Mixing Faucet

Automatic Faucet

Solid brass casing with chrome plated
 Battery: (4) AA Alkaline batteries
 Battery service life: 50,000 on/off
 Sensor range: 2~17cm (default 17cm)
 Response time: 0.3 sec. (default), 2 sec.
 Shut-off delay time: adjustable
 Water pressure: 0.2~15 kgs/cm²
 Water supply pipe size: NPSM 1/2"-1/4"
 Water supply: 2~90 °C temperature
 Packing: 8sets/ctn. 1.5 cuft.

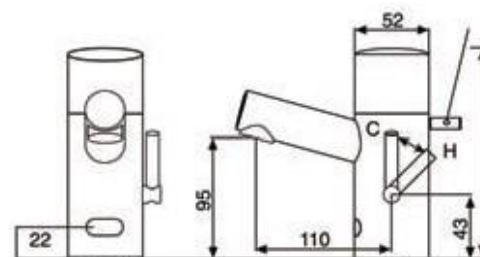




Automatic Urinal & Closet Flusher



SN-619

Automatic Urinal Flusher

- Solid brass casing with chrome plated
- Power: a lithium battery (DC6VCR-P2)
- Battery service life: 2-3 years (at 500,000 uses per year)
- Sensor range: 40cm(adjustable)
- Water supply pressure: 0.5~7kgs/cm²
- Water supply diameter; PF1/2"
- Water supply: 1~60 °C temperature
- Flushing time: Pre-use: 2 sec., Final-use: 7sec.
- Packing: 12sets/ctn. 1.1cuf.

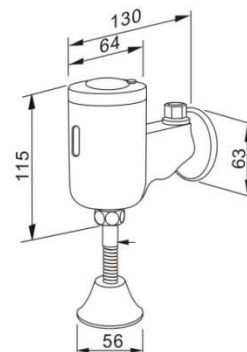


SN-629

Automatic Urinal Flusher w/ Manual Function

(No Power supply is needed)


- Solid brass casing with chrome plated
- Power: a lithium battery (DC6VCR-P2)
- Battery service life: 2-3 years (at 500,000 uses per year)
- Sensor range: 40cm(adjustable)
- Water supply pressure: 0.5~7kgs/cm²
- Water supply diameter; PF1/2"
- Water supply: 1~60 °C temperature
- Flushing time: Pre-use: 2 sec., Final-use: 7sec.
- Packing: 12sets/ctn. 1.1cuf.

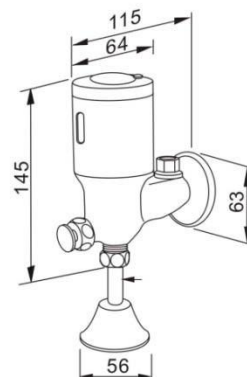

SN-719(U)

Automatic Urinal Flusher


- Solid brass casing with chrome plated
- Power: a lithium battery (DC6VCR-P2)
- Battery service life: 2-3 years (at 500,000 uses per year)
- Sensor range: adjustable
- Water supply pressure: 0.5~8kgs/cm²
- Water inlet: 3/4"
- Water outlet: 3/4"
- Flushing time: 5-13 seconds adjustable
- Packing: 12sets/ctn. 1.1cuf.



SN-719(T)

Automatic Toilet Flusher

- Solid brass casing with chrome plated
- Power: a lithium battery (DC6VCR-P2)
- Battery service life: 2-3 years (at 500,000 uses per year)
- Sensor range: adjustable
- Water supply pressure: 0.5~8kgs/cm²
- Water inlet: 1"
- Water outlet: 1-1/4" or 1-1/2"
- Flushing time: 5-13 seconds adjustable
- Packing: 6sets/ctn. 1.1cuf.



Automatic Urinal & Closet Flusher



SN-819-1 (113x113mm)

SN-819-2 (213x113mm)

- ☐ Face plate, frame and control box are all made of stainless steel for durability.
- ☐ All electronic and solenoid parts are protected sealed to resist water and moisture.
- ☐ 2- step automatic used to keep urinal bowl clean.
- ☐ When battery is low, the LED lamp will used.

Specification:

- ☐ Power: CR-P2 DC6V lithium battery 1pc(included)
- ☐ Battery service life: 2-3 years (at 500,000 uses per year)
- ☐ Sensing range: adjustable
- ☐ Operating water pressure: 0.5~8 bar (7~114 psi)
- Water supply pipe; PF1/2".
- Flushing time: Pre-use: 2 sec., Final-use: 7sec.
- Wall opening dimension : 200x100x75mm(3.9"x3.9"x3")



SN-8100-A1 AC Mode

- ☐ Power adapter, Input AC 110v~250v, Output DC 12v,0.8A/Class2

SN-8100-A1 Battery Mode

- ☐ Models; (4) AA Alkaline batteries, Service life: 400,000 on/off cycles up to 4years

Specification:

- ☐ Solid metal construction stainless steel cover plate
- ☐ Solid state, AC or battery, switchable self-diagnostic electronics
- ☐ Sensor range: Preset, adjustable, field switchable.
- ☐ Control cable : Armored, vandal resistant
- ☐ Solenoid valve: 6V DC, normally closed
- Wattage: 4 (wide), 5W (in use)
- Water pressure: 5psi to 125psi.
- Plumbing specification: supply line: 1/2", Flow rate:0.5-3.5GPF



SN-8000C-A AC Mode

- ☐ Power Adapter, Input AC 110v~250v 60Hz, Output DC 12v,0.8A/Class2.
- Plumbing specification: supply line: 1", Top Spud: 1-1/2", Flow rate:1.5-5.0GPF

SN-8000C-A AC Mode

- ☐ Power Adapter, Input AC 110v~250v 60Hz, Output DC 12v,0.8A/Class2.
- Plumbing specification: supply line: 3/4", Top Speed: 3/4", Flow rate:1.5-5.0GPF

SN-8000C-A Battery Mode

- ☐ Model: (4) AA Alkaline batteries 400,000 on/off cycles up to 4years
- Plumbing specification: supply line: 1", Top Speed: 3/4", Flow rate:1.5-5.0GPF

SN-8000C-A AC Mode

- ☐ Power Adapter, Input AC 110v~250v 60Hz, Output DC 12v,0.8A/Class2.
- Plumbing specification: supply line: 3/4", Top Speed: 3/4", Flow rate:1.5-5.0GPF.

Specification:

Standard brass/chrome plated all metal construction, standard manual mechanical override button for urinal and water closet, standard vandal resistant stop valve. Solid state, AC or battery, switchable, self-diagnostic electronics.




Foot control Unit & Sanitizer



SN-FCU726

Foot Control Unit

- Two function system\
- Step on footplate for water supply and release to stop water supply.
- Step on to turn on the water and step again to turn off the water
- Easy installed in any existing faucet to converted into Automatic foot faucet.
- When short of power, the LED will twinkle
- To remind battery replacement.
- Specification :
- Power : CR-P2 DC6V Lithium battery 1pc(included)
- Battery life: 2~3 years (at 50,000 uses per year).
- Operating water pressure: 0.5~8 bar (7~114psi).
- Sensing range: Adjustable.

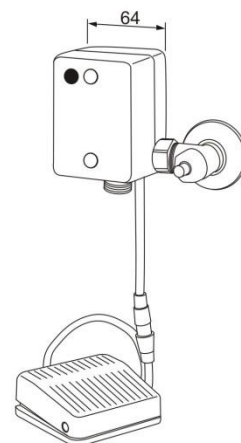

SN-620


Flush system available for urinals

SN-620D

Dripping system available for toilets and urinals

ABS Sanitizer Dispenser

Surface mounted
Vol.: 600ml
Drop: 0.4ml
Packing: 30sets/ctn., 2.8cuft

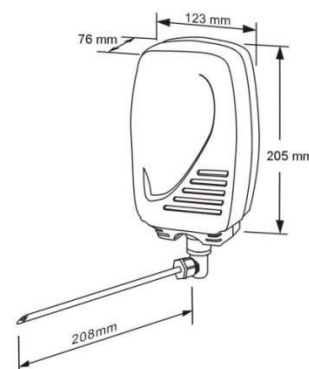

Flushing System



Dripping System






Janitorial Accessories




JAN-001

Mop Holder & Hook Strip
With 3 holders & 2 hooks
304 Satin Stainless Steel
Length: 30" (750mm)

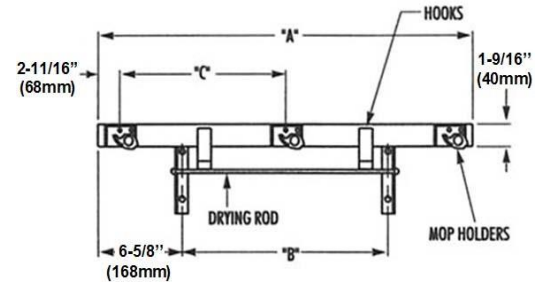


JAN-002

Long Utility Hooks
With 3 hooks
304 Satin Stainless Steel
Length: 36" (900mm)

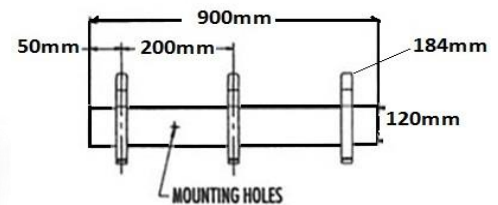


JAN-003

Mop Holder Strip & Shelf
With 3 hooks
304 Satin Stainless Steel
Length: 24" (600mm)

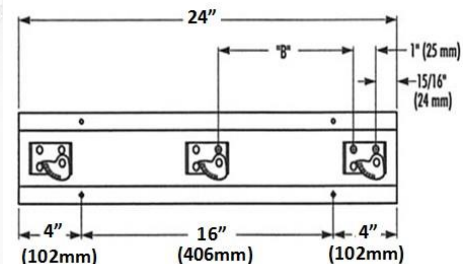


JAN-004

Mop Holder Strip
With 3 holders
304 Satin Stainless Steel
Length: 26"



JAN-005

Mop Holder & Hooks Strip
Combination Unit.
With 3 holders & 4 hooks
304 Satin Stainless Steel

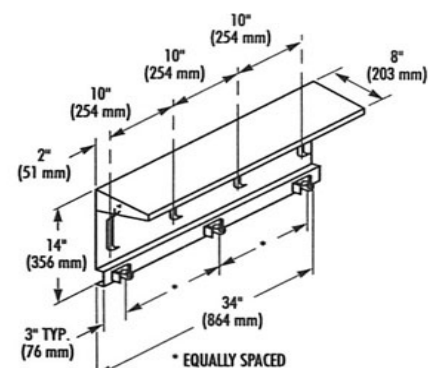



Janitorial



JAN-006

Single Coat Hook

Fabricated of #14 gauge with 304 stainless steel satin finish. Hook has two (2) exposed mounting points. Top and bottom leading edges rounded to form a radius for safety

Overall Size: 1"W x 6 11/16"H x 2 1/8"D (25mm x 170mm x 54mm)



JAN-007

Pail or Ladder Hook

Fabricated of #14 gauge stainless steel with front edge retaining lip.

Overall Size: 1 1/4"W x 6 3/4"H x 8 1/4" off wall surface (31x171x209) mm



JAN-008

Mop Holder

Plated reinforced steel with serrated cam type hard rubber mop or broom holder. Holds handles 1/2" to 1 1/4" diameter. UJ19 Mop holder can be installed by itself or used in combination with mop strips and shelving.

Overall Size: 2 9/16"W x 1 5/16"H x 1 3/16"D (65mm x 33mm x 30mm)



JAN-009

Mop Holder Strip

One piece construction fabricated of #11 ga. with #304 stainless steel satin finishes. Hook is fabricated with radius edges for safety.

Overall Size: 1 1/4"W x 2 1/8"H x 1 1/4"D (31mm x 53mm x 31mm)



JAN-010

Single Clothes Hook

Surface-mounted clothes hook. Exposed mounting.

Projects 1-1/2" from wall.



JAN-011

Single Robe Hook

Surface-mounted, single robe hook.

Exposed mounting.

Projects 1-1/8" from wall.

Janitorial

304 Stainless Steel Toilet Sign



SN-109SS-102 (Men)
SN-109SS-101 (Women)
 Size: 1850mmx1850mm



SN-109SS-104 (Wheel Chair)
 Size: 1850mmx1850mm



SN-109SS-105 (Pull)
SN-109SS-106 Push)
 Size: 1850mmx1850mm



SN-109SS-107 (No Smoking)
 Size: 1850mmx1850mm



SN-109SS-109 (Women)
 Diameter: 100mm



SN-109SS-110 (Men)
 Diameter: 100mm



SN-109SS-112 (Wheel chair)
 Diameter: 100mm



SN-109SS-115 (Pull)
 Diameter: 100mm



SN-109SS-113 (Pull)
SN-109SS-114 (Push)
 Diameter: 100mm



Correctional Facilities High Security Products



SEC-1010

Security Recessed Shower Seat

Recessed seat opens out from wall to provide sturdy bench seating. Folds up into recessed housing when not in use. Seat fabricated 16ga. of Heavy-duty# 304 stainless steel. Exterior surfaces polished finish. Hinges solid 3/8" diameter stainless steel bar. Seat supports up to 750 lbs.

Sub frame opening: 15"x15" x 2 3/4 " (380 x 380 x 70) mm.



SEC-1020

Security Framed Mirror

Surface mounted Frame 14 gauge type 304 stainless steel with satin finish, corners welded and ground smooth. Unit provided with fiberboard backing and 6 "T" nuts welded on back for rear mounting. (Specify) glazing suffix required and also specify wall thickness if greater than 6" (50 mm).

Overall Size: 12" x 16" x 5/8" (305 x 405 x 16 mm).



SEC-1030

Security Framed Mirror

Surface mounted Frame 14 gauge type 304 stainless steel with satin finish, corners welded and ground smooth. Unit provided with fiberboard backing and 6 "T" nuts welded on back for rear mounting. (Specify) glazing suffix required and also specify wall thickness if greater than 6" (50 mm).

Overall Size: 12" x 16" x 5/8" (305 x 405 x 16 mm).



SEC-1040

Security Framed Mirror with rounded corner

One piece 18 gauge type 304 stainless steel formed mirror with No. 8 mirror polish finish, integral frame, rounded corners and 6 mounting holes.

Overall Size: 12" x 16" x 1/4" (305 x 405 x 6 mm).



Correctional Facilities High Security Products



SEC-1050

Security Toilet Paper Holder

This heavy duty, vandal resistant, stainless steel toilet paper holder is a single incremental unit that cannot be removed or conceal contraband. The mounting plate is fabricated from 7 gauge stainless steel with a #4 satin finish and is welded to a 16 gauge 1" diameter tube and holds one roll of toilet paper. The unit is secured with four (4) 1/4"-20 x 1 1/4" pin in torx security machine screws



SEC-1060

Security Recessed Toilet Paper Holder

Chase-mounted, recessed, roll toilet tissue holder is one-piece, drawn # 304 stainless steel fabricated of 16ga. satin finish exterior. Glass blasted satin finish interior 4 1/2" (115mm) interior depth. Accommodates one standard toilet paper roll. Two "T" nuts welded On back for rear mounting.

Wall opening: 5 3/4" (145mm) diameter x wall thickness.
Overall size: 7 1/4" (185mm) diameter.



SEC-1070

Security Toilet Tissue Holder

Wall mounted Security toilet tissue holder is fabricated of heavy-duty, Seamless # 304 stainless steel tubing with architectural satin finish. Stainless steel end cap is welded and ground smooth. Fabricated of 18 ga. 1 1/4" (32 mm) OD. Flange is 3" (76 mm) dia. x 1/8" (3 mm) thick and has 3 countersunk holes for front mounting.

Overall size: 4 1/2" x 3 3/4" (115 x 95)mm projection.



SEC-1080

Security Recessed Toilet Paper Holder

Fabricated of 16ga. type 304 stainless steel with satin finish, exterior glass blasted satin finish interior 4 1/2" (115 mm) deep accommodates one standard toilet paper roll. Flange is 7" (180 mm) square. Hidden contraband causes roll to project from holder allowing detection. Two "T" nuts welded on back for rear mounting.

Wall Opening: 5 1/2" (140 mm) diameter x wall thickness.
Overall Size: 7" x 7" (180 x 180 mm).



Correctional Facilities High Security Products

SEC-1090



Security Grab bar

Tubing 18 gauge and flanges 1/8" (3 mm) thick type 304 stainless steel with satin finish. Closure plate is 1/8" (3 mm) thick. Dia.: 1.5"
All welded construction. Unit has 3 Threaded rods in Welded Studs on each flange. All bends are formed by an automatic mandrel bending process. All bars maintain a constant 1 1/2" offset.

Available size: 12", 18", 24", 30", 36", & 48" lengths.

SEC-1100



Security Recessed Soap Dish

Fabricated 16ga. of heavy-duty soap dish # 304 stainless steel with satin finish. One piece drawn construction with beveled trim and embossment for air circulation and drainage.

Size: 5-5/8" W x 3-5/8" H x 2-3/4" D with 5" x 7" flange.

SEC-1011



Security Single Hook bracket

Safety clothes hook. Bracket is fabricated of heavy-duty 304 stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied. Tension can be adjusted by special torx driver.

Unit measures 1" W x 4-5/8" H. Projects 3" from wall.

SEC-1012



Security Concealed Single Hook

Security towel hook back plate fabricated of heavy-duty 304 stainless steel in architectural satin finish. Safety hook of stainless steel with pivoting ball joint that releases when excessive force is applied.

Unit measures 4" W x 4" H. Projects 2-1/4" from wall.

SEC-1013



Security Exposed Single Hook

Fabricated of #14 gauge stainless steel with a #4 satin finish. All seams are Tig welded and ground smooth. Pivoting ball joint releases when excessive force is applied. (Approx. 15lbs.) Back plate has weld nuts to receive 1/4"-20 studs. (Nuts and washers not included) with four (4) exposed countersunk mounting points in lieu of concealed. (Fasteners not included)

Overall Size: 4"W x 4"H x 2 1/4"D (102mm x 102mm x 57mm)





Correctional Facilities High Security Products

SEC-1014



Security Mounting Strip with 4 hooks

Fabricated of #14 ga., with 304 stainless steel satin finish. Six (6) exposed mounting points secure unit to wall surface.

Hooks: Collapsible hooks are fabricated of stainless steel with a pivoting ball joint that will collapse when excessive weight is applied. (Approx. 35 lbs.)

Overall Size: 18"W x 5 1/2" H x 2 1/4" (Wall to hook)
457mm x 140mm x 54mm

SEC-1015



Security Mounting Strip with 4 hooks

Security clothes hook strip. Bracket is fabricated of heavy-duty type 304 stainless steel with stainless steel hook. Hook trips into down position when excessive loading is applied.

Unit measures 18" W x 5-1/2" H. Projects 3" from wall.

SEC-1016



Security Soap Dish

Soap dish fabricated of heavy-duty stainless steel in architectural satin finish. Formed from single-piece stainless steel with three drain holes.

Overall Size: 5"W x 2 1/4"H x 2 13/16"D (127mm x 57mm x 68mm)

SEC-1017



Security Towel Bar

Fabricated of #18 gauge 304 stainless steel with satin finish. Outside diameter of bar is 1" (25mm) and is heliarc welded to mounting brackets. Each bracket has two exposed mounting points (3/16" OD) for securing to wall surface.

Length: 24" Exposed mounting. Overall Size: 2"H x 3"D

SEC-1018



Security Tooth brush & Tumbler Holder

This heavy duty toothbrush and tumbler holder is ideal for heavy use, vandal-prone facilities and is designed to prevent removal and concealment of contraband. It is a one-piece unit fabricated from 11 ga., 304 stainless steel with satin finish. The toothbrush and tumbler holder accommodates a tumbler and four toothbrushes. It is surface mounted using two (2) 1/4"-20 x 1 1/4" pin in torx security machine screws, which are included.



Correctional Facilities High Security Products



SEC-1019

Security Recessed Shelf

Chase mounted, recessed shelf is fabricated of heavy-duty 304 stainless steel with exposed surfaces in satin finish. Threaded studs are provided for rear mounting to specified wall thickness.

Unit measures 16" W x 5" H x 4" D with 18" x 7" flange.



SEC-1020

Security Recessed Shelf

Security, recessed shelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All welds are ground smooth with polished corners and burr-free edges. Back of shelf has welded anchor nuts to receive threaded studs (provided).

Unit measures 16" W x 2-9/16" H. Projects 4" from wall.



SEC-1021

Security Shelf with Toothbrush

Chase mounted, security shelf with toothbrush slots. Fabricated of heavy-duty stainless steel in architectural satin finish. Four slots for toothbrushes. Threaded studs are provided for rear mounting to specified wall thickness.

Unit measures 18" W x 2-9/16" H. Projects 4" from wall.



SEC-1022

Security Book Shelf with Hooks

Security bookshelf with clothes hooks. Shelf and back plate are fabricated of heavy-duty stainless steel with architectural satin finish. Shelf interior is glass-blast satin finish. Bracket is fabricated of heavy-duty stainless steel with stainless steel hooks. Threaded studs are provided for rear mounting to specified wall thickness. Unit measures 18" W x 11" H. Projects 8" from wall.



SEC-1023

Security Book Shelf

Security bookshelf fabricated of heavy-duty stainless steel with exposed surfaces in architectural satin finish. All seams are welded and ground smooth. Shelf interior is glass-bead blast finish. Back plate on rear-mounted unit has welded anchor nuts to receive threaded studs (provided).

Unit measures 18" W x 5-1/2" H. Projects 8" from wall.



Shower Curtains & Accessories



SC-3672-01

Vinyl shower curtain. Fabricated of 6-gauge vinyl material. Hemmed edges and heat-sealed grommets on 6" centers. White is standard.

SC-3672-02

Duck shower curtain. Fabricated of 100% cotton duck material with hemmed top edges and chrome-plated nickel grommets on 6" centers.

SC-3672-03

Antimicrobial shower curtain. Fabricated of 10-oz., nylon-reinforced, antimicrobial, 8-gauge vinyl material. Flame resistant and self-deodorizing with rust-proof grommet on 6" centers. All sides hemmed.

SC-3672-04

Same as SC- 3672-03 shower curtain.

Sizes:

36" x 72"

42" x 72"

48" x 72"

72" x 72"




SCH-3672-05


Shower curtain hook.
Fabricated of 304 stainless steel spring.

SCHR- 3672-06

Shower curtain hook with rollers.
Fabricated of 304 stainless steel wire with snap fastener.

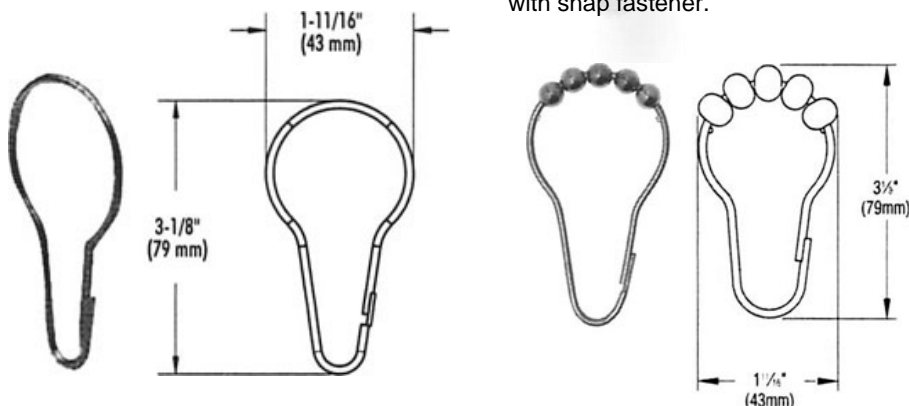


Shower Curtains & Accessories

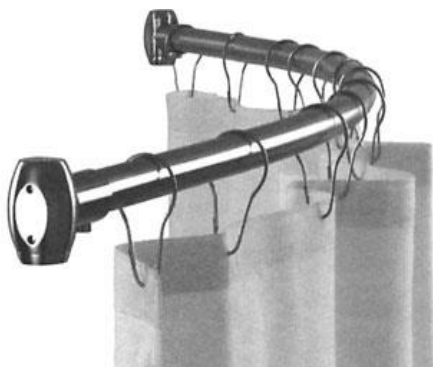


SCR-607-01 Bright Polished Finish

Shower curtain rod fabricated of stainless steel, seamless construction with exposed surfaces in architectural satin finish. Accommodates 60" shower stall increasing space in shower stall.

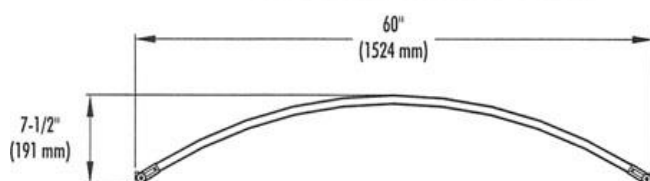

SCR- 607-02

Heavy-duty shower curtain rod with exposed mounting. Rod of 18-gauge, satin-finish, 304 stainless steel; 1-1/4" O.D. Flanges of 22-gauge, satin-finish stainless steel; 3" O.D. For lengths 72" and greater. Must specify distance from ceiling.

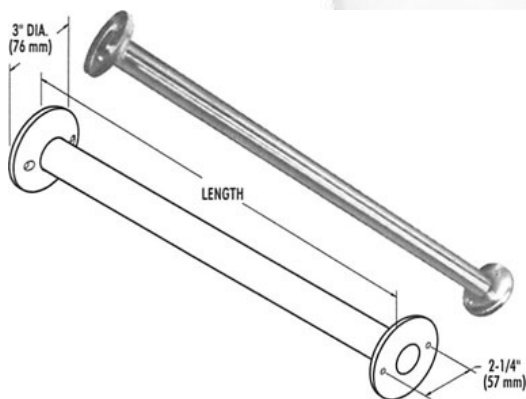

SCR- 607-03 Bright Finish

For lengths 72" and greater.
Must specify distance from ceiling.
Sizes: 36", 42", 48" and 60"

SCR- 607-04

Shower curtain rod of satin-finish 304 stainless steel; 1" O.D. For rods over 72" and L shaped.

SCR- 607-05 Bright Finish

Sizes: 36" and 60"

SCF- 607-06 Shower Curtain Flanges

2 units/ one set.


Unit size: Diameter: 71mm. Rod hole: Diameter: 25mm



SCR- 607-06

Light-duty shower curtain rod with exposed mounting. Rod of 20-gauge, chrome-plated brass; 1" O.D. Flanges of 20-gauge, chrome-plated steel.

Shower Curtains & Accessories

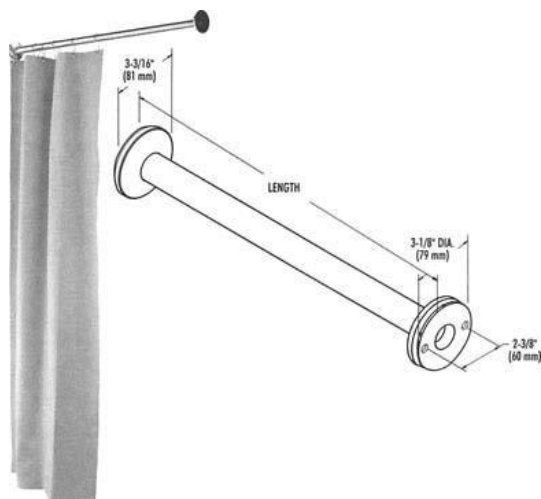

SCR-607-07

Heavy-duty shower curtain rod with concealed mounting. Fabricated of satin-finish 304 stainless steel; 1-1/4" O.D.
Flanges 3-3/16" O.D. Escutcheons snap over flanges to provide concealed mounting. For lengths 72" and greater.
Must specify distance from ceiling.

SCR-607-08 Bright Finish


For lengths 72" and greater. Must specify distance from ceiling.
Sizes: 36" and 60"

SCR-607-09

Shower curtain rod of satin-finish stainless steel; 1" O.D. For rods over 72" and L shaped.

SCR-607-10 Bright Finish

Sizes: 36" and 60"

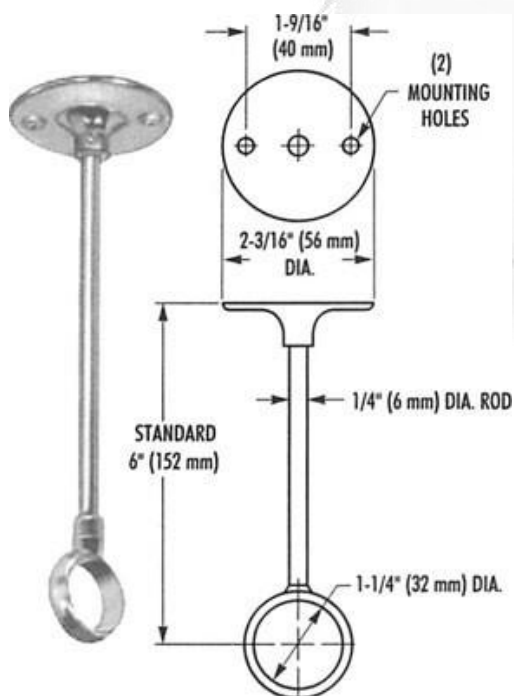

SRS-15256

Shower rod ceiling support. For 1-1/4" O.D. shower curtain rod.
Chrome-plated brass bracket, stainless steel rod and collar.
* Required for shower rod 72" and greater.
Must specify distance from ceiling.



Stainless Steel Combination Toilet



SN-T215P-M

Bathroom Portable Toilet Seat / Waterless Toilet 304

Size: 845x455x930mm

Surface finish: satin

Material: 304 or 316 stainless steel.

Thickness: upside board | bottom board | surround board | bowl | water tank (2mm)


N.W. (weight): 38 KG

G.W. (weight): 41 KG

Drainage way: P or S-trap

Widely use in public places such as airport, train, bus, night club, hospital, school, hotel, detention Centers.

Floor mounted or wall installed, simple and stable, all accessories supplied.

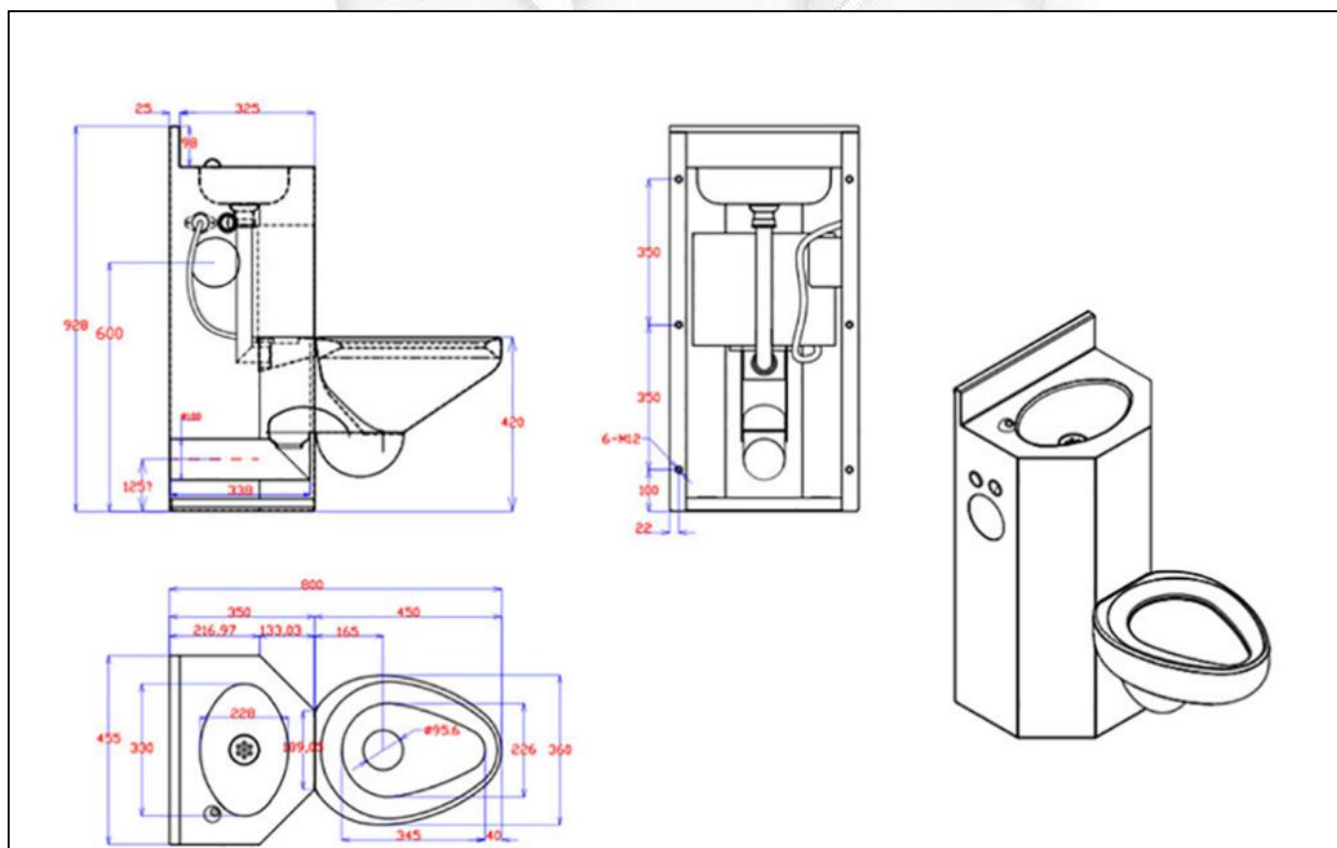



Stainless Steel Combination Toilet



SN-T215P-R/L


Stainless Steel Prison Combination Toilet

Size: 845x455x930 mm
 Surface: satin
 Material: 304 or 316 stainless steel.
 Thickness: Top | bottom board | Body | bowl | water tank (2mm)
 N.W. (weight): 38
 G.W. (weight): 41
 Drainage way: P or S-trap

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airport, train, bus, night club, Hospital, School, Hotel, Jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

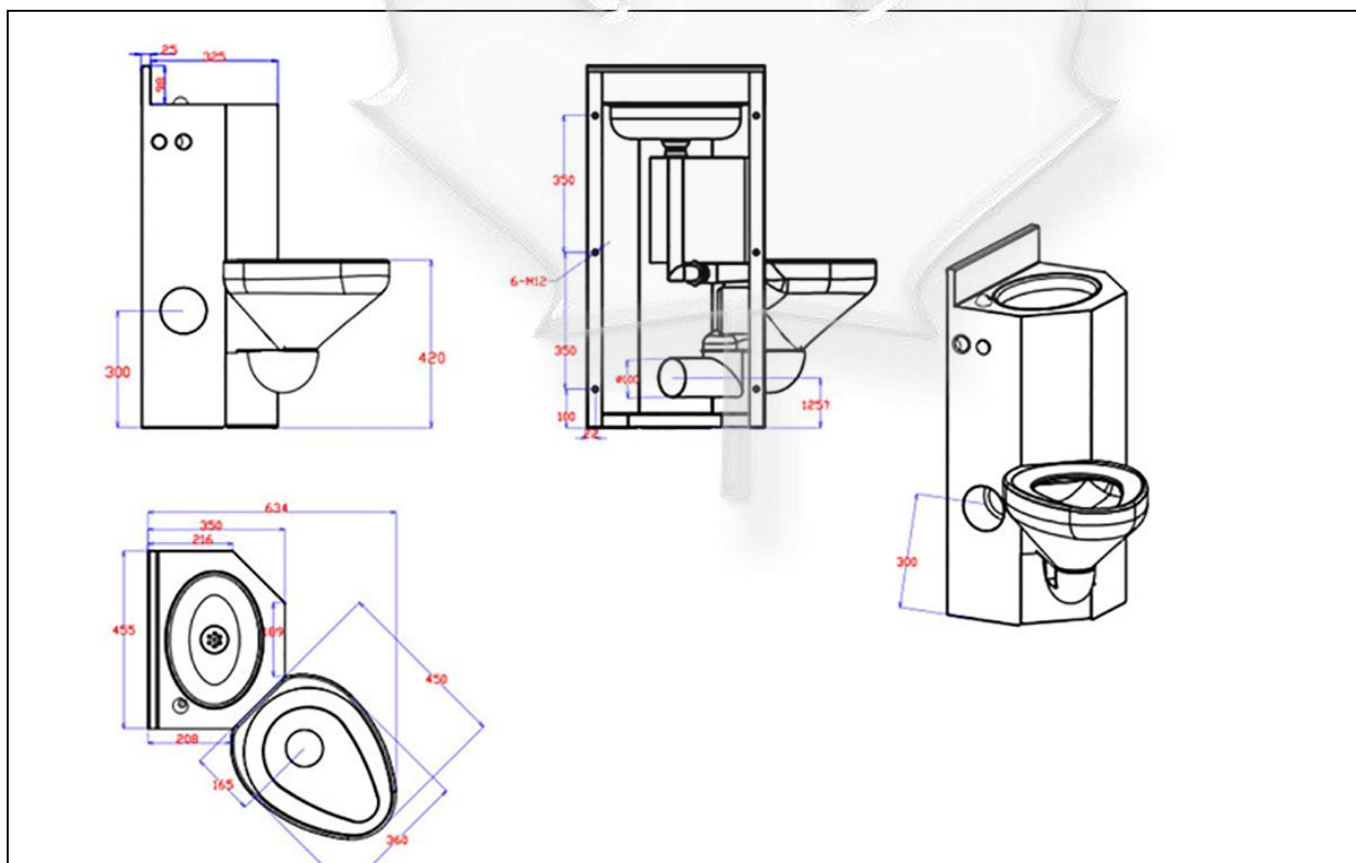



Stainless Steel Combination Toilet



SN-T209P-RL

Wall Mounted One piece Stainless Steel Comby Toilet

Size: 855 x 363 x 970

Surface: satin/mirror

Material: 304 or 316 stainless steel.

Thickness: Upside board | bottom board(2 mm),

Surround board, bowl (1.2 mm),

Wash basin (1 mm)

N.W. (weight): 33

G.W. (weight): 35

Drainage way: P or S-trap

Flush: siphon/cyclone/gravity

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.





Stainless Steel Combination Toilet



SN-T209P-M

Stainless Steel Combination Toilet with Cistern and Press Button + Nozzle

Size (mm): 855 x 363 x 970

Surface: satin

Material: 304 stainless steel.

Thickness: Upside board | bottom board (2 mm)

Surround board | bowl (1.2 mm), Wash basin (1 mm)

N.W.(weight): 33

G.W.(weight): 35

Drainage way: P or S-trap

Finish: surface can be polish finish, hair-line finish, mirror finish or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

Function: economic type, made of SS 304 or SS 316, and with anti-rust design.





Stainless Steel Combination Toilet




SN-T216P-M

304 Stainless Steel Prison Combination Toilet

Size: 845x455x980 mm
 Surface finish: satin or mirror
 Material: 304 Stainless steel.
 Thickness: Upside board | bottom board | surround board | bowl | water tank (2mm)
 N.W. (weight): 38
 G.W. (weight): 41
 Drainage way: P or S-trap
 Category: wc toilet/bathroom toilets/toilet seat

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

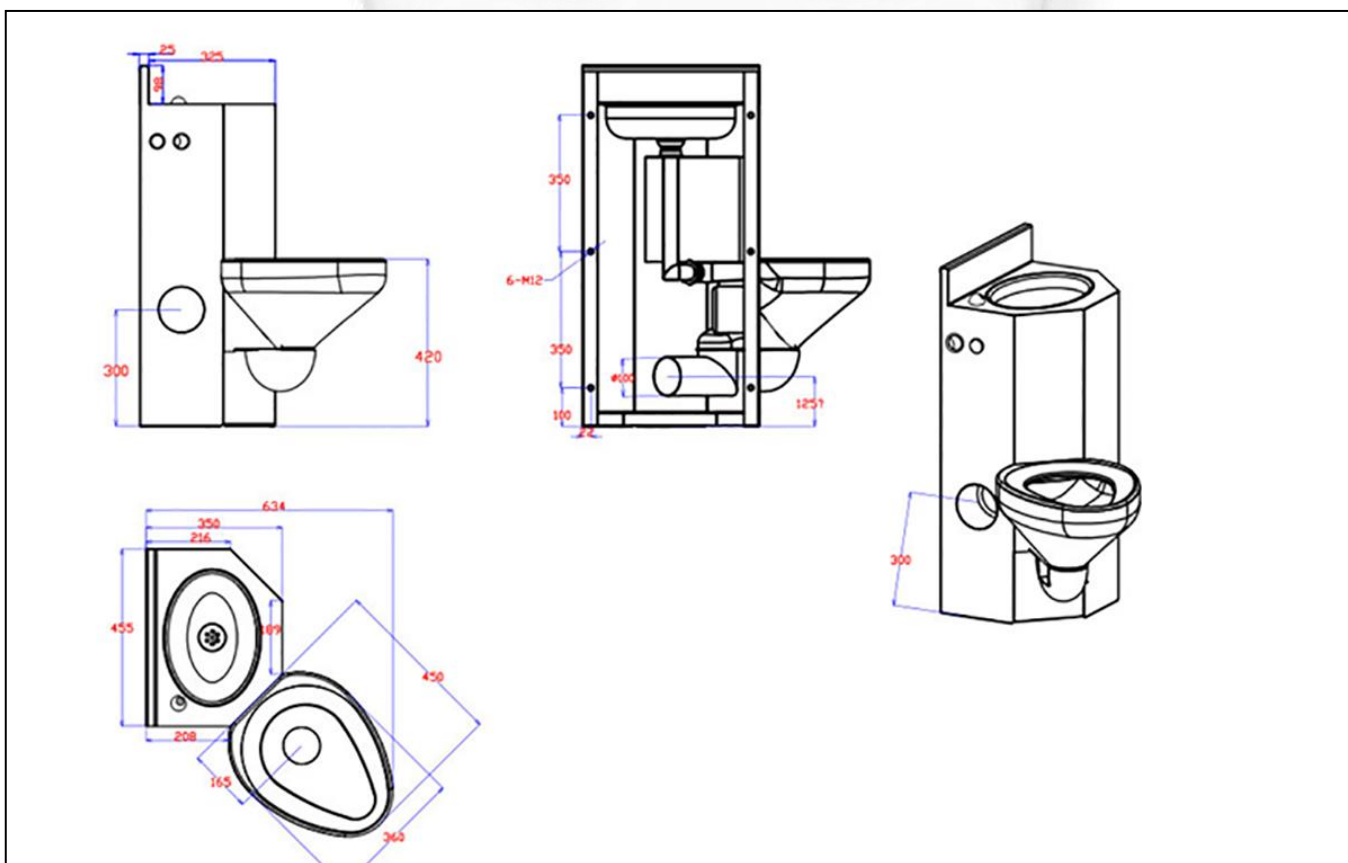



Stainless Steel Combination Toilet



SN-T218S-M

Stainless Steel Portable Combination Toilet

Size: 700 x 355 x 910 mm

Surface: satin

Material: 304 or 316 stainless steel.

Thickness: upside board | bottom board | sideboard | Wash basin (2mm)

Bowl | sideboard (1.2)

N.W.(weight): 25

G.W.(weight): 28

Drainage way: S-trap

It has the advantages of environmental protection, energy saving, sanitation, safety, and without pollution.

Simply install and repair easily. Made of 304 or 316 stainless steel, safe enough.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied





Stainless Steel Combination Toilet

**SN-T301A**

Stainless Steel Sanitary Ware One Piece Toilet

Size: 963 x 855 x 955mm

Surface: satin

Material: 304 stainless steel.

Thickness: table (1.5mm) | toilet (2.0/1.2mm)


N.W. (weight): 44

G.W. (weight): 48

Finish: surface can be polish finish, hair-line finish, mirror finish or satin finish.

Usage: To be used at schools, public toilets, trains and government prison, etc.

Function: water saving, economic, Vandal resistant, long life span, Crack- proof under strong cold area and big thermal difference area, impact and quake proof, anti-rust design.

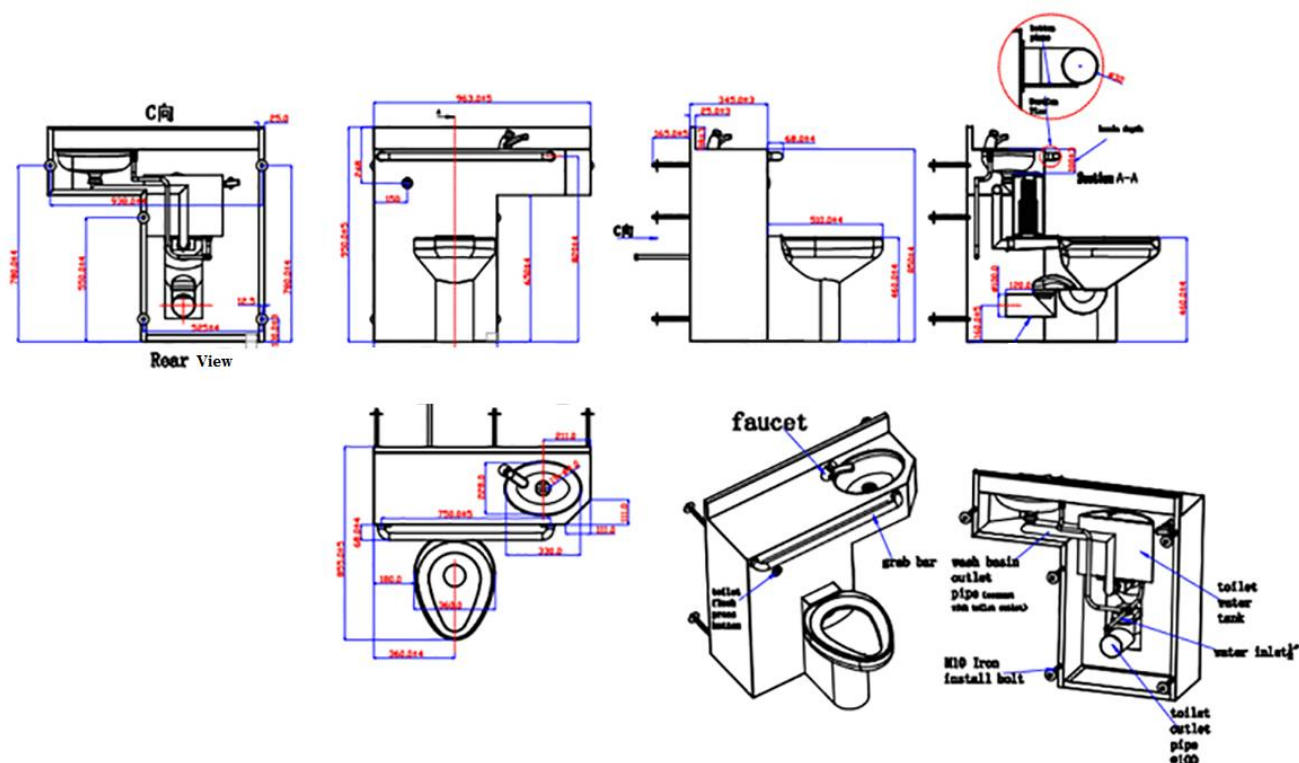



Stainless Steel Toilet




SN-T215A

Stainless-Steel-Prison/ Detention-toilet Seat

Size: 628 x 360 x 434 mm
 Material: 304 stainless steel.
 Material thickness: 2.0
 Drainage: P-trap
 Install type: floor mount
 N.W: 22KGS
 G.W: 23KGS

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and Government prison etc.

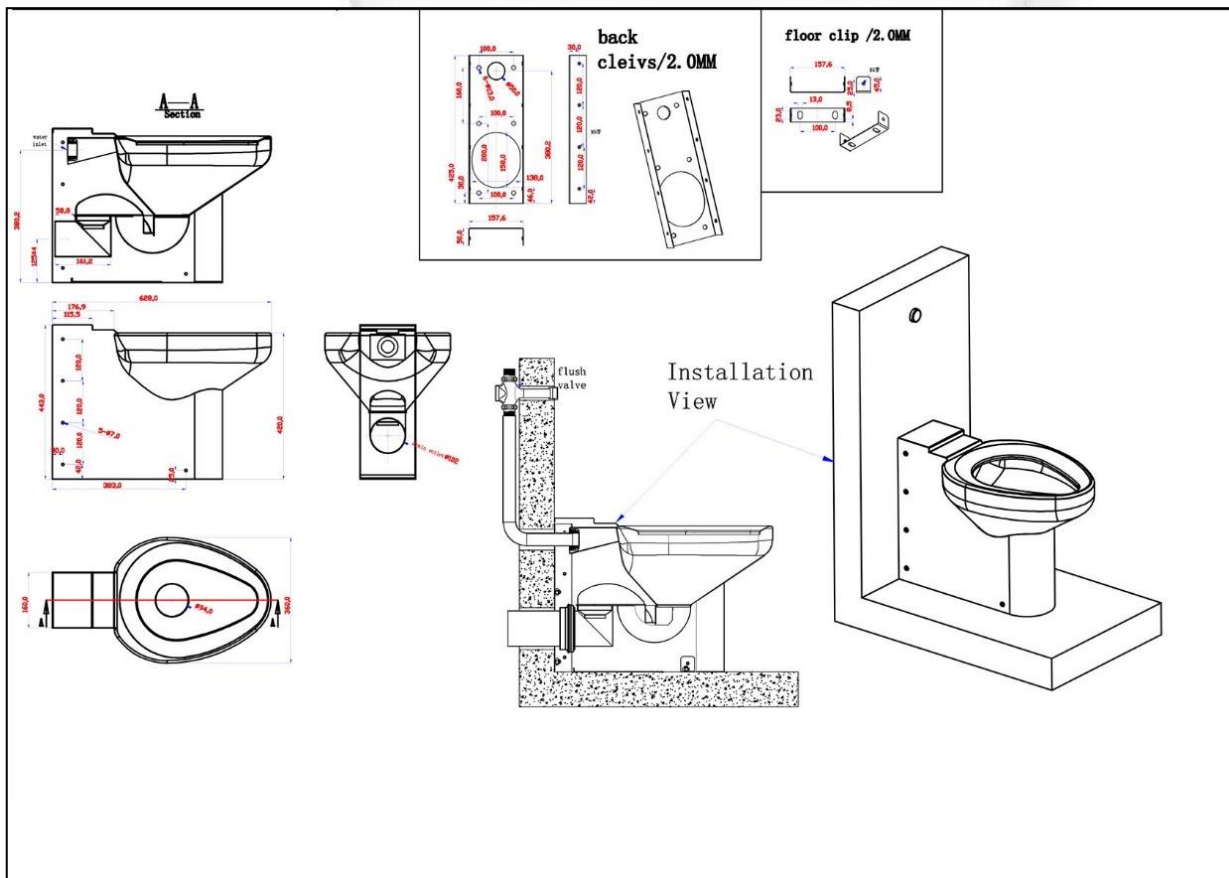



Stainless Steel Toilet



SN-T215L-B

American Style Floor Mounting P-trap Toilet Prison Style

Size: 628x360x443mm

Material: 304 stainless steel.

Thickness: panel |bowl| surrounding board (2mm)

Surface: satin

G.W. (weight): 22

N.W. (weight): 20

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.





Stainless Steel Toilet



SN-T222

Stainless Steel Multi-Function Toilet

Size: 609x360x392mm

Material: 304 stainless steel.

Thickness: water tank(1.2mm) | toilet (2mm)

Surface: satin

G.W. (weight):22kgs

N.W. (weight):20kgs

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.





Stainless Steel Toilet




SN-SH2

Stainless-steel-motor-homes-toilet

Size: 850x750x780mm
 Stainless-steel-motor-homes-toilet
 Material thickness: cabinet:1.5|toilet:2.0,1.2
 Surface: satin
 G.W.(weight):55kgs
 N.W.(weight):51kgs
 Material: SS 304


Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

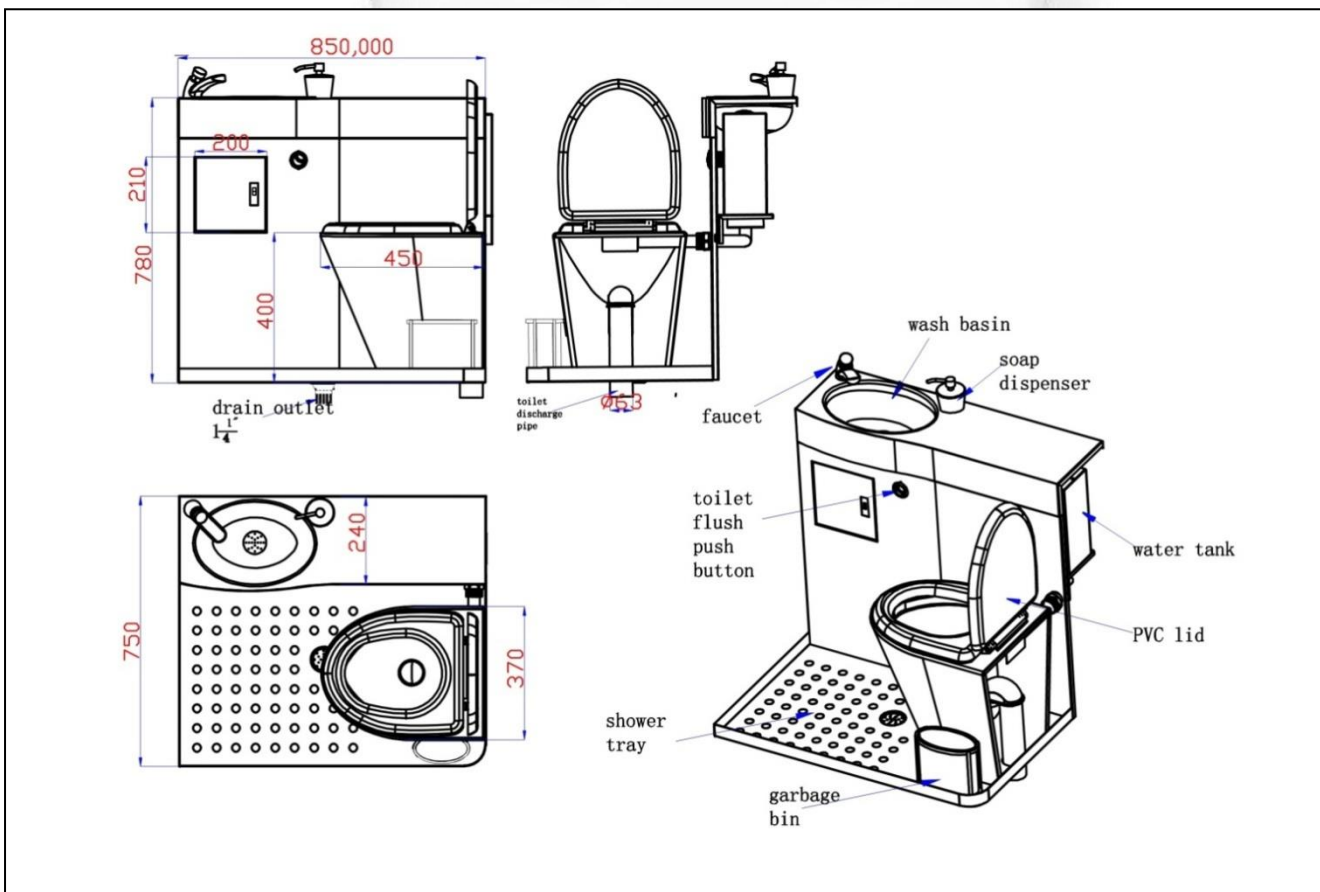



Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

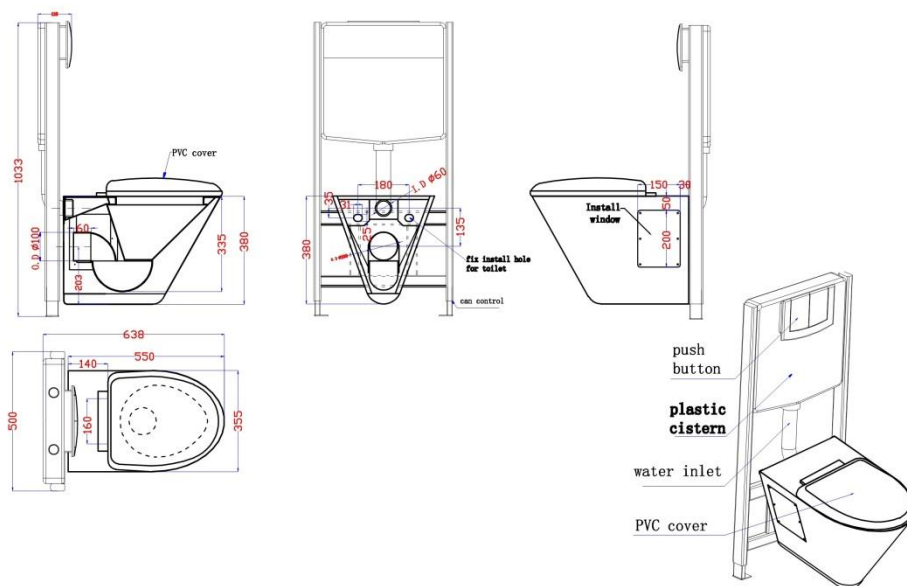



Stainless Steel Toilet




SN-T105

Standard Siphon Toilet with Water Tank Double Use Cover

Size: 620x370x670mm
 Material: 304 or 316 stainless steel
 Thickness: upside board |bottom board (2mm)
 Surround board |bowl| water tank (1.2mm)
 Surface: satin / polish
 G.W.:26kgs
 N.W.:24kgs

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

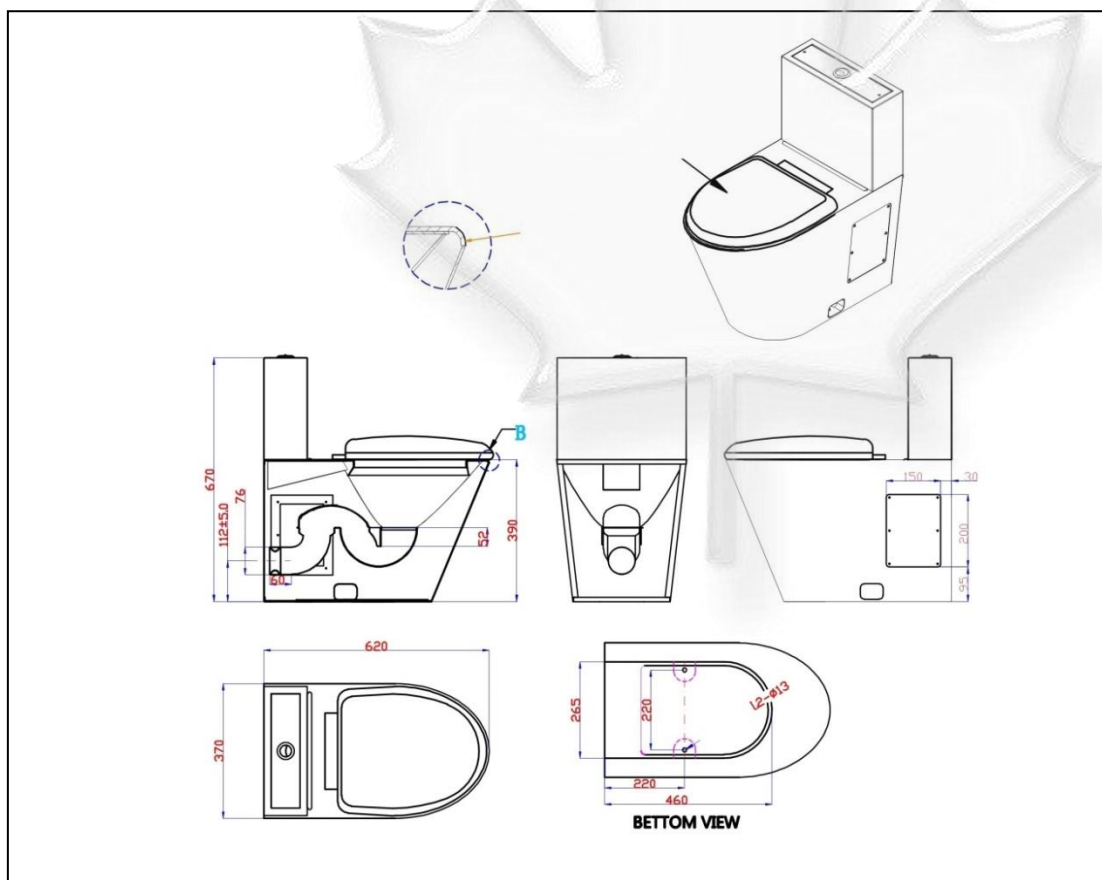



Stainless Steel Toilet



SN- T101-60

Stainless Steel Intelligent Toilet with Water Tank

Size: 620x370x670mm

Model: KG-T101-60

Surface: satin

Material: 304 stainless steel.

Thickness: upside board | bottom board (2mm)


Surround board | bowl | water tank (1.2mm)

G.W.: 24kgs

N.W.: 22kgs

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

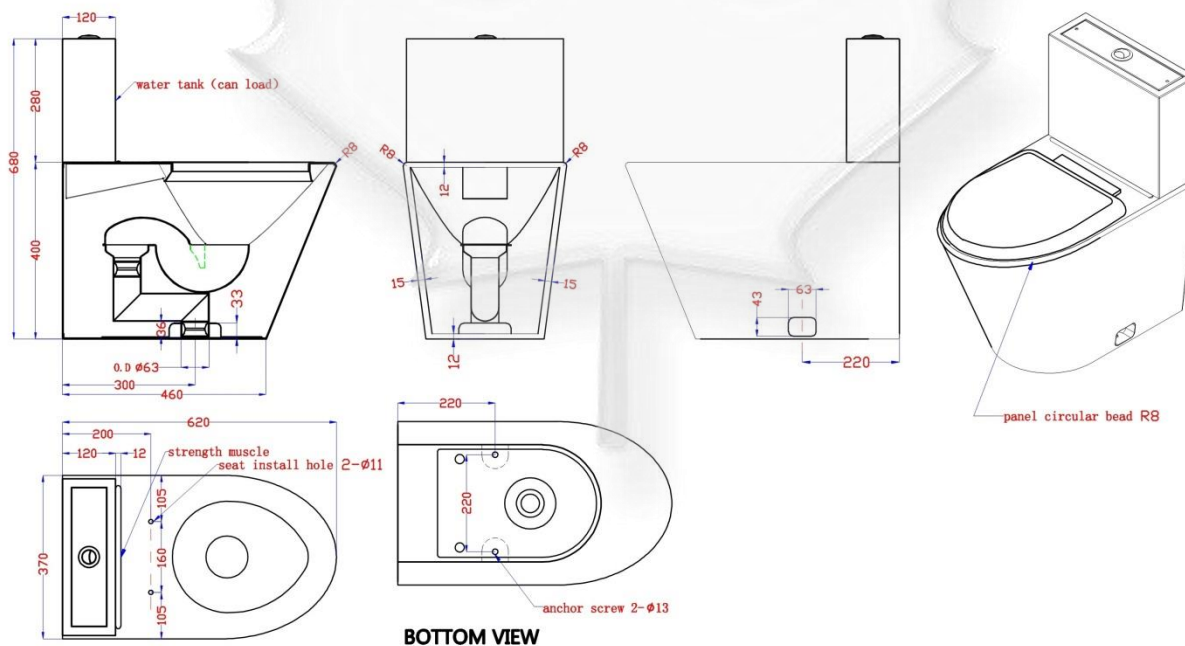



Stainless Steel Toilet



SN- T112A-98

Stainless Steel Toilet With Cistern And PVC Seat Cover

Size: 620x370x680

Surface: satin

Material: 304 or 316 stainless steel.

Thickness: Upside board (2mm)

Side board | Toilet bowl | water tank (1.2mm)

N.W. (weight): 21

G.W. (weight): 23

Drainage way: P -trap

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, School, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied





Stainless Steel Toilet



SN- T207P-W

Stainless Steel Disabled toilet

Size: 800 x 370 x 460
Surface: satin or mirror
Material: 304 stainless steel.
Thickness: upside board | bottom board (2mm)
Surround board | bowl (1.2mm)
N.W. (weight): 19
G.W. (weight): 21
Drainage way: P-trap

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.





Stainless Steel Toilet




SN-T112B-98

Stainless Steel Toilet with SS Seat Cover and Cistern

Size: 620x370x680
 Surface finish: satin
 Material: 304 or 316 stainless steel.
 Thickness: Toilet bowl| water tank (1.2mm)
 N.W. (weight): 22
 G.W. (weight): 25
 Drainage way: P-trap

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports , train , bus , night club, hospital, School, hotel and private house

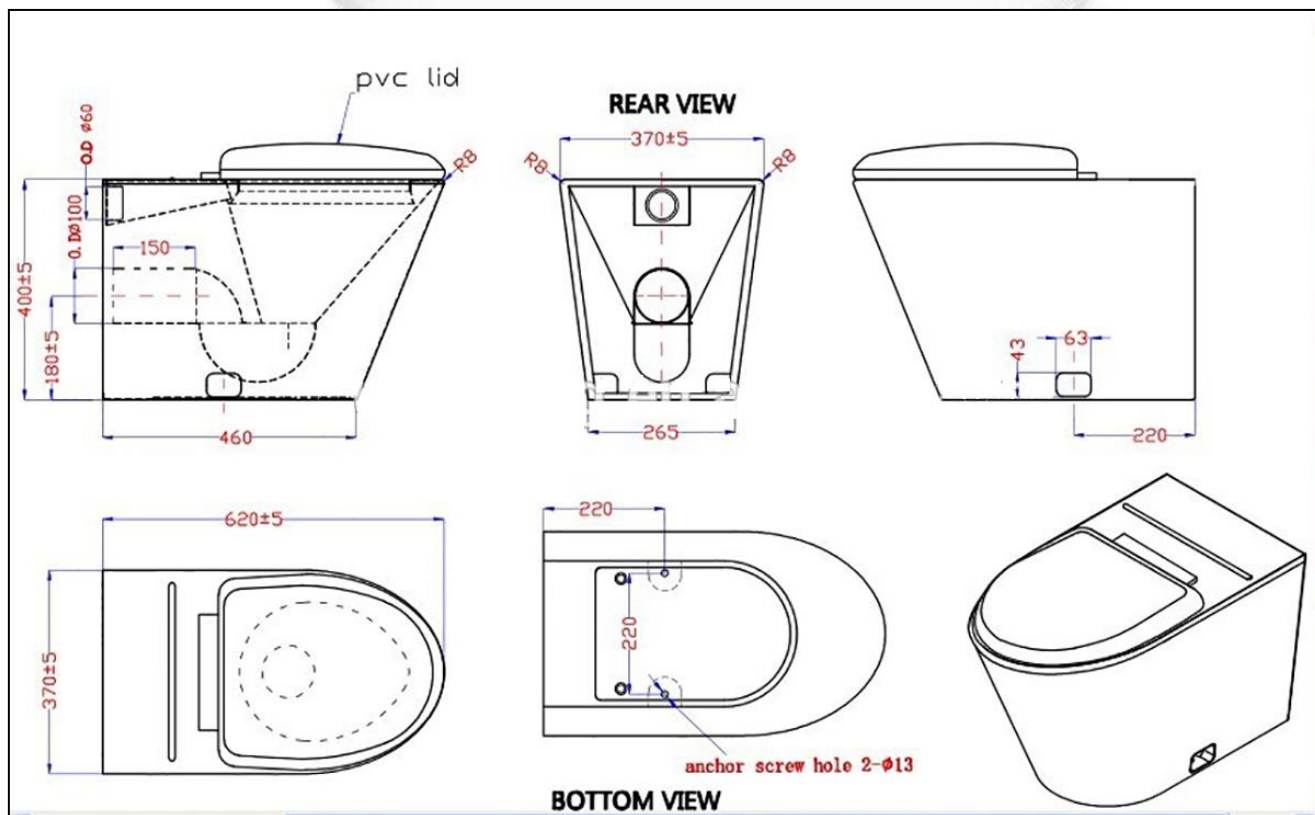



Stainless Steel Toilet



SN- T202A


Stainless Steel Toilet

Size: 620 x 370 x 400 mm
 Surface finish: satin
 Material: 304 or 316 stainless steel.
 Thickness: upside board | bottom board (2mm) | surround board | bowl (1.2mm)
 N.W.(weight): 16
 G.W.(weight): 18
 Drainage way: P-trap

Environment friendly, energy saving, sanitation, safety, non-pollution.

Widely use in public place such as airport , train , bus , night club, hospital , School, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

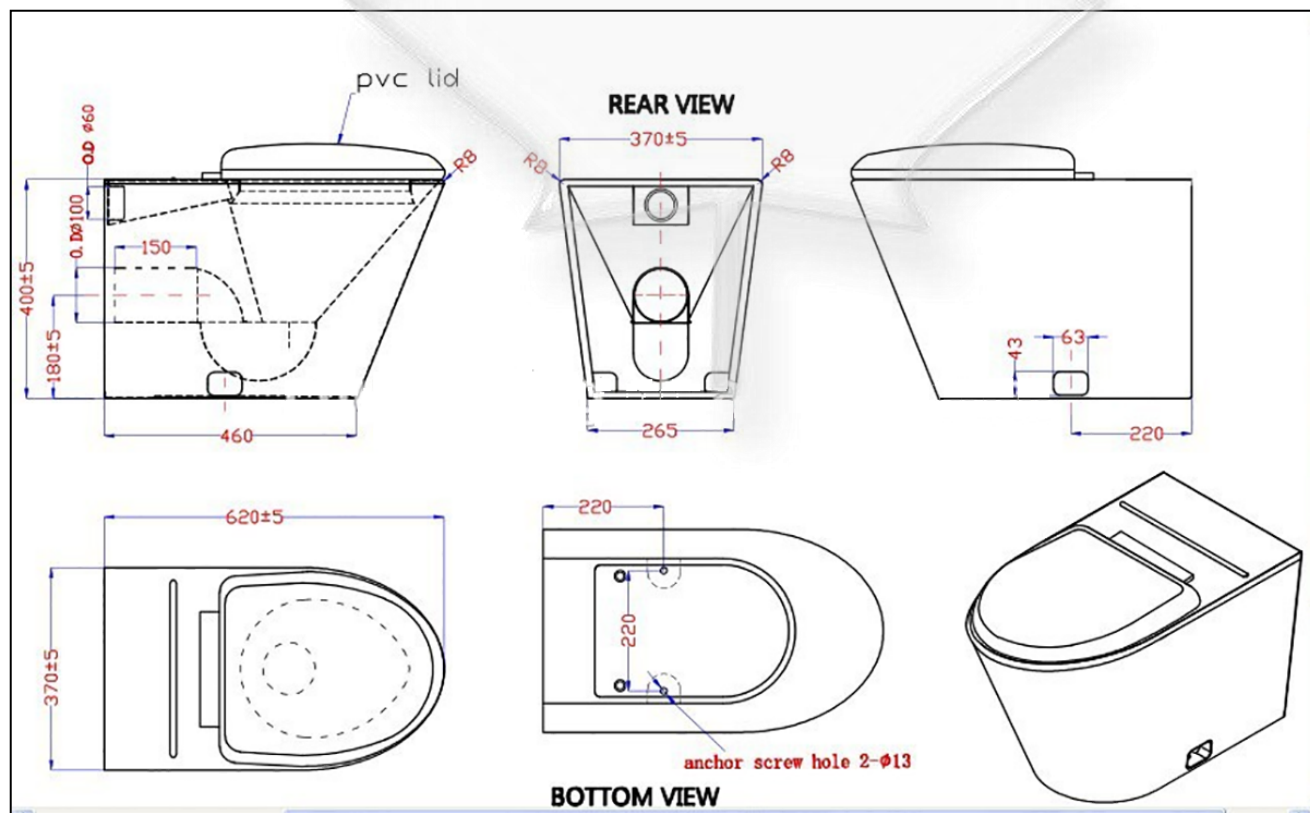



Stainless Steel Toilet



SN-T208P-G


Stainless Steel Wall Hung Toilet

Size: 550 x 355 x 380
 Surface: satin or mirror
 Material: 304 or 316 stainless steel.
 Thickness: upside board | bottom board (2mm) | surround board | bowl (1.2mm)
 N.W. (weight): 12
 G.W. (weight): 14
 Drainage way: P or S-trap

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, School, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied.

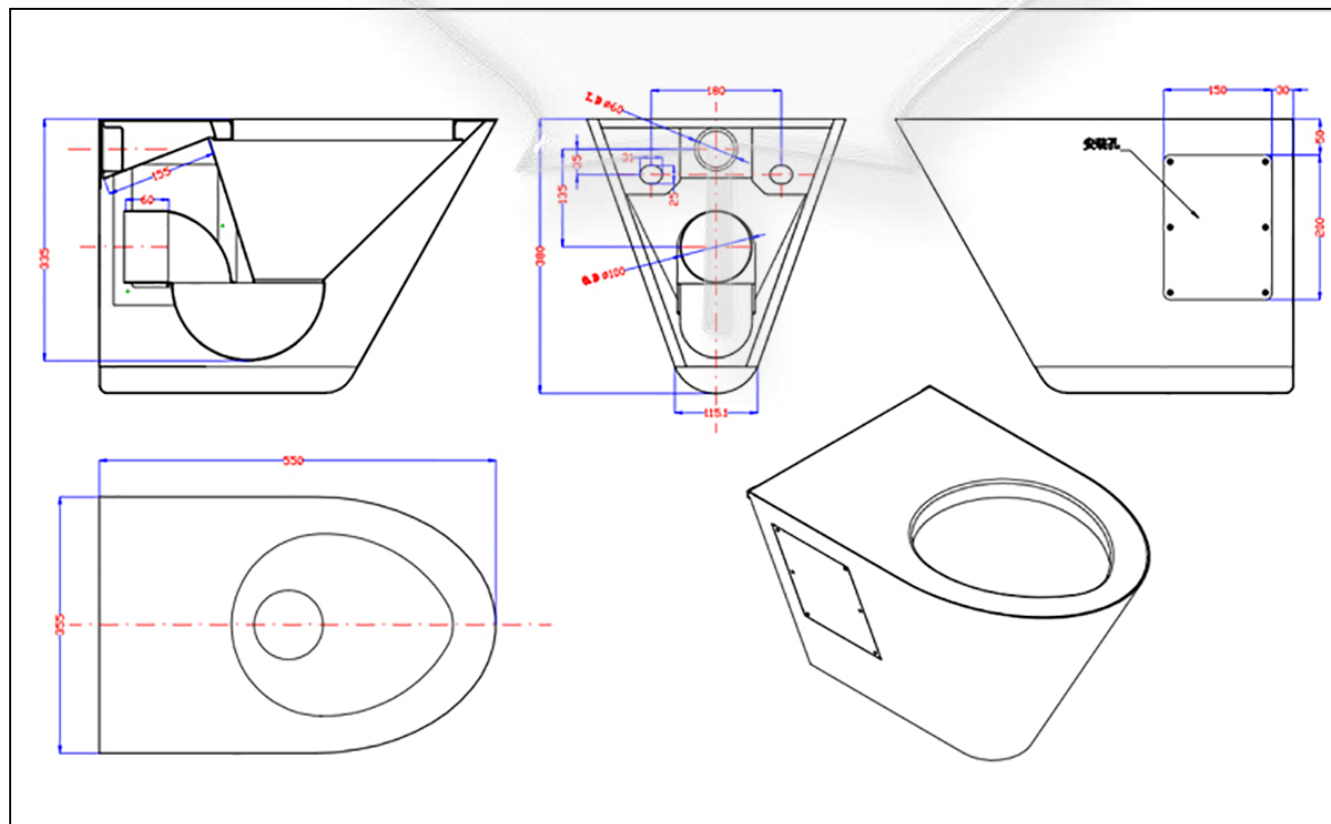



Stainless Steel Toilet



SN-T213S-W


Stainless Steel Portable Toilet

Size: 560 x 360 x 420 mm
 Surface: satin
 Material: 304 or 316 stainless steel.
 Thickness: upside board | bottom board | sideboard: (2mm)
 N.W.(weight): 14
 G.W.(weight): 16
 Drainage way: P trap or S trap

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, School, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied

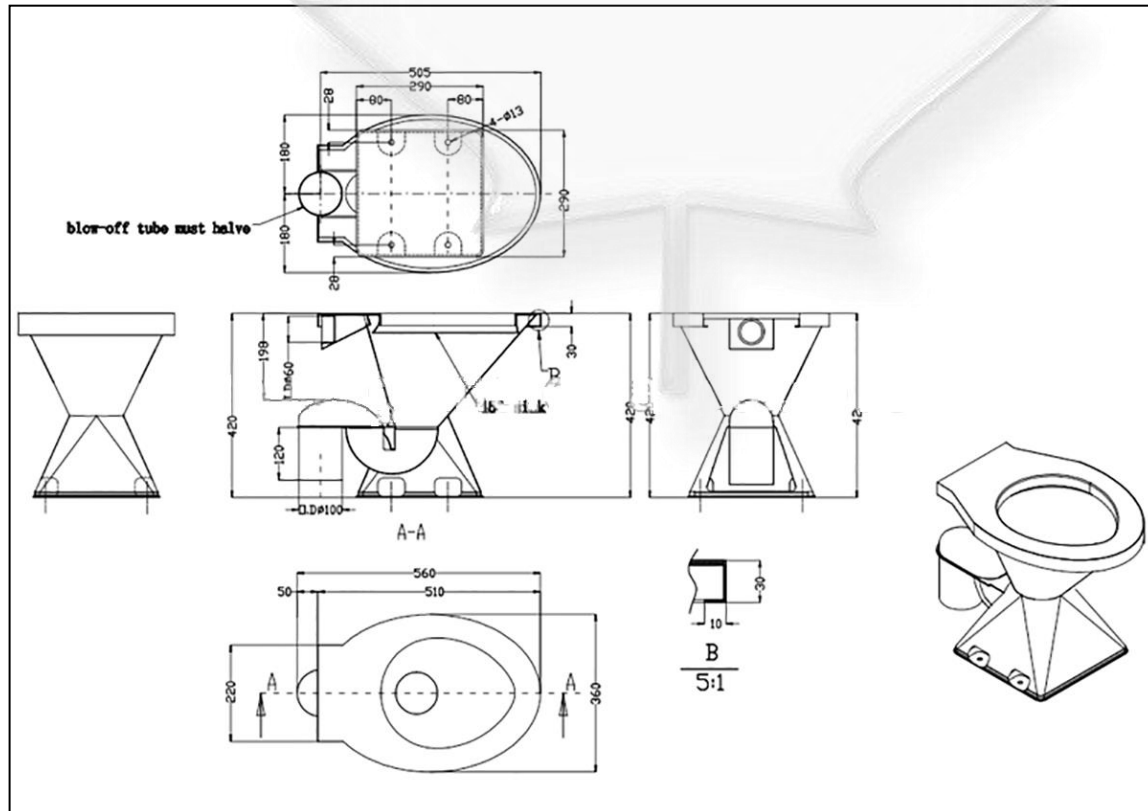



Stainless Steel Toilet



SN- T450


Stainless Steel Wall Mounted Prison Toilet

Size: 450 x 355 x 390 mm
 Surface finish: satin or mirror
 Material: 304 or 316 stainless steel.
 Thickness: upside board | bottom board | back plate: (2mm)
 surround board | bowl| paper tube (1.2 mm)
 N.W.(weight): 12
 G.W.(weight): 14
 Drainage way: P or S-trap

Environment-friendly, energy-saving, sanitation, safety and non-pollution.

Widely use in public place such as airport, train, bus, night club, hospital, school, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

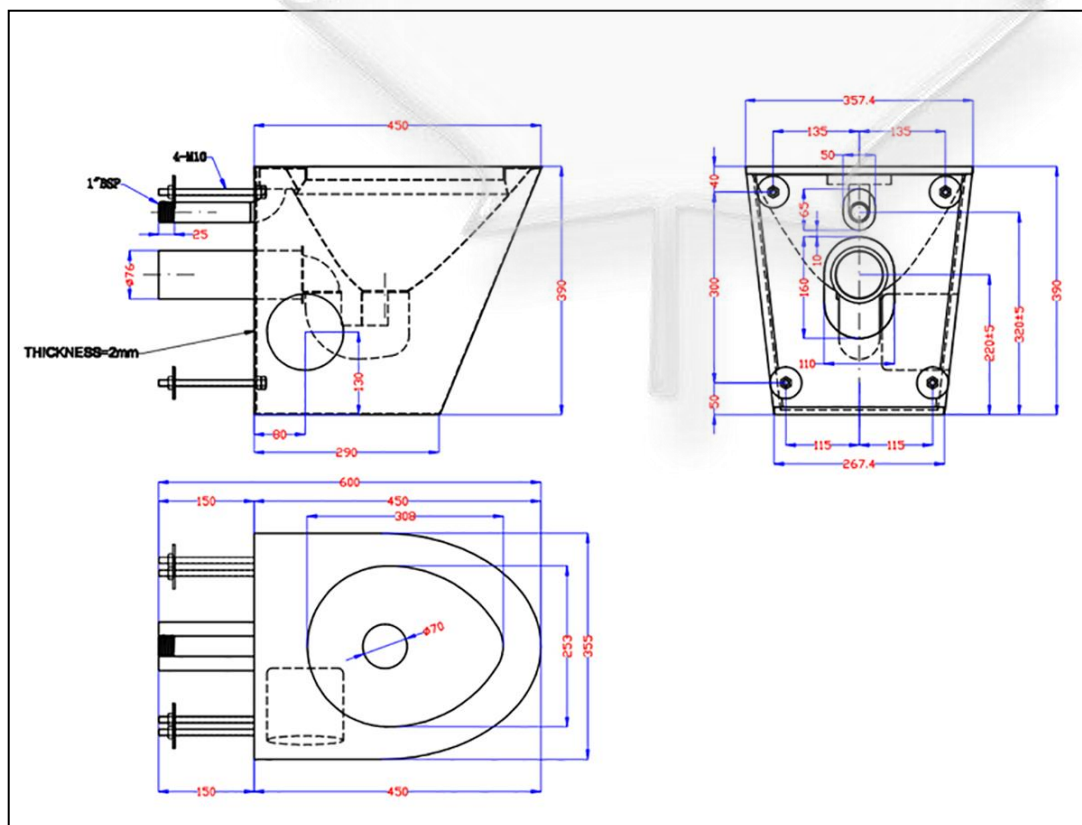



Stainless Steel Urinal



SN-U307B


Stainless Steel Urinal

Size: 395 x 360 x 615
 Surface: satin
 Material: 304 or 316 stainless steel
 Thickness: urinal(1.5mm) | sideboard (1.2mm) | rain spout (2mm)
 N.W. (weight): 7
 G.W. (weight): 9
 Drain: P-trap
 Diameter of the limber hole: 2"

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

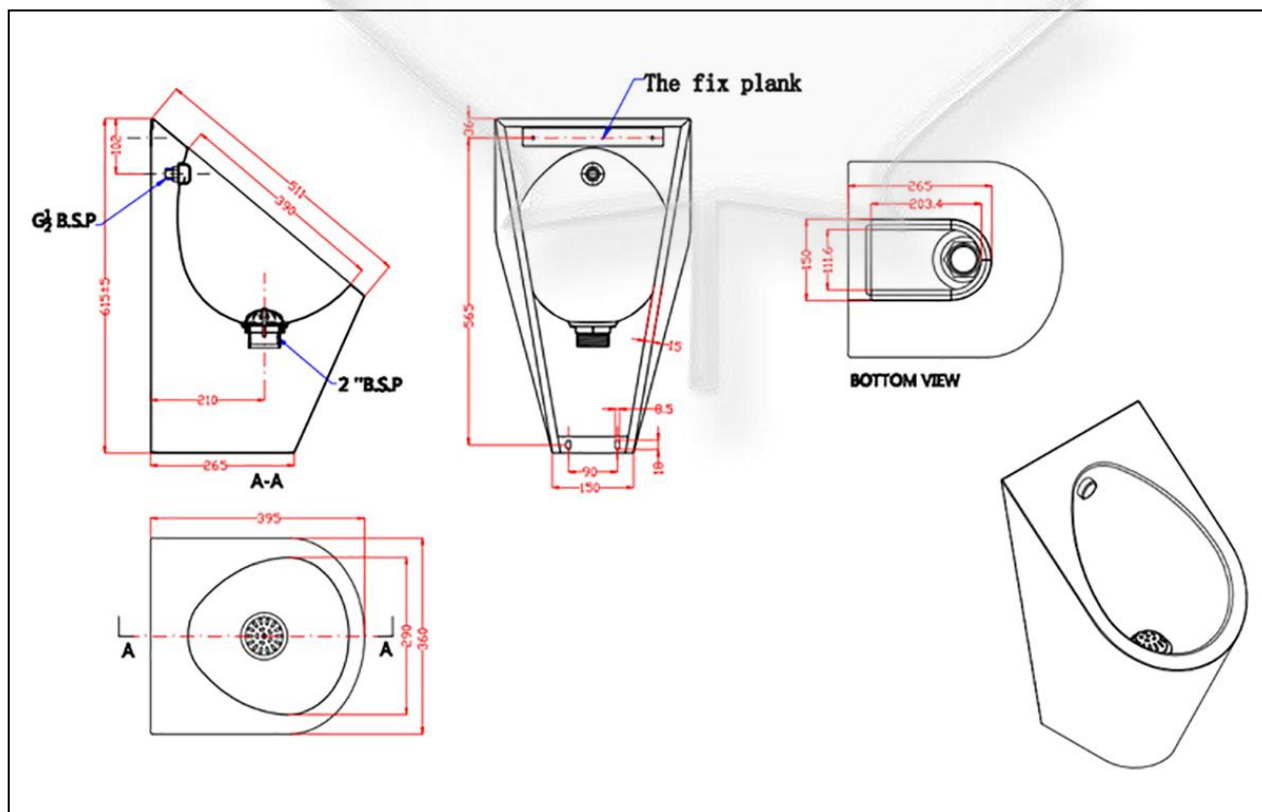



Stainless Steel Urinal



SN-U308B

Stainless Steel Wall Mount Urinal

Size: 296 x 295 x 412mm

Surface: urinal: mirror | outside: satin

Material: 304 or 316 stainless steel.

Thickness: urinal (1.5mm) | sideboard(1.2mm) | rain spout(2mm)

N.W.(weight): 12kgs

G.W. (weight): 14kgs

Drain: P-trap

Widely use in public place such as airports, train, bus, night club, Hospital, School, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.





Stainless Steel Urinal



SN-U304-F

Stainless Steel 9000 Style Rinse Free Urinal

Size: 330x305x715mm

Material: 304 or 316 stainless steel.

Thickness: upside board (3mm) | Surrounding board | Urinal (1.5mm)

Surface: satin

G.W. (weight): 16

N.W. (weight): 13

Finish: surface can be polish finish, hair-line finish, mirror finish or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.



Stainless Steel Urinal



SN-U302-L2400

Stainless Steel 1.2m Urinal Trough

Size: 1200x240x545
Surface: urinal:mirror | outside: satin
Material: 304 or 316 Stainless Steel
Thickness: sideboard(1.2mm) | rain spout (2mm)
N.W. (weight): 13 kgs
G.W. (weight): 15 kgs
Drain: P-trap
Distance of the limber hole: 2"

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.



Stainless Steel Urinal



KG-U302-L600


Stainless Steel Male Urinal

Size: 600X240X545mm
 Surface: satin
 Material: 304 or 316 Stainless Steel
 Thickness: Urinal 1.2mm
 N.W. (weight): 8 kgs
 G.W. (weight): 9kgs
 Drain: P-trap
 Distance of the limber hole: 2"

It has the advantages of environmental protection, energy saving sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

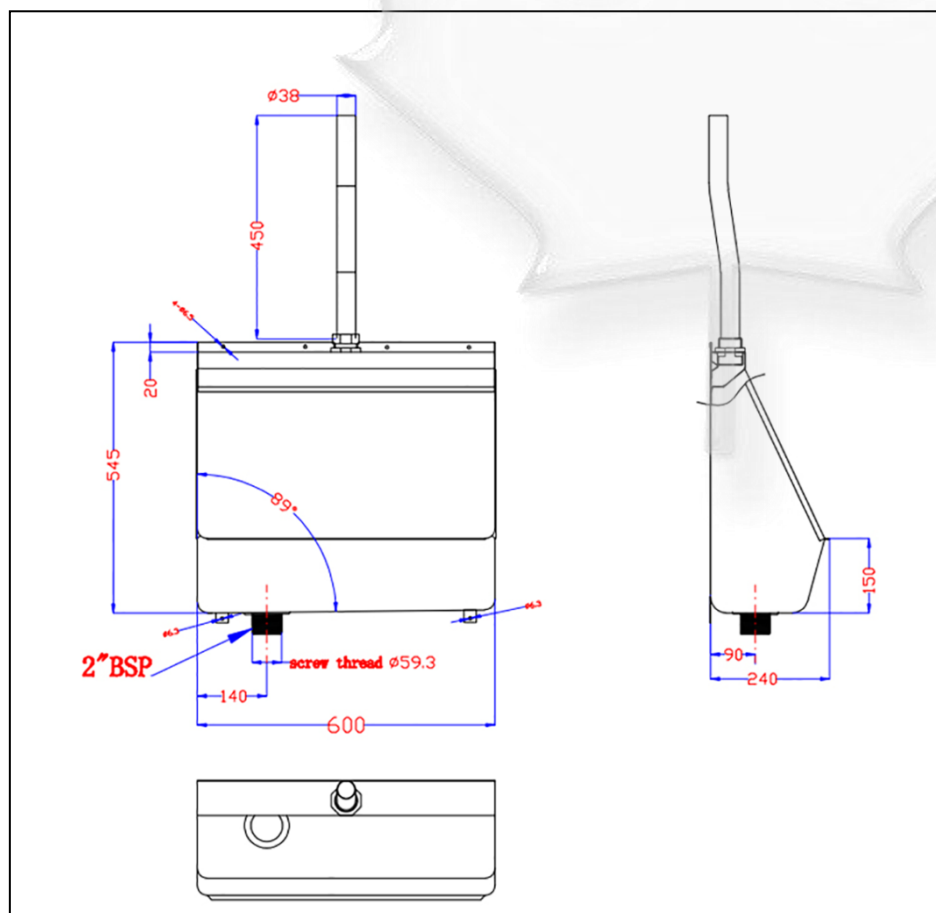

Stainless Steel Urinal



SN-U303T-W

Stainless Steel Urinal

Size: 300X340X455mm

Surface: satin

Material: 304 or 316 Stainless Steel


Thickness: the whole | bottom medicine box 1.2mm

N.W. (weight): 5kgs

G.W. (weight): 3kgs

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

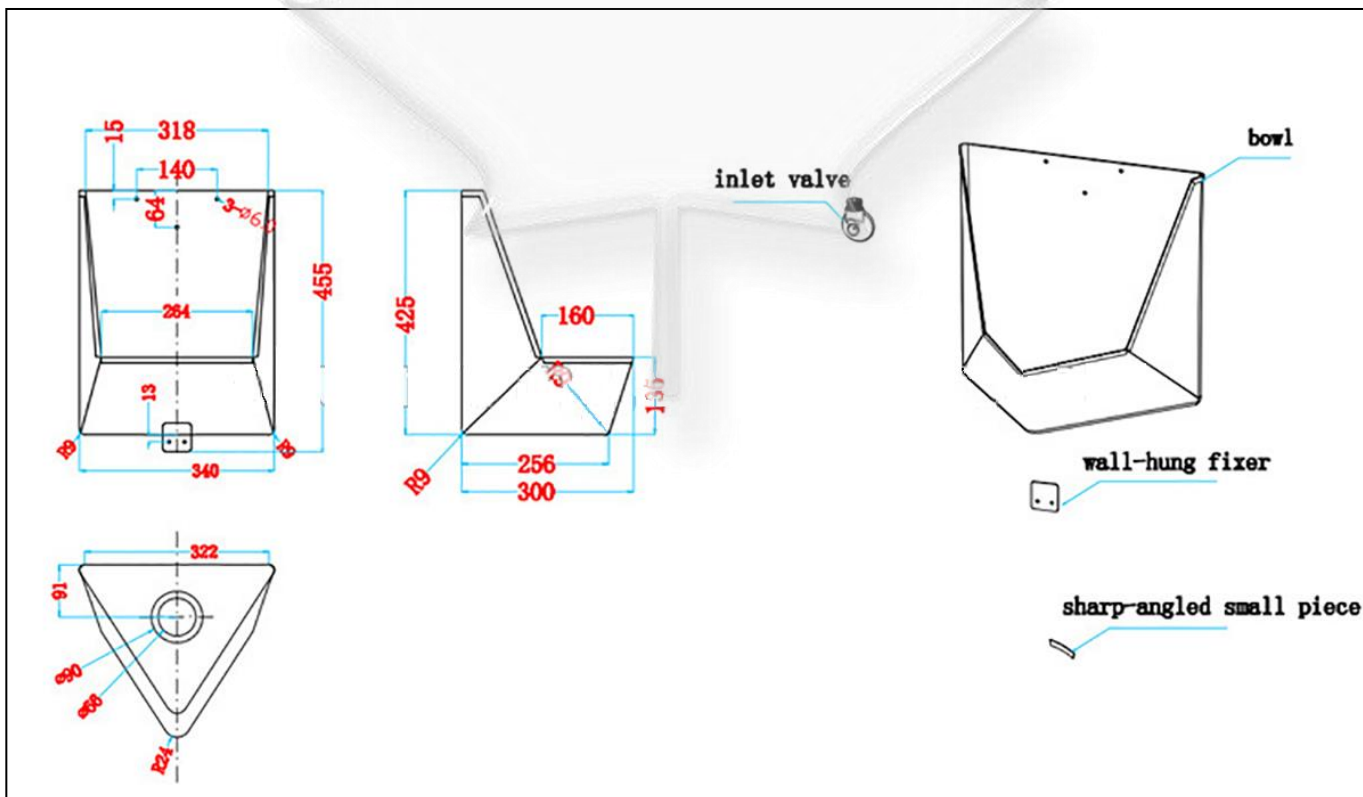

Stainless Steel Wash Basin




SN-L406C

Stainless Steel Vandal-proof Prison Wash Basin

Size: 510x360x270 mm
 Surface: satin
 Material: 304 or 316 Stainless Steel
 Thickness: Basin (1mm) | Surround board, bottom board (1.2mm)
 N.W. (weight): 7 kgs
 G.W. (weight): 9 kgs

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

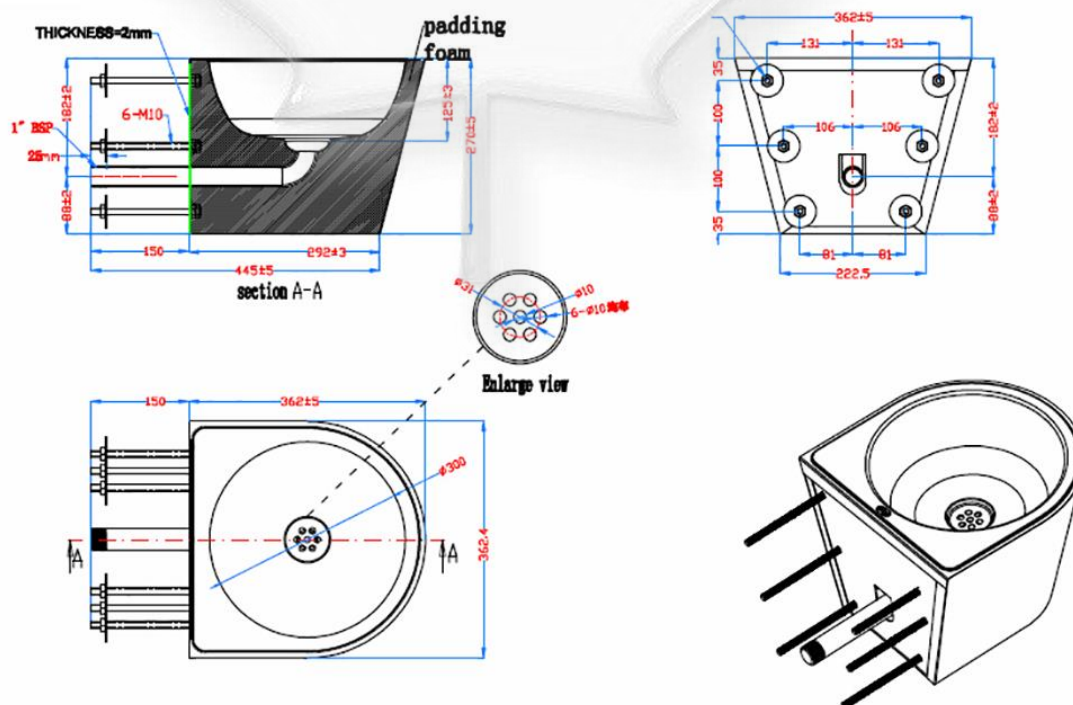

Stainless Steel Wash Basin



SN- L405

Stainless Steel Columnar Wash Basin

Size: 510x426x810mm

Surface: satin

Material: 304 stainless steel.

Thickness: outside basin, basin, rotor (0.8mm) | Rotor fixer (1.2mm)


soap dish (0.6mm)

G.W.:8kgs

N.W.:6kgs

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

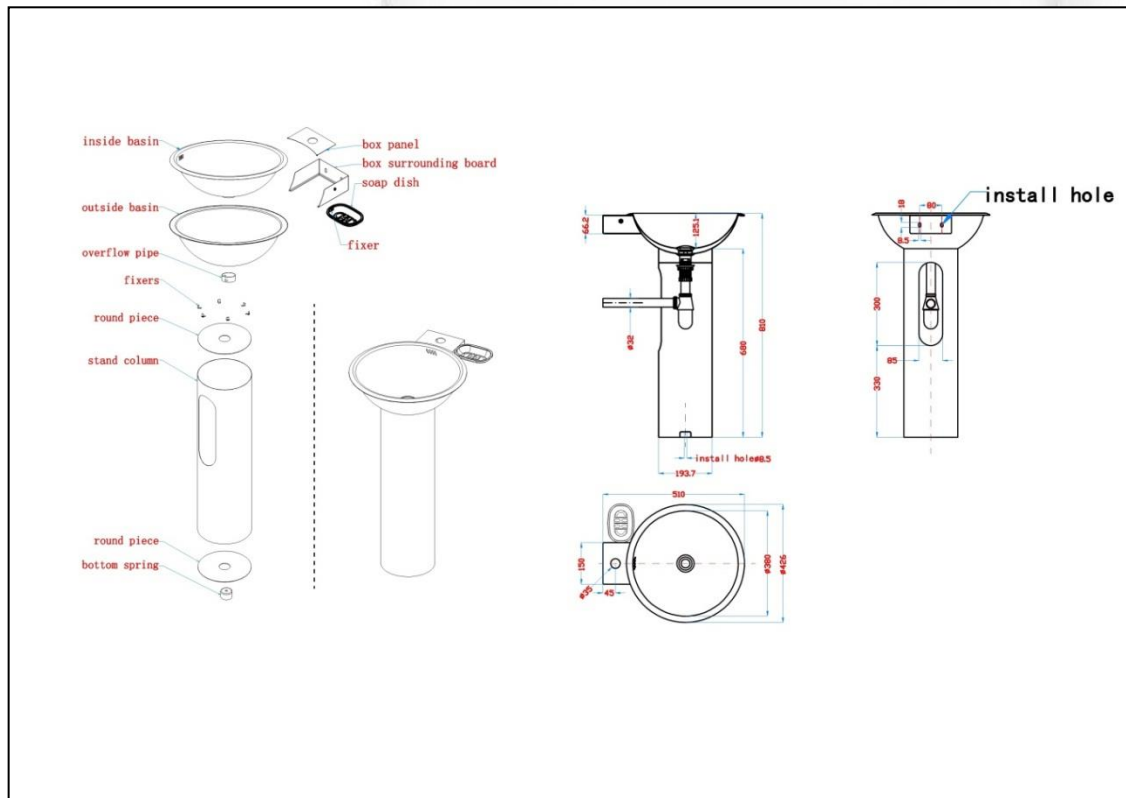

Stainless Steel Wash Basin



SN- L404

Stainless Steel Cup Shaped Wash Basin without Faucet

Size: 535x426x850mm

Surface: satin

Material: 304 stainless steel.

Thickness: basin, rotor, side board, taper cylinder: (0.8mm)


Hung box (1.2mm) | Cover board (2mm)

G.W.: 13kgs

N.W.: 11kgs

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

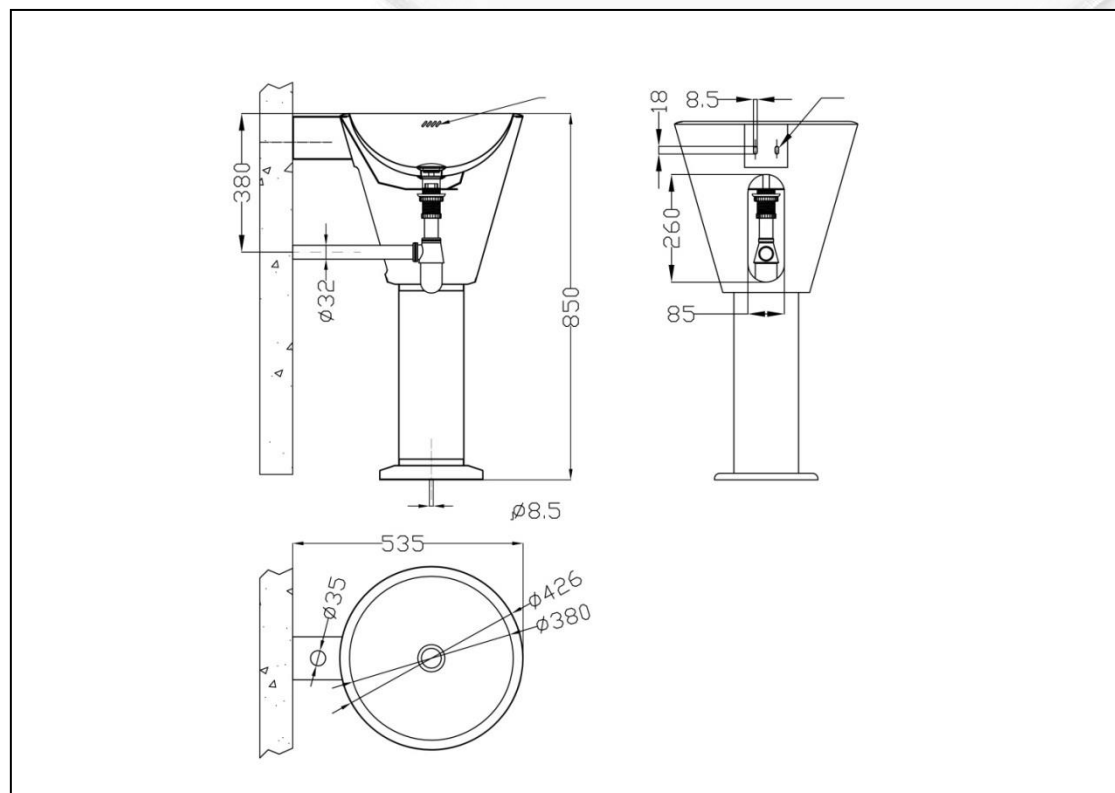

Stainless Steel Wash Basin



SN- L403

Stainless Steel Wall Hung Wash Basin Without Faucet

Size: 530x426x185mm

Surface: satin

Material 304 stainless steel.

Thickness: inner basin | outside basin | surrounding board (0.8mm)

Square box board (1.2mm) | box cover board (2mm)


G.W.: 7kgs

N.W.: 6kgs

Material: SS 304

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

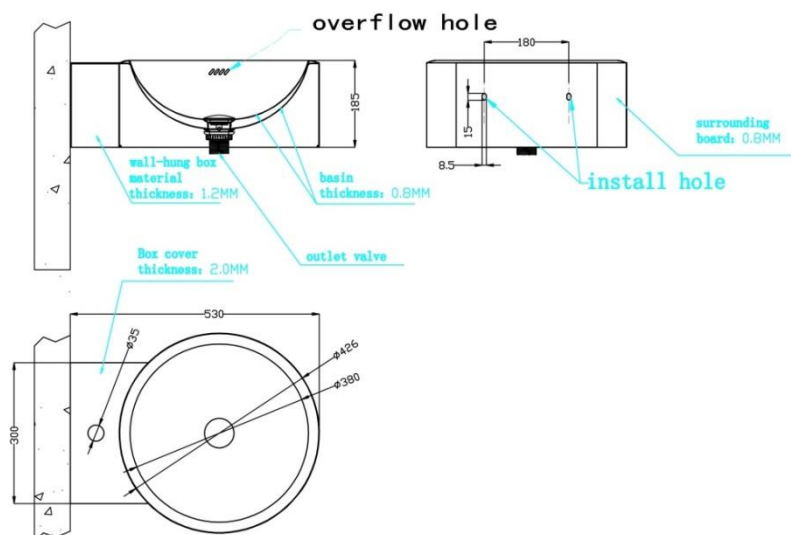

Stainless Steel Wash Basin



SN- L402

Stainless Steel Desktop Wash Basin

Size: 426x185mm

Thickness: basin, Surrounding board (0.8mm) | Bottom cap (2mm)


G.W.: 5kgs

N.W.: 4kgs

Material: 304 stainless steel.

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

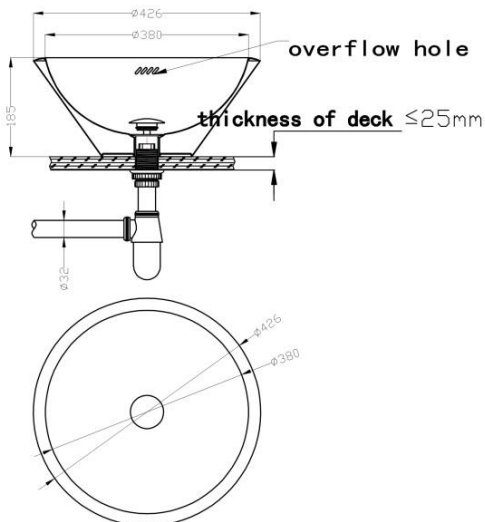

Stainless Steel Wash Basin



SN- L401

Stainless Steel Cone Shaped Wash Basin Without Faucet

Size: 535x426x840mm

Thickness: inner basin | outside basin | taper cylinder (0.8mm)

Cube box for hung | Cover sheet (2mm)

Surface: satin


G.W. (weight): 11kgs

N.W. (weight): 9kgs

Material: SS 304

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

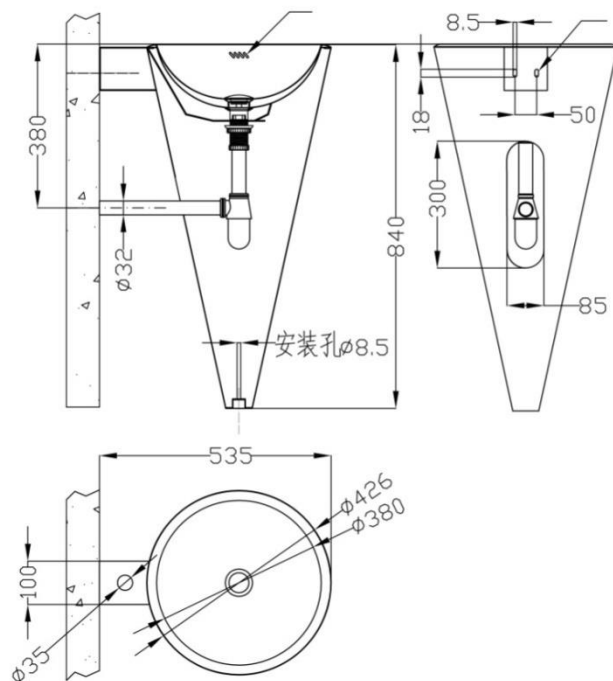

Stainless Steel Wash Basin



SN- L182

Stainless Steel Standing Square Wash Basin

Size: 450x350x950mm

Thickness: basin (1mm) | Surrounding board, front bezel, bottom board (2mm)

Surface: satin


G.W.(weight): 20kgs

N.W.(weight): 18kgs

Material: 304 stainless steel.

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

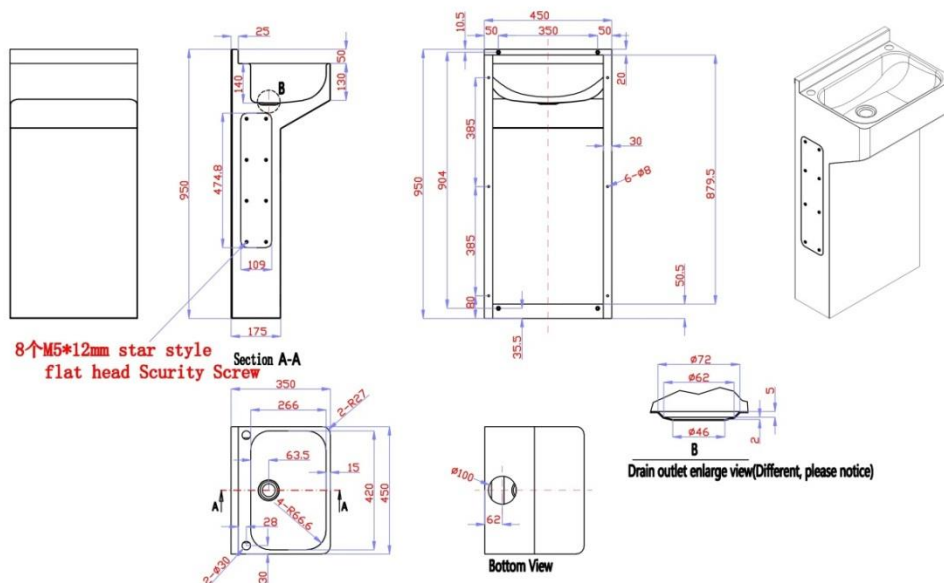

Stainless Steel Wash Basin




SN- L406-50

Stainless Steel Wash Basin

Size: 365x362x210mm
 Material: 304 stainless steel
 Thickness: bowl (1mm) | Surround board (1.2mm)
 G.W: 5kgs
 N.W: 4kgs
 Surface finish: satin

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and government prison, etc.

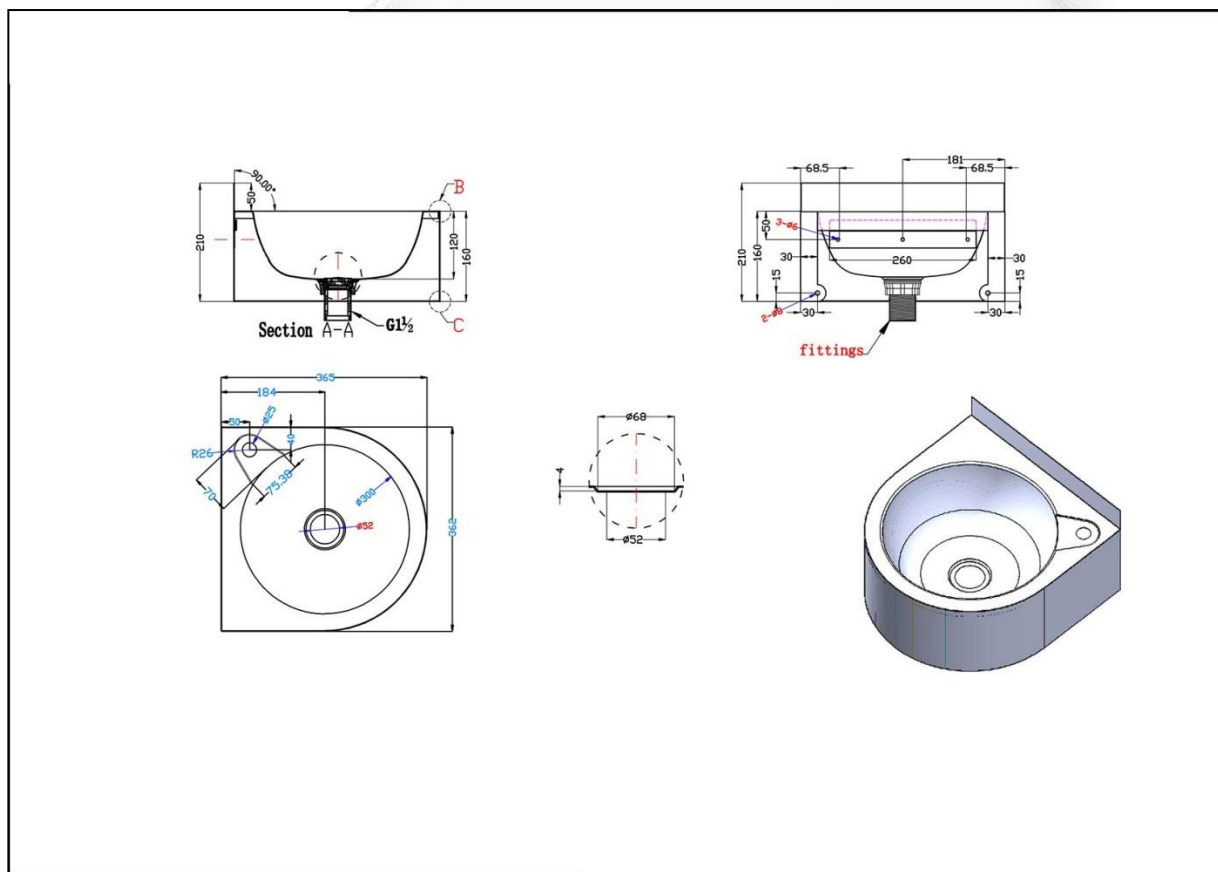

Stainless Steel Wash Basin



SN- L408

Stainless Steel Square Wash Basin

Size: 500 x 408 x 165 mm

Thickness: Basin (1mm)

Surface: satin


N.W.(weight): 4

G.W.(weight): 5

Material: SS 304

Finish: surface can be polish finish, hair-line finish, mirror finish, or satin finish.

Usage: To be used at schools, public toilets, trains and government prison, etc.

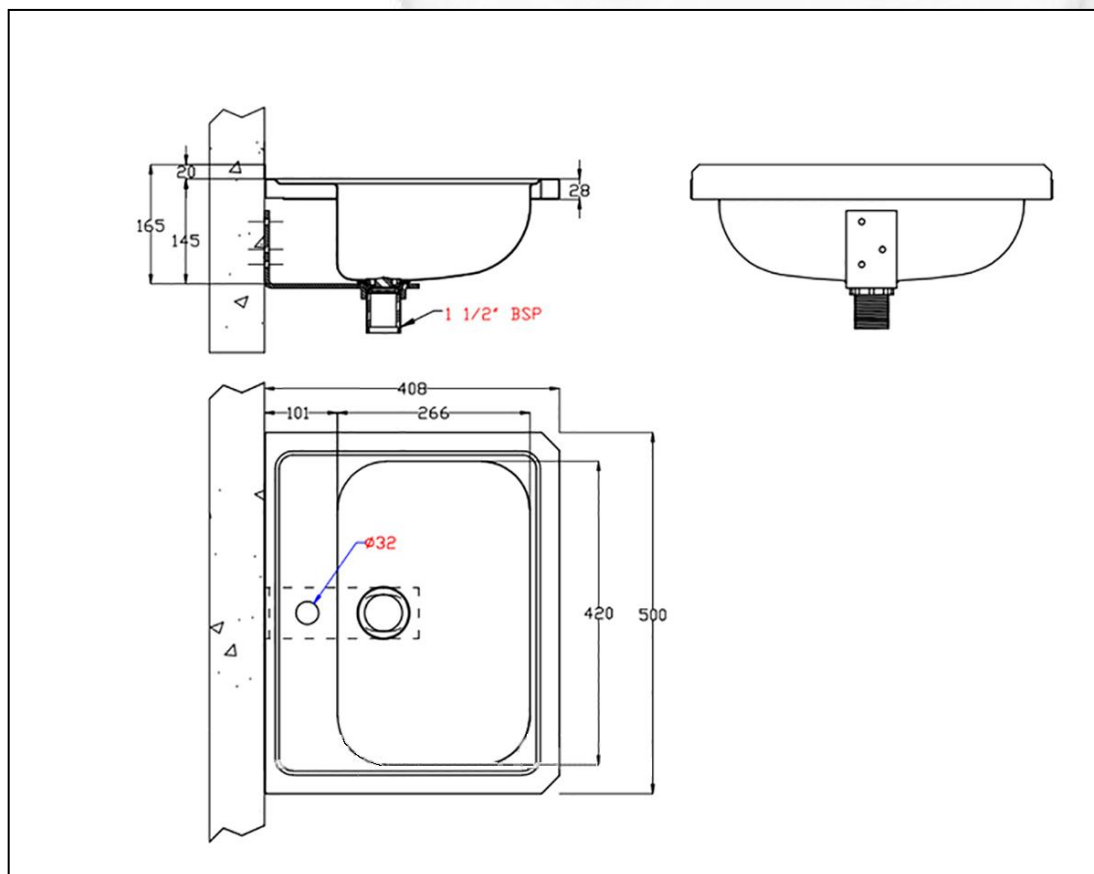

Stainless Steel Wash Basin



SN-L408-1


Stainless Steel Pedestal Wash Basin

Size: 500x408x800
 Surface: satin
 Material: SS 304 or 316
 Thickness: basin (1mm) | column(1.2mm)
 N.W. (weight): 6
 G.W. (weight): 8

It has the advantages of environmental protection, energy saving, sanitation, safety and without pollution.

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

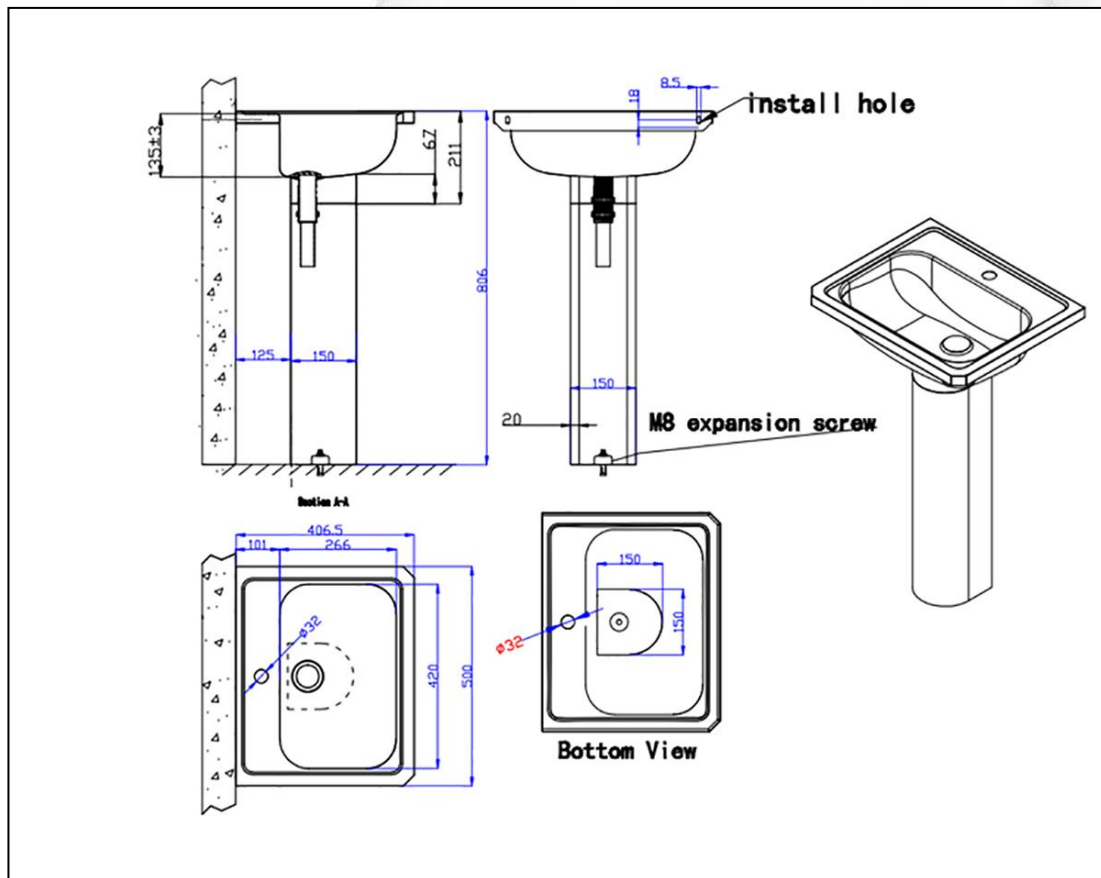



Stainless Steel Wash Basin



SN-L415-L1200

Stainless Steel Wash Trough

Size: 1200 x 430 x 290

N.W. (weight): 17

G.W. (weight): 15

Thickness: Basin | panel | side board | bottom board(1.2mm)

Surface: satin

Material: 304 stainless steel.

Finish: surface can be polish finish, hair-line finish, mirror finish or satin finish.

Usage: As a SS squat pan to be used at schools, public toilets, trains and Government prison etc.



Stainless Steel Squatting Pan



SN-S202


Stainless Steel Squatting Pan

Size: 505 x 360 x 213
 Surface finish: satin or mirror
 Material: 304 or 316 stainless steel.
 Thickness: upside board | bowl (1.2mm)
 N.W. (weight): 4
 G.W. (weight): 5
 Application: Adult, Children

Environment-friendly, energy-saving, sanitation, safety and non-pollution.

Widely use in public place such as airport, train, bus, night club, hospital, School, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

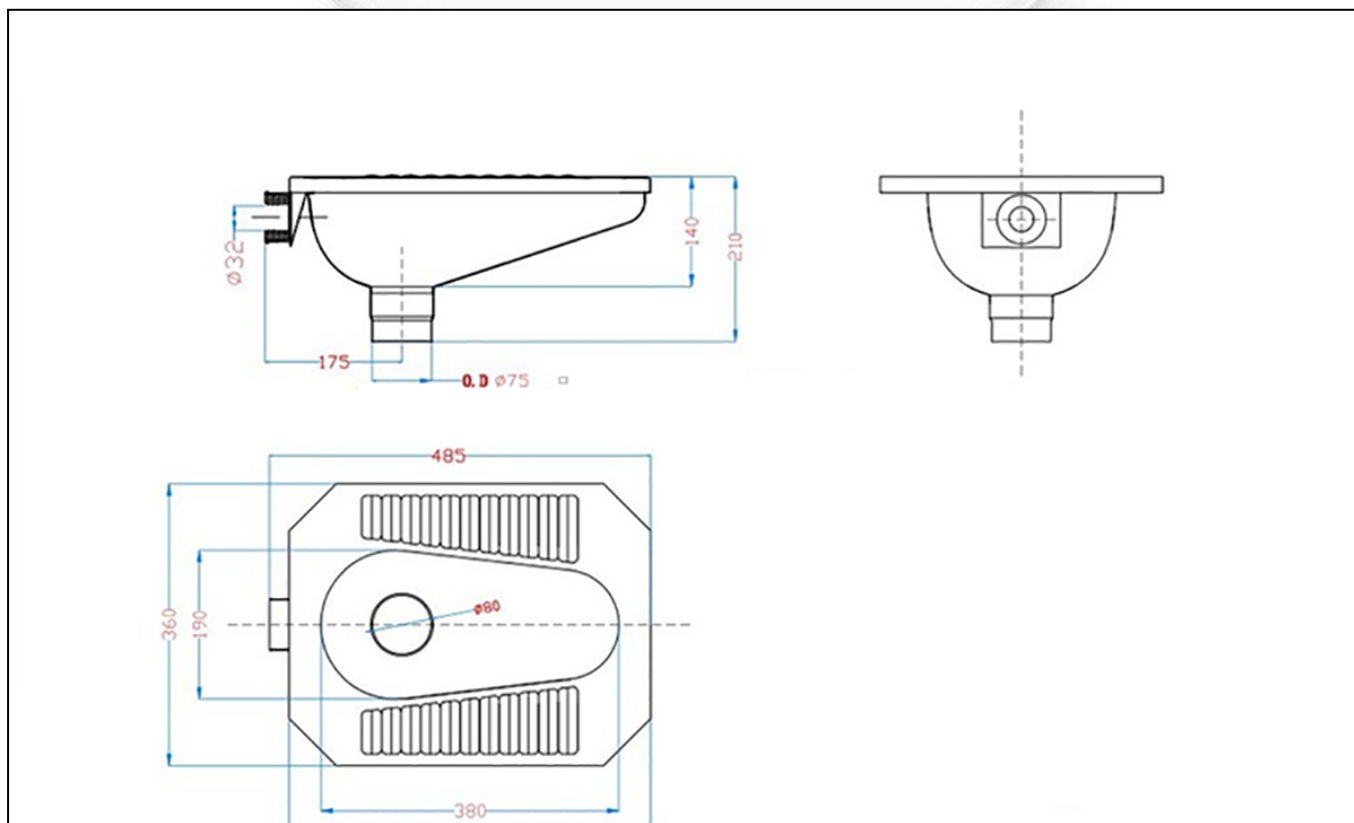

Stainless Steel Squatting Pan



SN-S203

Stainless Steel Squatting Pan with Cistern

Size: 670 x 430 x 370

Surface: satin

Thickness: Water tank | upside board | bowl (1.2mm) | Siphon trap(0.7mm)


N.W. (weight): 13

G.W. (weight): 11

Material: 304 or 316 Stainless Steel

Widely use in public place such as airports, train, bus, night club, hospital, School, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied

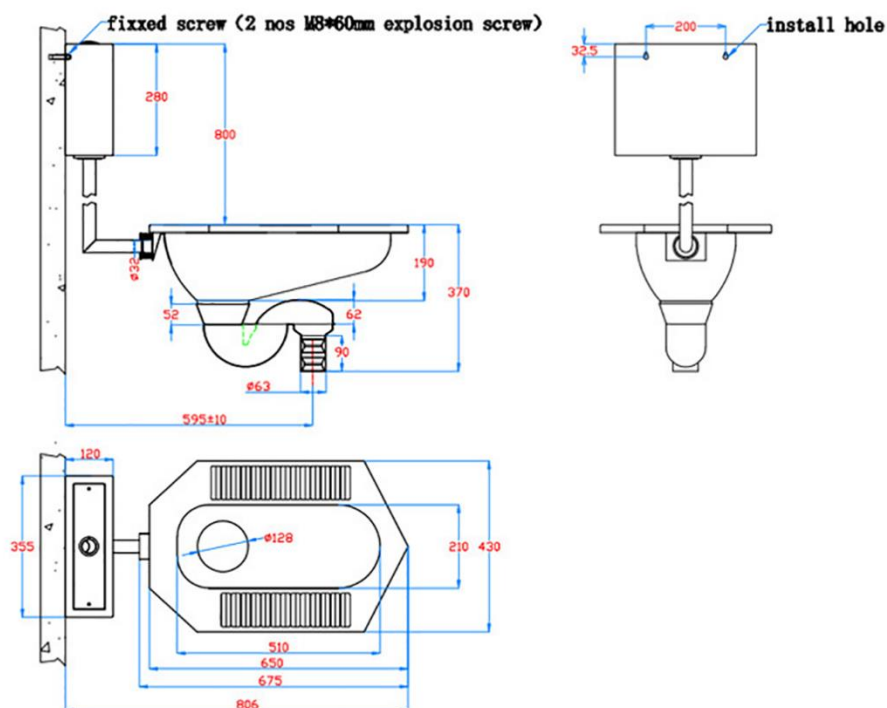



Stainless Steel Squatting Pan



SN-S206

Stainless Steel Squatting Pan

Size: 700 x 700 x 230 mm

Surface finish: satin

Thickness: the whole (1.2mm)

N.W. (weight): 7

G.W. (weight): 8

Application: Adult, Children

Material: 304 or 316 stainless steel material

Widely use in public place such as airport, train, bus, night club, Hospital, School, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.



Stainless Steel Squatting Pan




SN-S226

Stainless Steel Squatting Pan

Size: 780 x 630 x 305 mm
 Surface finish: satin
 Material: 304 or 316 stainless steel material
 Thickness: squat pan (1.2mm) | edge plate (2mm)
 N.W.(weight): 8
 G.W.(weight): 10
 Application: Adult, Children

Widely use in public place such as airport, train , bus , night club, hospital, School, hotel, jail and your own house.

Floor mounted or wall installed, simple and stable, all accessories supplied.

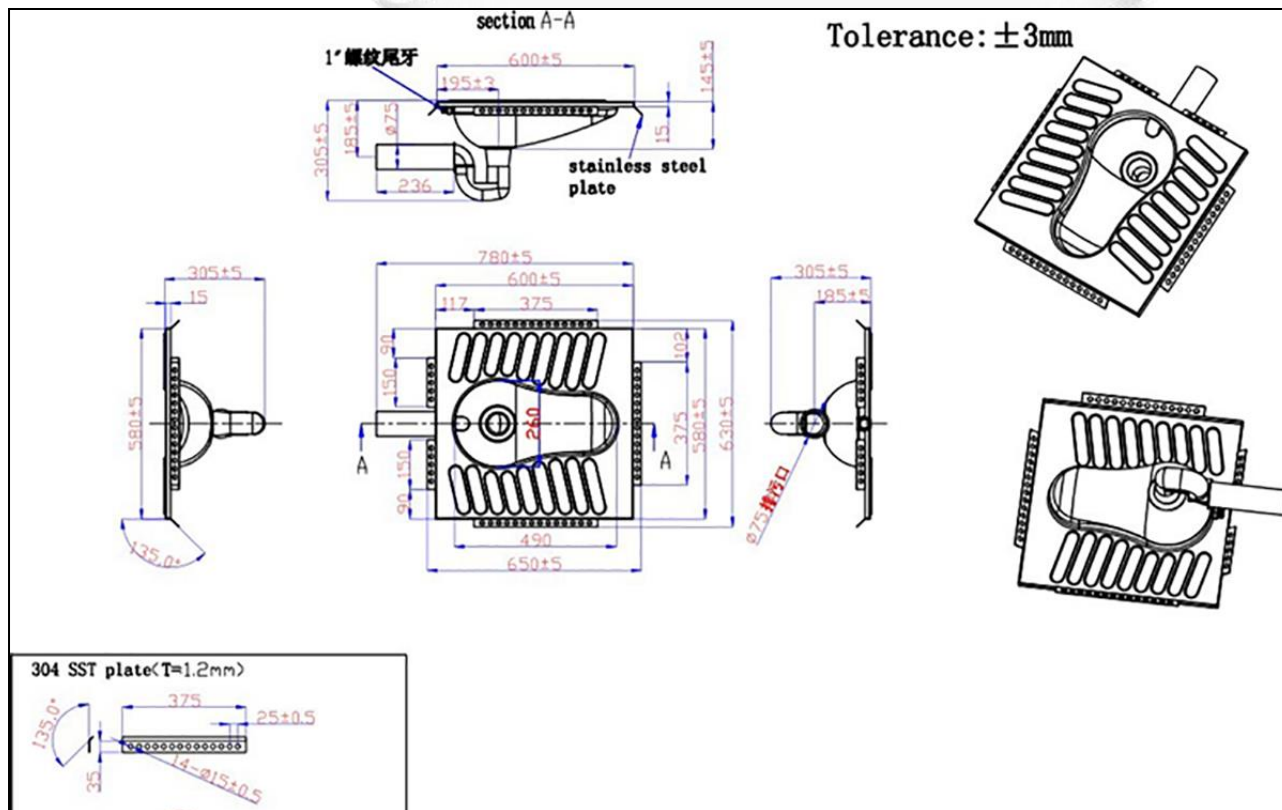

Stainless Steel Squatting Pan




SN- ST501A

Stainless Steel Square Shower Tray

Size: 700x700x98 mm
 Surface: satin
 Material: 304 or 316 Stainless Steel
 Thickness: 0.8mm
 N.W. (weight): 5
 G.W. (weight): 7
 Drainage way: P or S-trap

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied.

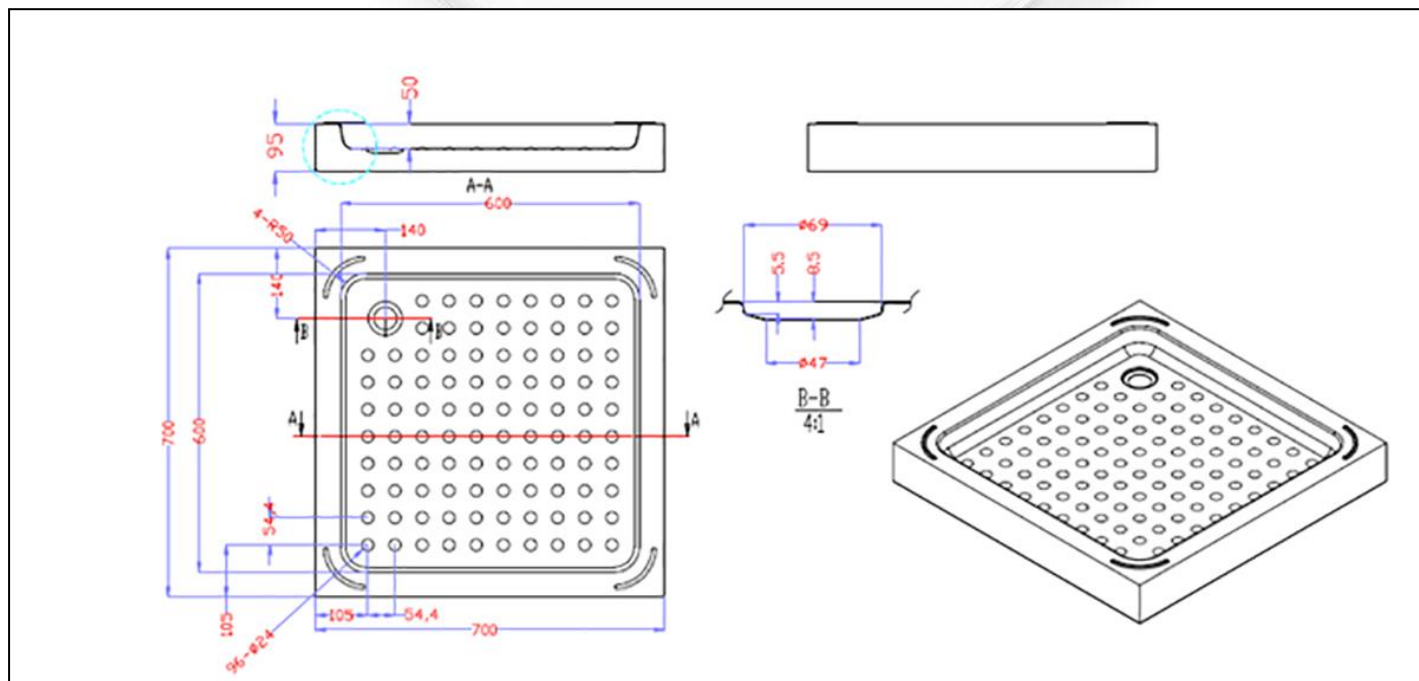

Stainless Steel Squatting Pan




SN-ST502-1200

SUS Shower Tray

Size: 1200x700x125 mm
 Surface: satin
 Material: 304 or 316 Stainless Steel
 Thickness: 0.8 mm
 N.W.(weight): 11
 G.W.(weight): 13
 Drainage way: P or S-trap

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied.

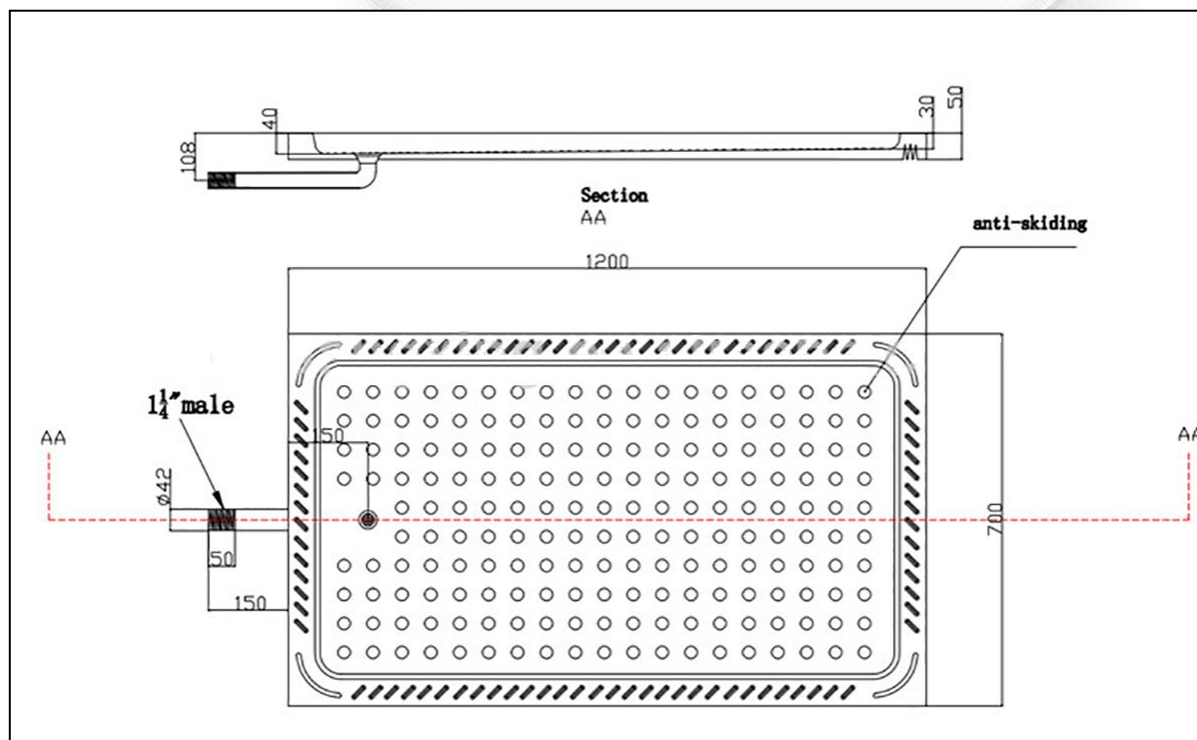

Stainless Steel Squatting Pan



SN-ST503

Stainless Steel Shower Tray

Size: 900x900x125 mm

Surface finish: satin


Material: 304 or 316 grade stainless steel

N.W. (KGS): 16

G.W. (KGS): 19

Widely use in public place such as airports, train, bus, night club, hospital, school, hotel and private house

Floor mounted or wall installed, simple and stable, all accessories supplied.

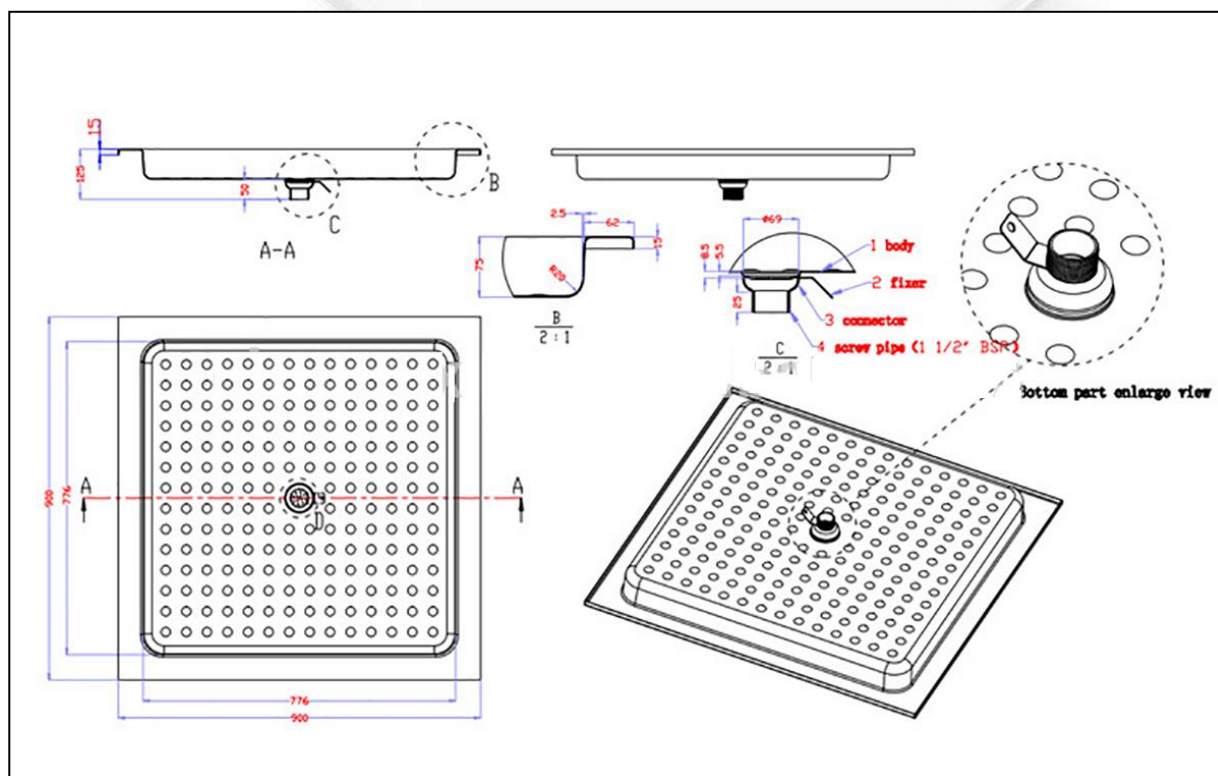




SN-SH27

Circular Stainless Steel 304 Waste Chute

Material: 304 stainless steel satin finish

Type-300, 24-gauge (0.6mm)

- 5" 130mm 7/16" 11mm 5-1/2" 140mm
- Silicone Sealant Countertop 6-15/16" 175mm Dia.
- Recommended Height Off Floor
- For Universal / Barrier-Free Design 34" 865mm

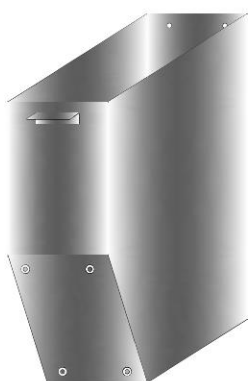

SN-SH28

Wall Mounted Dust Bin

- Wall mounted flip up dust bin
- Material: #304 stainless steel
- Overall size: H500 x D340 x W230





Sanital Public Washroom Products Inc.

mail@sanital.co

www.sanital.ca

International Distributors:

Emad A. Al Mohtaseb Trading Est.

P.O. Box : 13802, Jeddah 21414
Baladiya St. Al Suhaily Center, **Saudi Arabia**

Tel. : +96612 6613173
Fax. : +96612 6611076
Mobile : 0502647179
E-mail : sanital@ymail.com
www.sanitalinc.com

Arcom Building & Decoration Products LLC.

P.O. Box: 413524 Business Bay- Empire Heights
Office No. A-1203. Dubai **UAE.**

Tel No. : 8880188
Mobile : +971564995056
E-mail : arcomproducts@mail.com
www.sanitalinc.com